

1001 Trout Brook Crossing Rocky Hill, CT 06067-3910 Telephone: (860) 571-5100 FAX: (860) 571-5465

Product Description Sheet 300 ml Cartridge Pusher

Part # 98022


North American Equipment, January 2002

PRODUCT DESCRIPTION

LOCTITE® 300 ml Cartridge Pusher is used to dispense low viscosity to high extrusion rate pastes from 300 ml cartridges. The cartridge pusher is a front loaded, freestanding device that mechanically applies pressure to the cartridge plunger using a pneumatically driven ram.

PRODUCT FEATURES

- Front loaded, free standing 300 ml cartridge pusher
- Pneumatically driven ram
- Equipped with a 0 to 60 psi adjustable pressure regulator
- Low level sensor
- Can be mounted vertically or horizontally
- Compatible with Loctite Single or Three Function Controllers or existing work cells

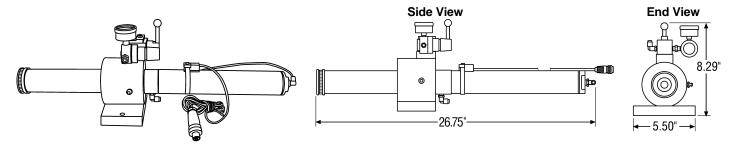

Technical Data

- Pneumatic Supply: 50 psi minimum 100 psi maximum
- Air Quality: Filtered 10um, oil free, non-condensing
- Pneumatic Hose Size: minimum 4mm I.D.
- Overall dimensions: 8 3/8" high x 5 1/2" wide x 26 3/4" deep
- Operating Temperature 10°C to 40°C (50°F to 104°F)
- Weight: 10.6 lbs.

300 ml Cartridge Pusher Includes:

- Operation Manual, P/N 984744
- Fitting Kit, P/N 984837

Recommended Spare Parts:

- Cartridge Sleeve Kit, P/N 984826
- Black Teflon® Lined Feed Tube 3/8" x 33 feet, P/N 97970
- Black Teflon® Lined Feed Tube 1/4" x 33 feet, P/N 97972

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, LOCTITE CORPORATION SPECIFICALLY DISCLAIMS ALL WARRANTIES EXPRESSED OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ARISING FROM SALE OR USE OF LOCTITE CORPORATION'S PRODUCTS. LOCTITE CORPORATION SPECIFICALLY DISCLAIMS ANY LIABILITY FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES OF ANY KIND, INCLUDING LOST PROFITS. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Loctite Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.