

# Polybit



## Bitustick Cool - The next generation of preformed bituminous coatings


- Excellent durability over time
- Resistance to hydrostatic pressure
- Uniform thickness – controlled application



**6X** FASTER  
APPLICATION

Henkel

Quality for Professionals

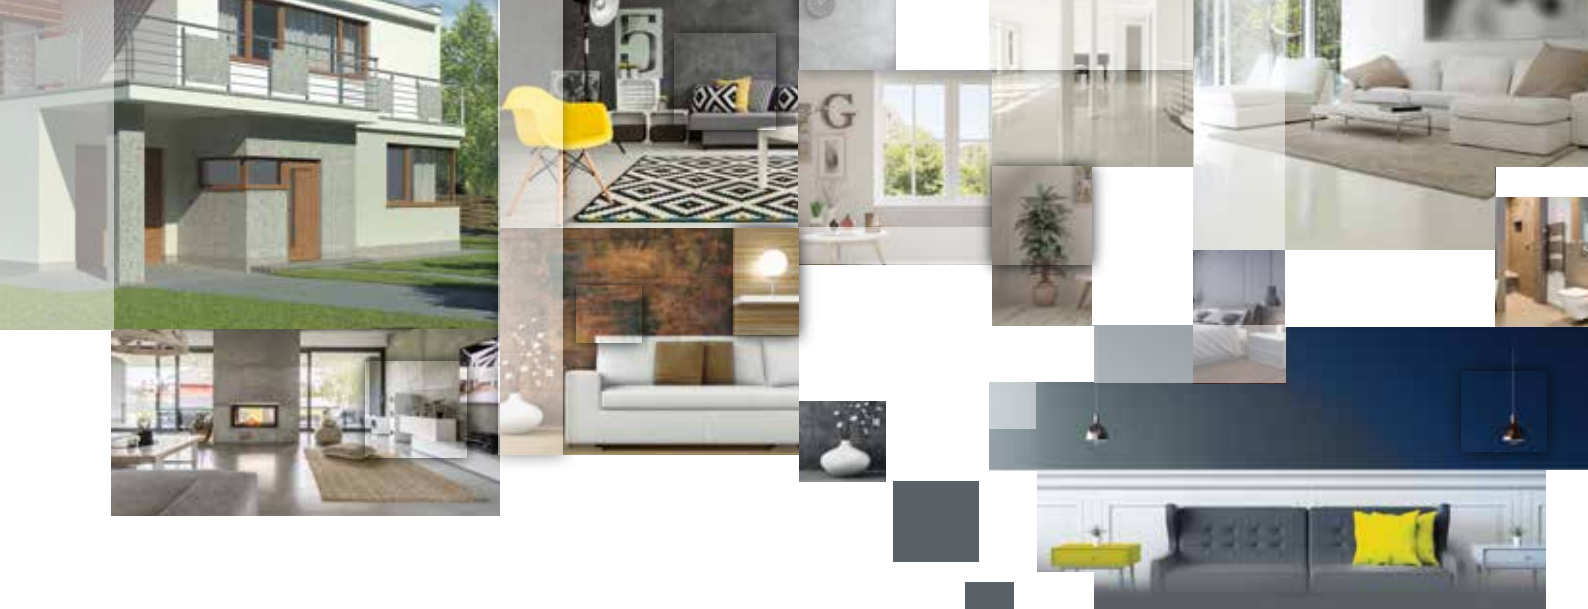

## Bitustick Cool


### Preformed self-adhesive bituminous coating membrane

Be it for an individual villa, a residential compound or any other below the ground concrete structure where the water table is low, choosing the right waterproofing solution will reflect not only on the longevity of the project, but also on the resources efficiency during the construction phase.

Bitustick Cool, the new generation of bitumen coatings, comes packed up with all the added benefits required to ensure a more efficient and controlled application, superior technical properties and high durability, offering as such, an innovative, easy to use waterproofing solution that professionals can rely on.

## Secured Sealing

Unlike the traditional liquid applied coatings, just one layer of Bitustick Cool, with its high elongation and flexibility properties, is able to bridge the cracks developed in the concrete and seal all the pin-holes, providing complete protection from water, moisture and chloride ingress, while its quality assurance build-in system will ensure an uniform thickness applied all around the surface.

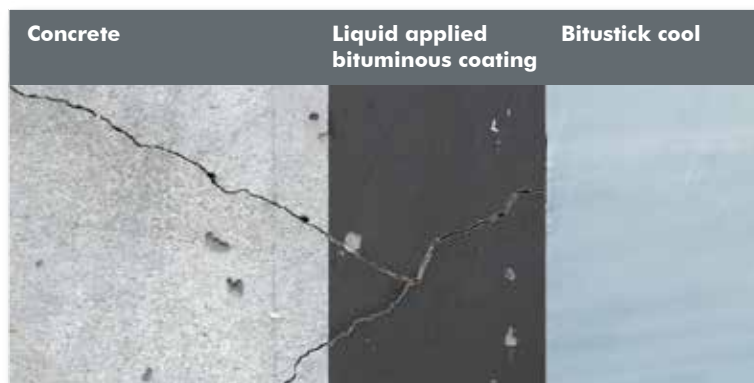

## Key Benefits



Secured Sealing



Resistant to Hydrostatic Pressure




Chemical Resistant



Puncture Resistant


## Fields of Application



Boundary Walls



Base Slabs



Manholes



Shallow Footings



Henkel Polybit Industries Ltd.  
 PO Box: 293, Umm Al Quwain, UAE  
 Phone: +971 (6) 76 70 777, Fax: +971 (6) 76 70 197  
[henkelpolybit@henkel.com](mailto:henkelpolybit@henkel.com)  
[www.henkelpolybit.com](http://www.henkelpolybit.com)

Henkel Polybit Industries Ltd.  
 PO Box: 5911, Dammam - 31432  
 Industrial Area - II, Kingdom of Saudi Arabia  
 Phone: +966 13 808 4061 / 62, Fax: +966 13 812 1164  
[polybitdammam@henkel.com](mailto:polybitdammam@henkel.com)