



**It's worth doing the job  
as if doing it for yourself**



**Polybit Tiling Solutions  
Best results and  
customer satisfaction**



**Quality for Professionals**





## CM 9

**Tile adhesive for indoor areas**



### CHARACTERISTICS

- For ceramic tiles (glazed, terracotta), porcelain tiles, mosaic tiles
- For indoor areas
- For walls and floors
- Suitable for wet areas
- Easy workability

### AREAS OF APPLICATION

- Indoor areas: lobby, bedroom, living rooms, staircase, etc.
- Wet areas: kitchen, toilet, bathroom (excluding swimming pools, water tanks which store water constantly).


### COVERAGE

2.5kg - 8kg for even substrates (consumption can vary depending on the evenness on the substrate, trowel notch depth and the type of tiles).

### APPLICATION THICKNESS

A thickness of 3mm to 10mm can be achieved.

Packaging: 25kg paper bag  
Colours: Grey - 25kg  
White - 20kg, 25kg

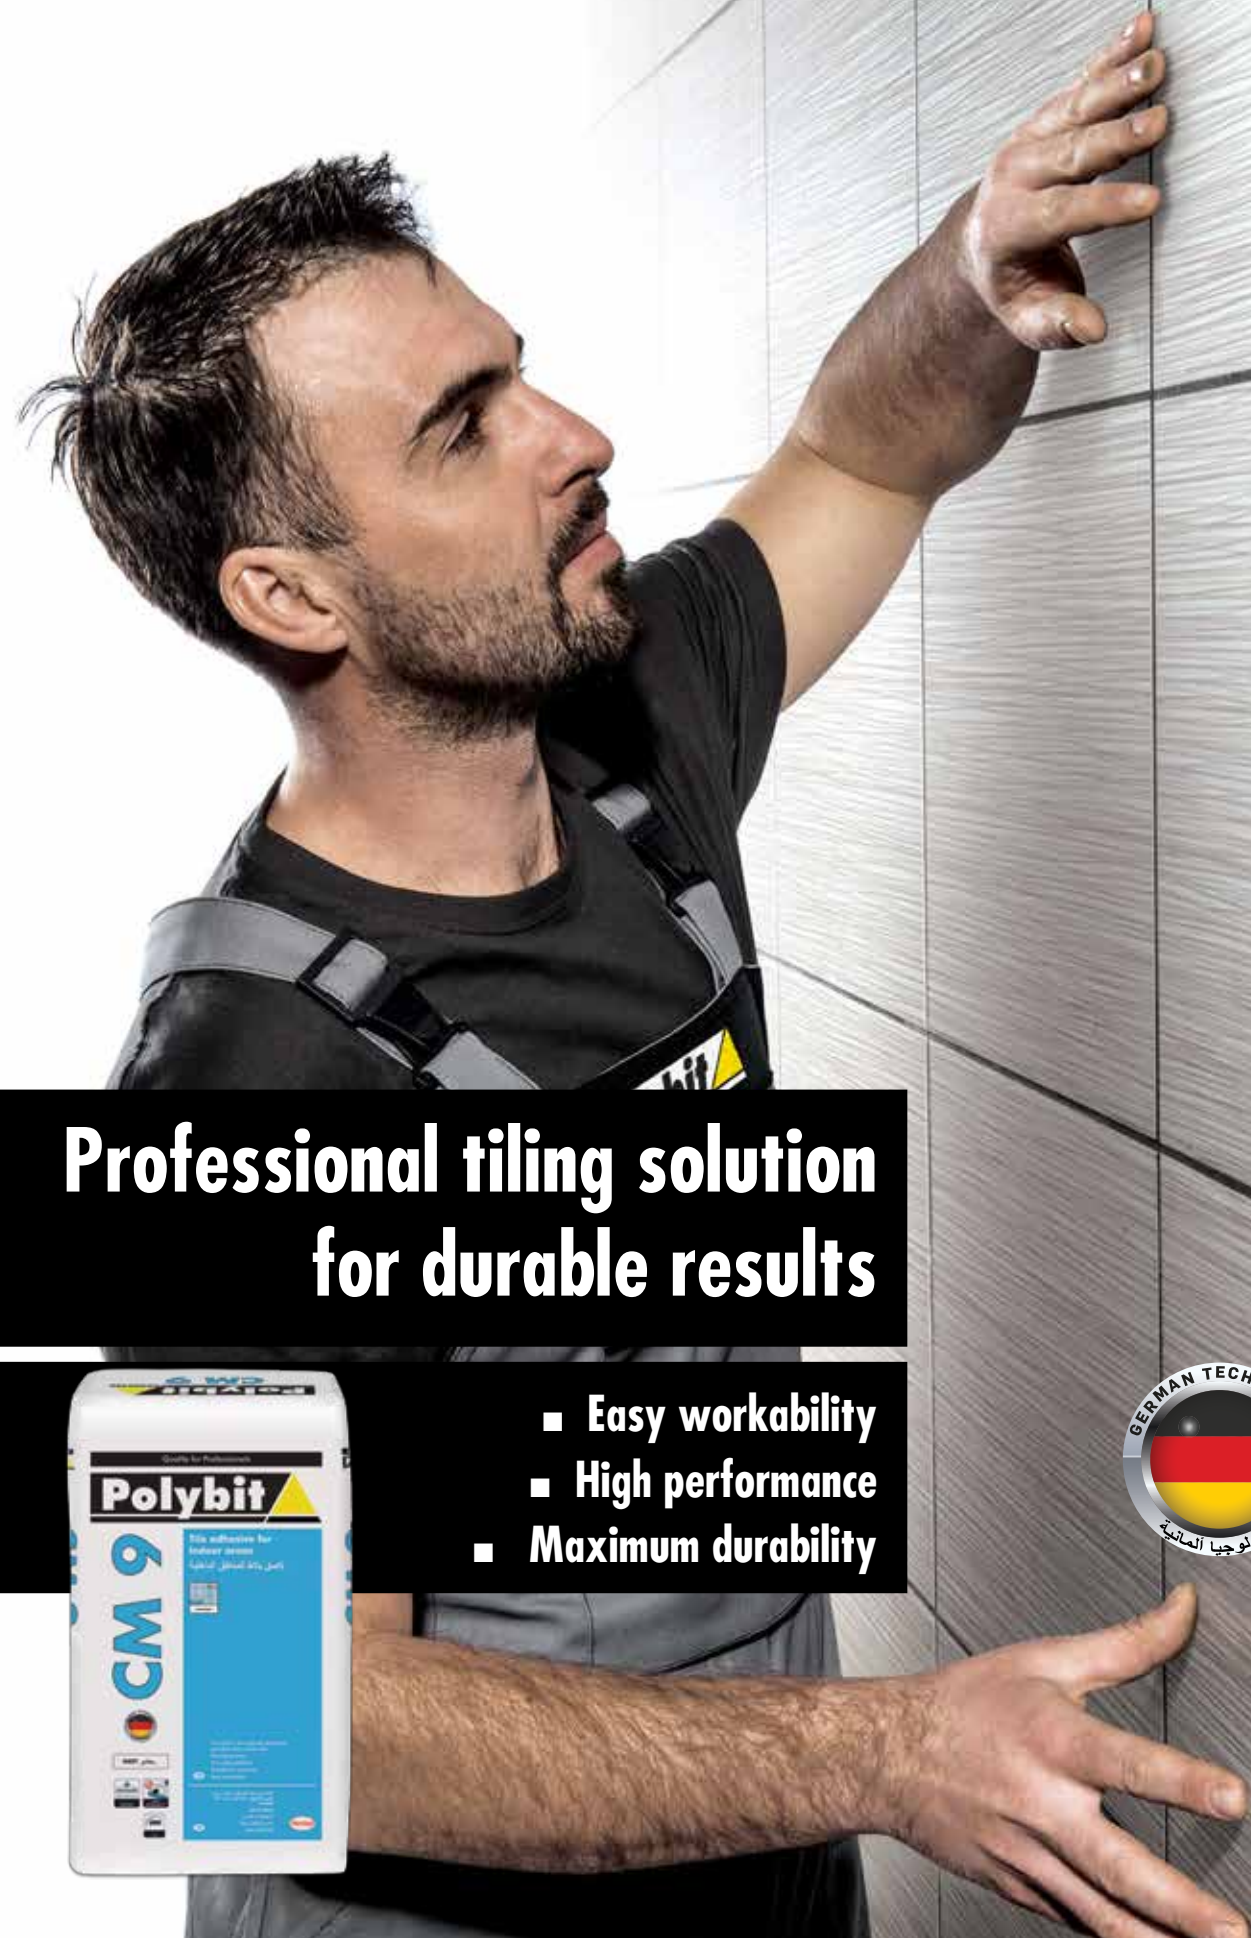

## Professional tiling solution for durable results

- Easy workability
- High performance
- Maximum durability







## CM 11

**Tile adhesive for indoor and outdoor areas**



### CHARACTERISTICS

- For ceramic tiles (glazed & terracotta), vitrified tiles, porcelain tiles, mosaic tiles and natural stones like granite, sand stone
- For indoor and outdoor areas
- Non-slip, perfect for walls
- Suitable for wet areas

### AREAS OF APPLICATION

- Indoor and outdoor areas: Utility rooms as cellars, storerooms, drying rooms, corridors, stairs, anterooms, living rooms, parking, balconies, terraces
- Wet areas: kitchen, toilet, bathroom (with periodic water penetration).


### COVERAGE

1.8kg - 4.6kg for even substrates (consumption can vary depending on the evenness on the substrate, trowel notch depth and the type of tiles).

### APPLICATION THICKNESS

A thickness of 2mm to 10mm can be achieved.

Packaging: 25kg paper bag  
Colours: White & Grey



## Polybit CM 11

### Performance has a new name

- Non-slip formula
- Suitable for indoor and outdoor
- Recommended for wall applications








## CM 16

Flexible tile adhesive for wet areas and swimming pools

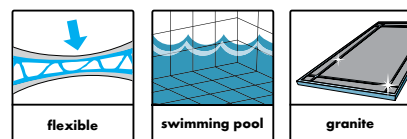

### CHARACTERISTICS

- For ceramic tiles (glazed & terracotta), vitrified tiles, porcelain tiles, mosaic tiles and natural stones like granite, sand stone, marble
- Flexible - polymer modified
- For indoor and outdoor areas
- Non-slip, perfect for walls
- Suitable for wet areas and swimming pools

### AREAS OF APPLICATION

- Indoor and outdoor areas: Utility rooms as cellars, storerooms, drying rooms, corridors, stairs, anterooms, living rooms, parking, balconies, terraces
- Wet areas: Swimming pools, bathrooms, kitchens, toilets.


### COVERAGE

1.8kg - 4.6kg for even substrates (consumption can vary depending on the evenness on the substrate, trowel notch depth and the type of tiles).

### APPLICATION THICKNESS

A thickness of 2mm to 10mm can be achieved.

Packaging: 25kg paper bag  
Colours: White & Grey




## CM 16 tile adhesive Your swimming pool expert

- Unmatched performance
- Slip control formula
- Perfect for wet areas and swimming pools




Quality for Professionals



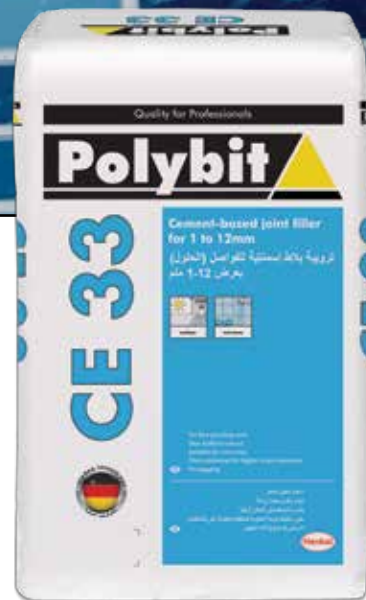

## CE 33

**Cement-based joint filler for 1 to 12mm**

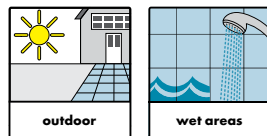

### CHARACTERISTICS

- For fine grouting work
- New, brilliant colours
- Suitable for wet areas
- Fibre reinforced for higher crack resistance

### AREAS OF APPLICATION

- Indoor and outdoor areas: Utility rooms as cellars, storerooms, drying rooms, corridors, stairs, anterooms, living rooms, parking, balconies, terraces
- Wet areas: Bathrooms, kitchens, toilets.


### COVERAGE

0.3kg - 0.6kg/m<sup>2</sup> independent upon the size and thickness of tiles.

### APPLICATION THICKNESS

Joint width of 1mm to 12mm can be achieved.

Packaging: 10kg paper bag  
Colours: Available in 12 standard colours

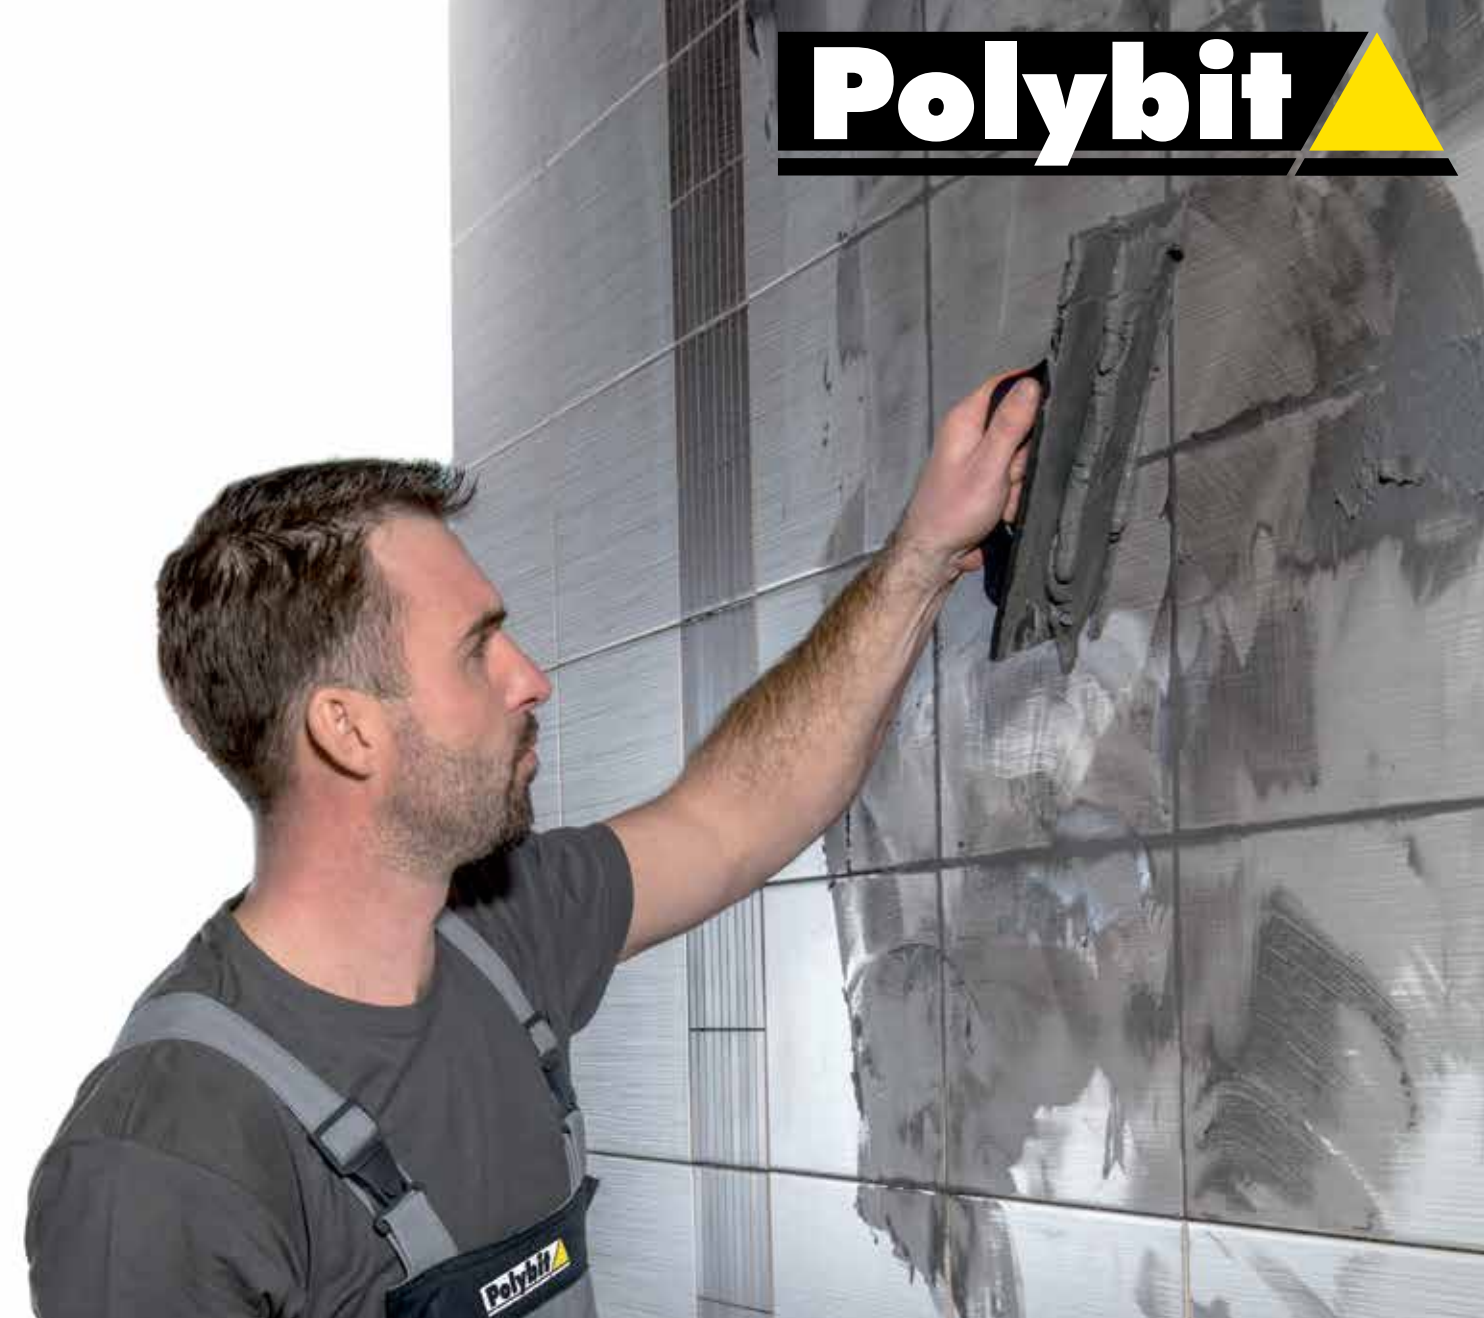


## Your reliable grouting solution



- Suitable for wet areas
- Stable and resistant colors
- Higher crack resistance






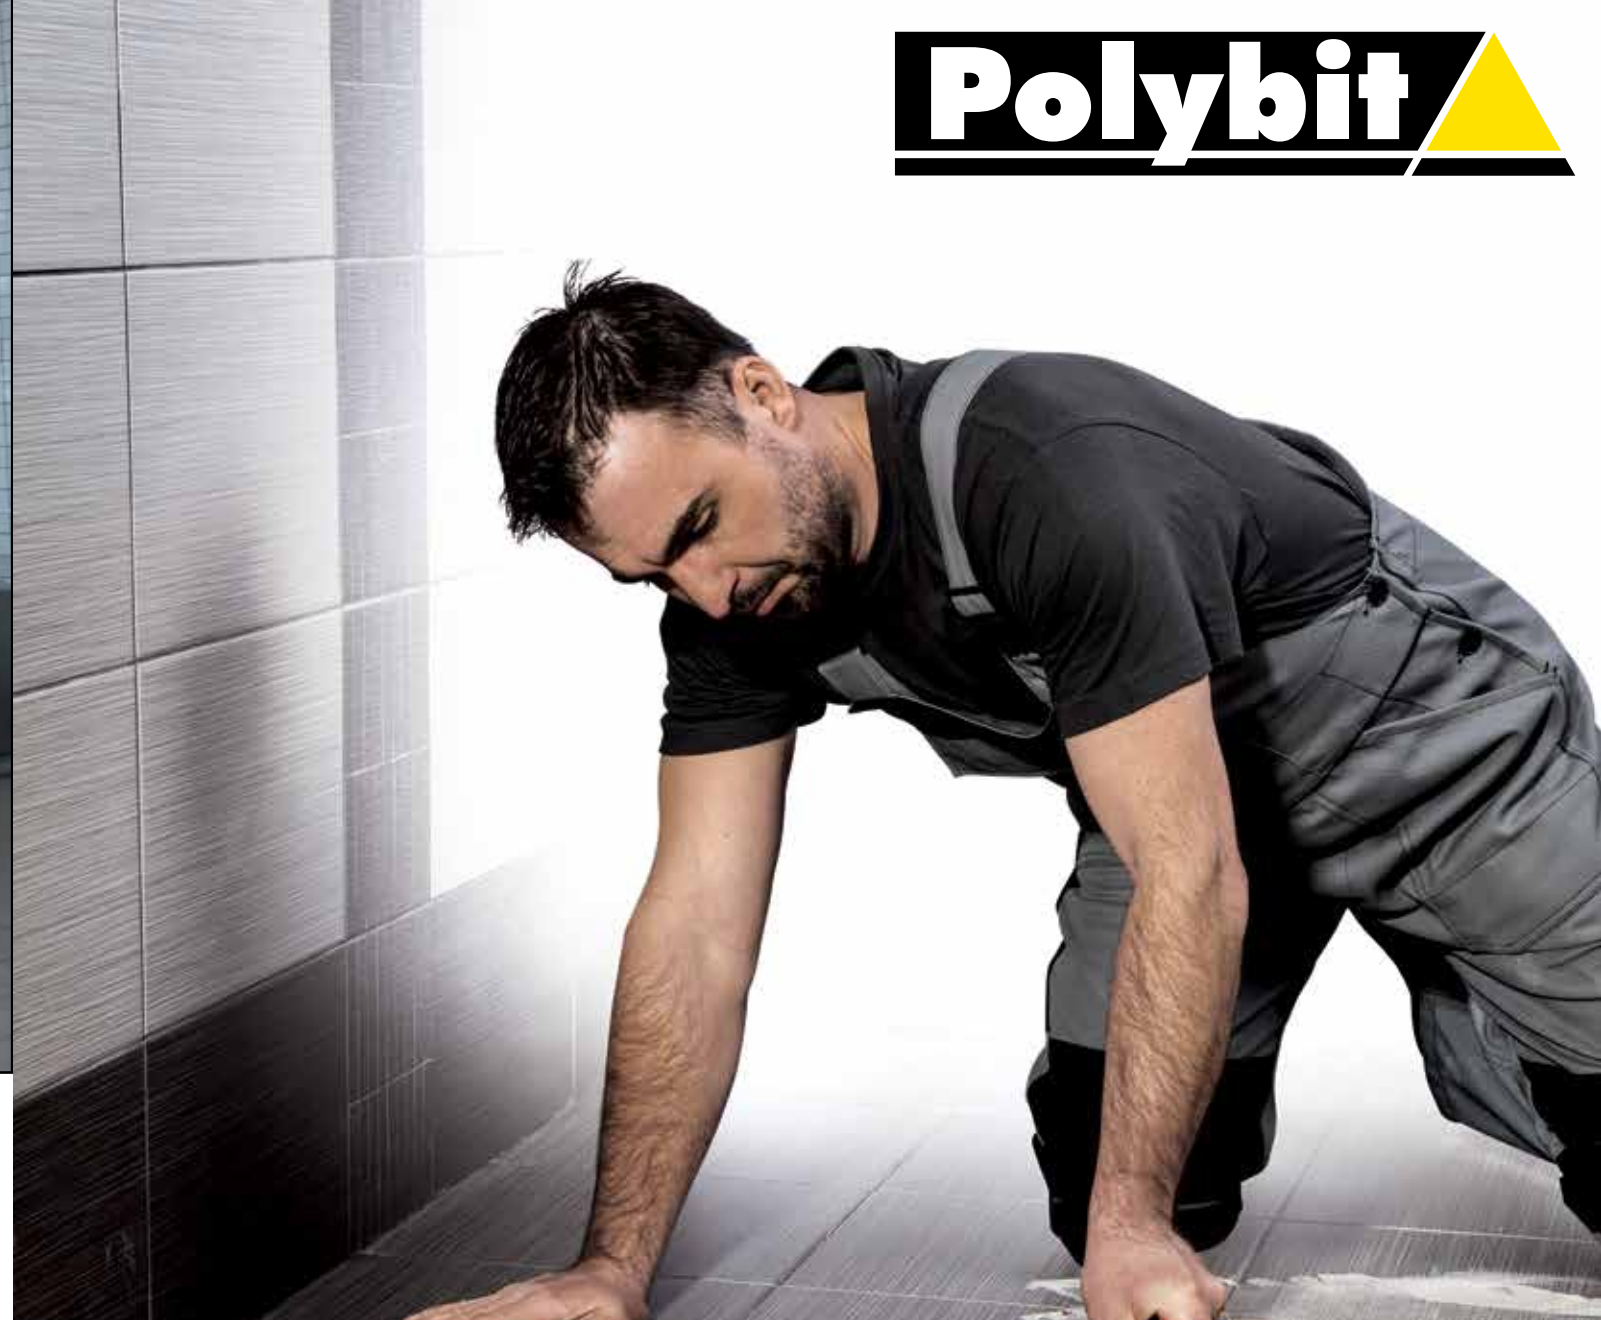

## CE 47

### Epoxy joint filler

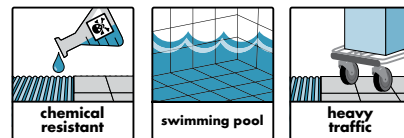

Packaging: 5kg kit  
Colours: Available in Grey and White standard colours

#### CHARACTERISTICS

- Easy application
- Water cleanable
- Suitable for wet areas
- Chemical-resistant
- Solvent-free

#### AREAS OF APPLICATION

- For grouting areas exposed to aggressive substances, e.g. in medicinal baths, dairies, commercial kitchens, battery stores, car washes, breweries, silos, stables, swimming pools, laboratories.
- Suitable for use indoors, outdoors, in permanently wet and in drinking water areas.

#### COVERAGE

0.8kg - 1.9kg/m<sup>2</sup> independent upon the size and thickness of tiles.

## Epoxy joint mortar for high chemical stress areas

- Chemical-resistant
- Water cleanable
- Solvent-free





# Polybit



**Henkel Polybit Industries Ltd.**

PO Box 293, Umm Al Quwain, UAE

Tel. +971 6 7670777, Fax. +971 6 7670197

E-mail: [polybit@henkelpolybit.com](mailto:polybit@henkelpolybit.com)

[www.henkelpolybit.com](http://www.henkelpolybit.com)

**Quality for Professionals**