

# Polybit




## Watertite Xtreme the ultimate waterproofing protection

- Resistant to high hydrostatic pressure
- Permanent bond to fresh concrete
- Fast, safe and environmentally friendly application



RESISTANCE TO  
HYDROSTATIC PRESSURE



STICK-TO-CONCRETE  
TECHNOLOGY

Henkel


Quality for Professionals



## Watertite Xtreme

Stick-to-concrete loose laid waterproofing membrane system

Watertite Xtreme is a single laid waterproofing membrane system using HDPE cross-lamination and stick-to-concrete technology. The highly flexible polymer modified bitumen is laminated with HDPE film and tough polypropylene fleece, ensuring superior mechanical properties and enabling the system to be fully bonded with freshly poured concrete, providing the ultimate waterproofing protection and becoming an integral part of the structure, regardless the structural movements. Moreover, Watertite Xtreme is ensuring fast and easy application, providing a unique advantage, cost and time wise, while is fully complied with the latest green building standards, ensuring zero emissions on site, as no torch on is needed for its application.

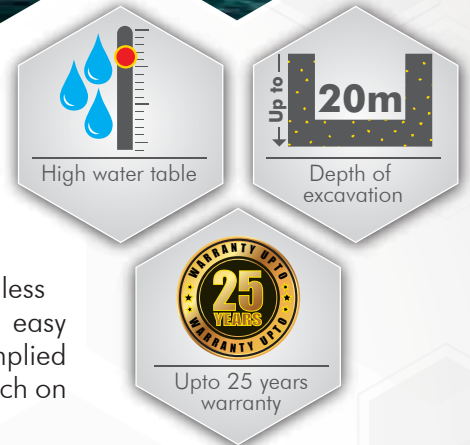

## Main Advantages

Independent of structural movements

Excellent mechanical strength

Fast, easy and safe application

Strong & permanent bond with concrete

## Fields of Application

Commercial and residential buildings

Deep structure near to sea

Structures under high hydrostatic pressure

## Why Watertite Xtreme?

	Watertite Xtreme System (Single layer)	PVC System (Single layer)
Independent to structural movements	★★★★★	★★★★☆
Productivity   Cost - Time - Resources	★★★★☆	★★★★☆
No need for additional protection	★★★★★	★★★★☆
No emissions - more environmentally friendly	★★★★★	★★★★☆
Ease of application	★★★★★	★★★★☆
Work Safety	★★★★★	★★★★☆
Lack of lateral water migration	★★★★★	★★★★☆
Moisture Insensitivity	★★★★★	★★★★★



Henkel Polybit Industries Ltd.  
PO Box: 293, Umm Al Quwain, UAE  
Phone: +971 (6) 76 70 777, Fax: +971 (6) 76 70 197  
henkelpolybit@henkel.com  
www.henkelpolybit.com

Henkel Polybit Industries Ltd.  
PO Box: 5911, Dammam - 31432  
Industrial Area - II, Kingdom of Saudi Arabia  
Phone: +966 13 808 4061 / 62, Fax: +966 13 812 1164  
polybitdammam@henkel.com