


TECHNICAL DATA	CX 5	CX 10	CX 15	CX 20
Packaging	2 or 5 kg bucket; 5 or 25 kg bag	850 ml can	25 kg bag	2, 5 or 20 kg bag
Consistency to apply	creamy	foamy	fluid	creamy
Working time (at 23°C)	4 min	5-9 min	1 hour	20 min
Temperature range	5-30°C	5-35°C	0-25°C	5-30°C
Consumption / efficiency*	1.6 kg/l cavity volume	10-12m ² *	1.8 kg/l cavity volume	1.6 kg/l cavity volume
Shrinkage	no	no	no	no
Water resistant	✓	no	✓	✓
Bonding time	5 min	20 min	1 h	20 min
Frost-resistant	✓	✓	✓	✓
Ready to use		✓		
Indoor & outdoor application	✓	✓	✓	✓
Horizontal surfaces	✓	✓	✓	✓
Vertical surfaces	✓	✓		✓

COMPRESSIVE STRENGTH (MPa)	CX 5	CX 15	CX 20	FLEXURAL STRENGTH (MPa)	CX 5	CX 15	CX 20
	EN 12190				EN 13892-2	EN 196-1	EN 1015-11
AFTER 1 HOUR	≥ 11 *			AFTER 6 HOURS	≥ 3,0		≥ 2,5
AFTER 2 HOUR	≥ 12 *		≥ 4 *	AFTER 24 HOURS	≥ 3,0	≥ 4,5	≥ 3,5
AFTER 6 HOURS	≥ 15		≥ 15	AFTER 28 DAYS	≥ 6,0	≥ 7,0	≥ 4,2
AFTER 24 HOURS	≥ 25	≥ 35	≥ 17				
AFTER 7 DAYS		≥ 60					
AFTER 28 DAYS	≥ 40	≥ 70	≥ 33				

* according to independent laboratory analyses

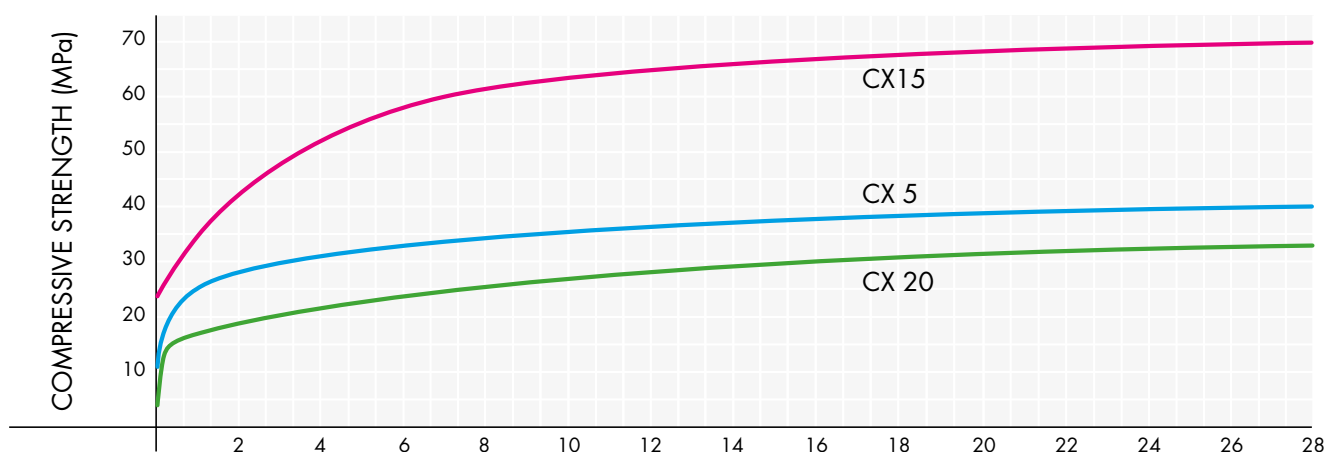

ADHESION TO RIBBED REINFORCING BARS Ø16 MM COVERED WITH CONCRETE MORTAR (MPa)	CX 5	CX 15	CX 20
	EN 12190		
IN DRY CONDITIONS	≥ 16	≥ 14	≥ 11
IN WET CONDITIONS	≥ 16	≥ 12	≥ 10,5