

# BEKRON PASTES PRODUCTS

## Environmental Product Declaration

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021



Programme:	The International EPD <sup>®</sup> System EPD registered through the fully aligned regional programme/ hub: Latin American Hub, <a href="http://www.epd-latinamerica.com">www.epd-latinamerica.com</a> <a href="mailto:info@environdec.com">info@environdec.com</a>
Programme operator:	EPD <sup>®</sup> Latin America EPD International AB  Regional Hub: Latin American Hub of the International EPD <sup>®</sup> System
EPD registration number:	EPD-IES-0018035
Publication date:	2025-01-09
Valid until:	2030-01-09
Geographical scope:	Chile
This EPD is of the type "EPD of multiple products, based on a product representative from the product group"	
This EPD covers the following products: Bekron AC Paste, Bekron DA Paste, Bekron Vinílico, and Bekron Alfombra	
An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at <a href="http://www.environdec.com">www.environdec.com</a>	

## Content

1.	General Information.....	3
2.	Aislantes Nacionales SPA.....	5
3.	The product.....	6
3.1.	Bekron AC Paste.....	6
3.2.	Bekron DA Paste.....	7
3.3.	Bekron Vinílico.....	7
3.4.	Bekron Alfombra.....	8
4.	Content declaration.....	8
5.	Distribution packaging.....	9
6.	Biogenic Carbon Content Information.....	9
7.	LCA Rules.....	10
7.1.	Declared unit.....	10
7.2.	System boundary.....	10
7.3.	Description of information modules.....	11
7.4.	Description of the manufacturing process.....	12
7.5.	Assumptions.....	12
7.6.	Cut off criteria.....	12
7.7.	Allocation.....	12
7.8.	Time representativeness.....	13
8.	Environmental performance.....	13
8.1.	Potential environmental impact.....	13
8.1.1.	Global Warming Potential (GWP-GHG).....	15
8.2.	Use of resources.....	15
8.3.	Waste categories and output flows.....	15
8.4.	Variation on the environmental performance indicators.....	16
9.	Certifications.....	17
10.	Contact information.....	18
11.	References.....	19

# 1. General Information

Programme information	
<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:info@environdec.com">info@environdec.com</a>

Accountabilities for PCR, LCA and independent, third-party verification	
<b>Product Category Rules (PCR)</b>	
CEN standard EN 15804:2012+A2:2019/AC:2021 serve as the core Product Category Rules (PCR)	
Product category rules (PCR): 2019:14 Construction products. Version 1.3.4 published April 30th, 2024.	
PCR review was conducted by: The Technical Committee of the International EPD System. See <a href="http://www.environdec.com">www.environdec.com</a> for a list of members. Review chair: Claudia A. Peña, University of Concepción, Chile. The review panel may be contacted via the Secretariat <a href="http://www.environdec.com/contact">www.environdec.com/contact</a> .	

Life Cycle Assessment (LCA)	
LCA accountability:	Solano Andrea, Sanchez Fredd, González Mireya, Center for Life Cycle Assessment and Sustainable Design – CADIS.

Third-party verification	
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:	
<input checked="" type="checkbox"/> EPD verification by individual verifier	
Third-party verifier:	
VERIFIER:	Itxaso Trabudua, IK INGENIERIA <a href="mailto:i.trabudua@ik-ingenieria.com">i.trabudua@ik-ingenieria.com</a>
OBSERVER:	Ana de la Puente, IK INGENIERIA <a href="mailto:a.delapuerta@ik-ingenieria.com">a.delapuerta@ik-ingenieria.com</a>
Approved by: The International EPD® System	

Procedure for follow-up of data during EPD validity involves third party verifier	
<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

This EPD was prepared in conformity with the international standard ISO 14025 and EN 15804:2012+A2:2012 Sustainability of Construction Works; for the Bekron pastes.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

## Products information

Product	Bekron Cementitious adhesives
Declaration owner:	Aislantes Nacionales SPA planta Senador Jaime Guzmán 220 Comuna de Quilicura Santiago Chile en Chile <a href="https://www.henkel.cl/">https://www.henkel.cl/</a>  Contact person: Massimo Collotta: massimo.collotta@henkel.com
Description of the construction product	The pastes include four products: Bekron AC Paste, Bekron DA Paste, Bekron Vinflico, and Bekron Alfombra. These products are used in the application of slabs, composite slabs, post-tensioned slabs, smooth and heated slabs. They are used on walls and floors, indoors and outdoors. They are also used for flexible coatings such as carpets, textiles, PVC, rubber, and parquet.
Declared	1000 kilograms of pastes manufactured and packaged during the year 2022 by AISLANTES NACIONALES SPA. at the Senator Jaime Guzmán plant 220 Commune of Quilicura Santiago Chile in Chile.
Construction product identification:	Central Product Classification: 3753 - Articles of plaster or of compositions based on plaster
Main product components:	Pastes are manufactured from water, additives and dispersions.
Life cycle stages not considered:	The modules: A4, A5, B1, B2, B3, B4, B5, B6, B7.
Statement content:	This environmental product declaration is based on information modules that do not cover aspects of construction stage and use. It contains detailed information on the stage of input materials used for the generation of raw material and central process, modules A1, A2, A3, approximations of scenarios C1, C2, C3, C4 and D based on national statistics.  <ul style="list-style-type: none"> <li>• Definition of the product.</li> <li>• Content declaration.</li> <li>• Declared unit.</li> <li>• System boundary.</li> <li>• Environmental performance.</li> <li>• Evidence and verifications.</li> </ul>
Comparability of EPD of construction products:	a. EPD of construction products may not be comparable if they do not comply with EN 15804:2012+A2:2019/AC:2021. b. Environmental product declarations within the same product category from different programs may not be comparable
For more information consult:	<a href="https://www.henkel.cl/">https://www.henkel.cl/</a>
Site for which this EPD is representative	<b>Manufacturing Plant:</b>  <b>Quilicura:</b> Senador Jaime Guzmán 220 Comuna de Quilicura Santiago Chile in Chile <b>Pudahuel:</b> Laguna Sur 9551, Parque Industrial Puerto Santiago, Santiago, Pudahuel, Región Metropolitana in Chile
Intended Public:	B2B (Business to Business)

## 2. Aislantes Nacionales SPA



Aislantes Nacionales SPA settled in Chile in 1985. It is a company that was bought by Henkel in 2018 and maintains the original name locally. Through the business sector known globally as “Adhesive Technologies”, Aislantes Nacionales SPA has recognized brands such as Agorex, Pritt and Loctite. The company has around 345 employees of 12 different nationalities, distributed in the facilities of Pudahuel, Quilicura and Antofagasta.

Aislantes Nacionales SPA is a company that operates globally with leading innovations, brands and technologies in three business areas: Adhesive Technologies, Beauty Care and Laundry & Home Care. Currently, the Adhesive Technologies unit operates directly in Chile; Therefore, it seeks to ensure that its main products aimed at the construction sector comply with the environmental requirements established in Credit MRc2: Materials and Resources of the LEED (Leadership Energy and Environmental Design) Building Certification Program.



### 3. The product

Bekron paste products, manufactured according to the UNE-EN 12004 standard, are designed for a wide variety of construction applications. They are ideal for the application of slabs, composite slabs, post-tensioned slabs, smooth slabs and heated slabs. Their versatility allows them to be used on both walls and floors, indoors and outdoors. In addition, they are used for flexible coverings such as carpets, textiles, PVC, rubber and parquet. This Environmental Product Declaration (EPD) covers several products in the Bekron line, including Bekron AC Paste, Bekron DA Paste, Bekron Vinyl and Bekron Carpet. The results of this EPD are based on the performance of the most representative product in the family, Bekron AC, which constitutes 87% of the total volume of products analysed (see table 1). Therefore, this EPD is applicable to all the products mentioned, guaranteeing their validity in different applications.

Table 1. Percentage variation of the product family

Nº	Product	Contribution to the product category (%)
1	Bekron AC Pasta	87.33%
2	Bekron DA Pasta	12.61%
3	Bekron Vinílico	0.04%
4	Bekron Alfombra	0.02%

#### 3.1. Bekron AC Paste

Adhesive paste for ceramics, porcelain tiles, stoneware, and natural stones, used indoors on plasterboard, fiber cement, plastered masonry walls, etc. It can also be used on rigid walls (concrete).

The characteristics of Bekron AC Paste produced by Aislantes Nacionales SPA are provided in the next table:



Technical characteristics	
Color	Winter White
Appearance	Thick paste
Odor	Slightly ammoniacal
Density	1.7 kg/dm <sup>3</sup>
Maximum applicable thickness	4mm
Working temperature	From 5°C to 23°C
Open time	20 minutes at 20°C
Waiting time before grouting	3 days
Drying	14 to 21 days
Tensile strength	Greater than 10 kg/cm <sup>2</sup>

### 3.2. Bekron DA Paste

Adhesive formulated to adhere ceramics, medium-sized porcelain tiles, marbles, and tiles on partitions, flexible walls, structural walls, and very smooth surfaces.

It offers superior adhesion, high flexibility, and is ready to be applied. It is formulated based on an aqueous dispersion of styrene acrylic copolymer and selected mineral fillers.

The characteristics of Bekron DA Paste produced by Aislantes Nacionales SPA are provided in the next table:



Technical characteristics	
Color	Gray
Appearance	Viscous paste
Density	1.57 kg/dm <sup>3</sup>
Working temperature	From 5°C to 23°C
Open time	50 minutes at 20°C
Correction time	20 minutes
Minimum thickness	2mm
Maximum thickness	4mm
Waiting time before grouting	3 days
Drying	14 to 21 days
Standard	Exceeds Din 18156, Part3
Yield*	1.5 kg/m <sup>2</sup> for each mm of thickness
Moisture resistance	Good

### 3.3. Bekron Vinílico

Adhesive for vinyl coverings. Solvent-free acrylic dispersion formulated for the bonding of PVC coverings.

The characteristics of Bekron Vinílico produced by Aislantes Nacionales SPA are provided in the next table:



Technical characteristics	
Color	Beige
Appearance	Paste
Consumption	350-450 g/m <sup>2</sup>
Waiting time	15 to 20 min (20°C)
Working time	45 min (20°C)
Time before placing weight	Minimum 24 hrs
Maximum strength	Approximately 72 hrs



Resistance to temperature once cured	Up to 70°C
Moisture resistance	Good
Storage time	24 months (23°C, 55% RH)
Storage temperature	10°C to 30°C
Transport temperature	-20°C to 50°C
Application temperature	5°C to 35°C

### 3.4. Bekron Alfombra

Adhesive for coverings. Solvent-free acrylic dispersion formulated for bonding textile coverings with or without foam backing.

The characteristics of Bekron Alfombra produced by Aislantes Nacionales SPA are provided in the next table:



Technical characteristics	
Color	Beige
Appearance	Paste
Consumption	350-450 g/m <sup>2</sup>
Waiting time	15 to 20 min (20°C)
Working time	45 min (20°C)
Time before placing weight	24 hrs approx.
Maximum strength	Approximately 72 hrs
Resistance to temperature once cured	Up to 70°C
Moisture resistance	Good
Storage time	24 months (23°C, 55% RH)
Storage temperature	10°C to 30°C
Transport temperature	-20°C to 50°C
Application temperature	5°C to 35°C



## 4. Content declaration

The composition of these materials consists mainly of additives and water, supplemented to a lesser extent by dispersants. Since most of the materials included in this EPD are made up of these components, Tables 2 and 3 presents, respectively, the content of the materials of the most representative product of the Bekron paste family.

Table 2. Typical content in Bekron AC paste

Product components	Representative product, weight (kg)	Weight variation (kg)*	Postconsumer Recycled material (%)	Biogenic content (kg)
Additives	760,8	(-93.8)-0	0.00%	0.00
Dispersant	70,1	(-56.8) -(+60.4)	0.00%	0.00
Water	169,1	0-(+66.5)	0.00%	0.00
TOTAL	1000	-	0%	0.00
Packaging materials	Weight (kg)	Weight-% (versus the product)		Biogenic content (kg C/product)
Kraft paper	33.0	3%		0.39
Packaging film	0.2	0.2%		0
TOTAL	3.2	3.2%		0.39

\*Range of variation due to mass difference of each material of the products included in the EPD with respect to the representative product according to section 2.2.2.1 of the PCR.

Table 3. Typical content in producto Bekron AC paste

Homogeneous Material or Chemical Substance	Weight (%)	Chemical Substances	CAS Number	Health class <sup>1</sup>
Dispersant	7.01%	Ethylene-vinyl acetate copolymer	24937-78-8	EC/List no.:607-457-0
Water	16.91%	Hydroxide ion	7732-18-5	EC/List no.:686-299-4
Additive	74.74%	Calcium carbonate	471-34-1	EC/List no.:207-439-9
	0.28%	Sodium polyacrylate	9003-04-7	EC/List no.:692-137-3
	0.31%	Hydroxyethyl methyl cellulose	9032-42-2	EC/List no.:618-528-0
	0.13%	Cellulose fiber	9004-34-6	EC/List no.:232-674-9
	0.28%	Attapulgit	12174-11-7	EC/List no.:601-805-5
	0.10%	Mineral oils, semi-synthetic waxes	--	--
	0.07%	5-Chloro-2-methyl-4-isothiazolin-3-one	26172-55-4	EC/List no.:247-500-7
	0.07%	Nonylphenol	84852-15-3	Unlisted
	0.10%	Sodium tripolyphosphate	7758-29-4	EC/List no.:231-838-7

<sup>1</sup>According to EN15804 declaration of material content of the product shall List of Substances of Very High Concern (SVHC) that are listed by European Chemicals Agency.

## 5. Distribution packaging

The packaging material for the paste products consists of plastic buckets packaged with flexible laminated film.

## 6. Biogenic Carbon Content Information

Biogenic carbon from packaging and products was excluded from the system, since by mass it represents less than 5% ("2019:14 Construction products, Version 1.3.4").

## 7. LCA Rules

Environmental potential impacts were calculated in accordance with EN 15804:2012+A2:2019/AC:2021 sustainability of construction works and PCR 2019:14 Construction products Version 1.3.4. This EPD is in accordance with ISO 14025:2006.

Environmental potential impacts were calculated through Life Cycle Assessment (LCA) methodology conformity to

ISO 14040:2006 and ISO 14044:2006. An external third-party verification process of the EPD was conducted according to General Programme Instructions from the International EPD® System Version 4.0. Verification includes a documental review and a validation of both the underlying LCA study and documents describing additional environmental information that justify data provided in the EPD.

### 7.1. Declared unit

**1000 kilograms of Bekron paste manufactured and packaged during the year 2022 by AISLANTES NACIONALES SPA. at the Senator Jaime Guzmán plant 220 Commune of Quilicura Santiago Chile in Chile.**

### 7.2. System boundary

The potential environmental impacts were calculated using the Life Cycle Analysis (LCA) methodology for Bekron pastes according to ISO 14040:2006 and ISO 14044:2006.

According to EN 15804 section 5.2 the next type of EPD is “cradle to gate” with modules C1-C4 and module D (A1-A3 +C+D). This EPD is based on information from previous

processes and central processes, modules A1 to A3, and approximations of scenarios C1, C2, C3, C4 and D based on statistics from the construction sector in Chile (see table 4).

It does not include Construction stage A4-A5 and Use stage B.

Table 4. System boundary of Bekron cementitious adhesives

Life cycle stage	Information about the modules contained in the stages	EPD			
		Cradle-to-gate with modules C1-C4 and module D	Cradle-to-gate with modules C1-C4, module D and optional modules	From cradle to grave and module D	EPD construction services: Cradle to door with modules A1-A5 and optional modules
A1-A3 products stage	A1) Raw material procurement	Mandatory	Mandatory	Mandatory	Mandatory
	A2) Transport				
	A3) Manufacture				
A4-A5 Construction stage	A4) Transport	-	Optional for goods Required for services	Mandatory	Mandatory
	A5) Construction / installation				
B Usage stage	B1) Use	-	Optional	Mandatory	Mandatory
	B2) Maintenance				
	B3) Reparation				
	B4) Replacement				
	B5) Remodeling				
	B6) Operational energy use				
C End of life stage	B7) Operational water use	Mandatory	Mandatory	Mandatory	Optional
	C1) Deconstruction, demolition				

	C2) Transport				
	C3) Waste processing				
	C4) Final disposition				
D Benefits and charges beyond the system limit	D) Reuse, recycling or energy recovery potential	Mandatory	Mandatory	Mandatory	-

### 7.3. Description of information modules

Table 5. Description of the modules included in this EPD.

		Product stage			Construction Process phase		Usage stage					End of life stage				Resource recovery stage	
		Raw material supply	Transport	Manufacturing	Transport	Construction facility	Use	Maintenance	Repair	Restoration	Operational energy use	Operational use of water	Demolition/ Deconstruction	Transport	Waste processing	Disposal	Reuse Recovery Recycling potential
Module	A1	A2	A3	A4	A5	B1	B2	B4	B5	B6	B7	C1	C2	C3	C4	D	
Declared modules	X	X	X	ND	ND	N D	N D	ND	ND	ND	ND	X	X	X	X	X	
Geography	CL GER CN BEL	GER CL BEL CN USA	CL	NA	NA	NA	NA	NA	NA	NA	NA	CL	CL	CL	CL	CL	
Specific data used	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	
Product variation	+308.6%			-	-	-	-	-	-	-	-	-	-	-	-	-	
Sit variation	<10%			-	-	-	-	-	-	-	-	-	-	-	-	-	

X = Declared module; ND = No declared module; GER= Germany, BEL= Belgium, USA=United States of America CL= Chile CN= China

Table 6. Description of the modules included in this EPD.



#### A1) RAW MATERIALS SUPPLY

- Consumption and production of raw materials.
- Consumption and production of electrical energy.
- Consumption and production of natural gas

#### A2) TRANSPORTATION

- Distance of transportation of raw materials and supplies to the manufacturing site.
- Fuel consumption related to internal transportation.

#### A3) MANUFACTURING

- Consumption of auxiliary inputs.
- Air emissions.
- Waste generation.
- Distance of transportation for waste disposal and treatment.

#### C) END OF LIFE

- Deconstruction.
- Transport final destination.
- What can be recycled.
- What goes to fill what is wasted and not recycled

#### D) BENEFITS AND CHARGES BEYOND THE SYSTEM LIMIT

- Avoided loads and benefits

## 7.4. Description of the manufacturing process

The manufacturing process is described in Figures 1:

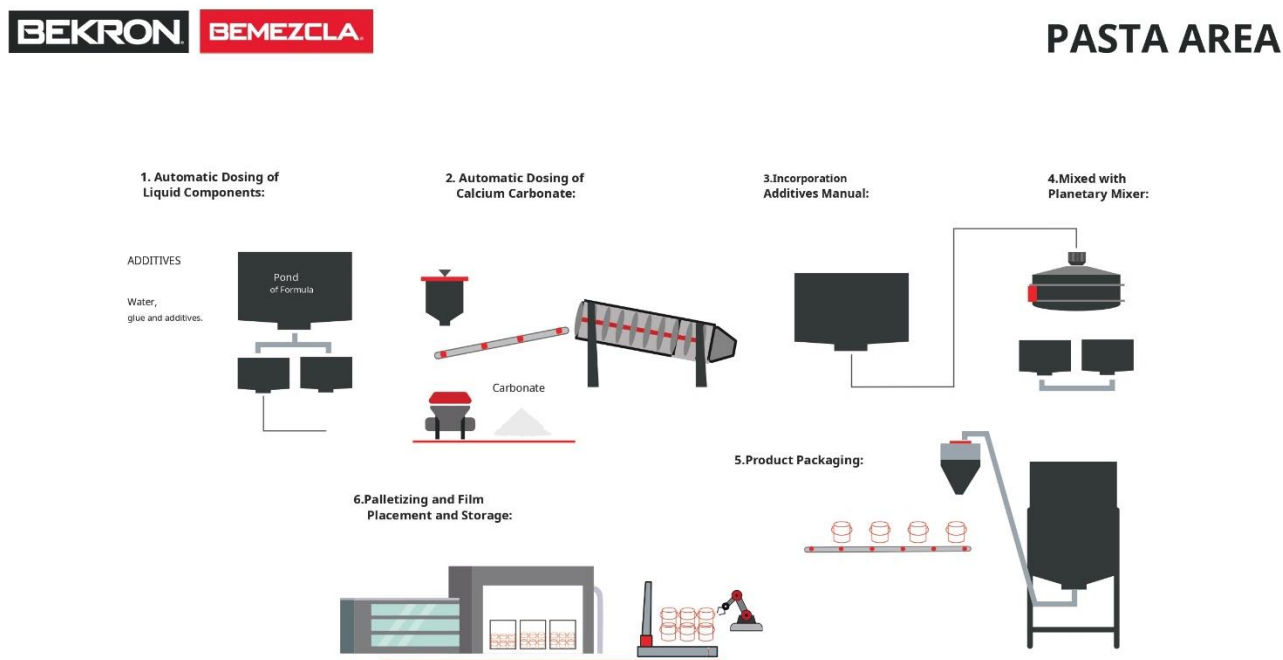


Figure 1. Flow diagram of the manufacturing process of Pastes products (Aislantes Nacionales SPA, 2023).

## 7.5. Assumptions

Considerations were made for each life cycle module, which are shown in the LCA report. This document presents the considerations for the end-of-life module. The assumptions related to the pastes products manufacturing process are presented below.

Life Cycle Module	Assumptions
End of Life	<ul style="list-style-type: none"> <li>It is assumed that 4% of RCD is recycled in Chile (2025)</li> <li>It is assumed that 96% of waste is disposed of in landfills</li> <li>It is assumed that the distance of waste concrete transportation to the recycling site is 250.71 km</li> <li>Fuel consumption and emission data for dismantling and handling of RCD are assumed.</li> </ul>

## 7.6. Cut off criteria

The RCP document establishes that a minimum of 95% of the total flow (material and energy) per module must be included in the LCA. In order to include relevant data, we complied with the established minimum, leaving out of the scope of this study the company's infrastructure, employee transportation activities, administrative activities carried out by employees, personal protective equipment used by workers, as well as inputs used for corrective and preventive maintenance during the study year.

## 7.7. Allocation

In this study, mass allocation was used, based on the annual production of Bekron pastes of Aislantes Nacionales SPA in the reference period.

## 7.8. Time representativeness

Direct data obtained from Aislantes Nacionales SPA is representative for 2022.

# 8.Environmental performance

Below are the results for the basic environmental impact parameters obtained using the EN15804:2012+A2:2019/AC:2021 method "Method V1.02 / EF 3.1 normalization and weighting set (PRé-Sustainability, 2021)" implemented in the SimaPro v.9.5.0.2 software and Ecoinvent 3.9.1 was used for Life Cycle Impact Assessment.

## 8.1. Potential environmental impact

All information modules are reported and valued separately. However, this EPD presents the total impact at all stages for Bekron AC Paste, the most representative product in the production of the Pastes family with 87% of the total production.

Module A1, obtaining raw materials, has a greater contribution to the impact, surpassing 70% in the 14 basic categories, while Module A2, Transport, has a contribution to the impact generated above 10% in 4 impact categories, mostly related to the obtaining of Diesel.

The electricity generation data in CL come from the adaptation in Ecoinvent 3.9 of the Chilean national residual electricity matrix called "Electricity, high voltage {CL-mix residual} | electricity market, high voltage | Cut-off, U", this dataset represents the most recent CL electricity grid by technology type.

As part of the requirements of the PCR, the climate impact as kg CO<sub>2</sub> eq/kWh of the electricity used in the manufacturing process of Leveling, is reported in the next tables. This impact was calculated using the IPCC indicator.

### Electricity impact

Table 7. Electricity Global Warming Potential (kg CO<sub>2</sub> eq/kWh).

Electricity	Quantity
Weighted total of electrical power sources	0.913

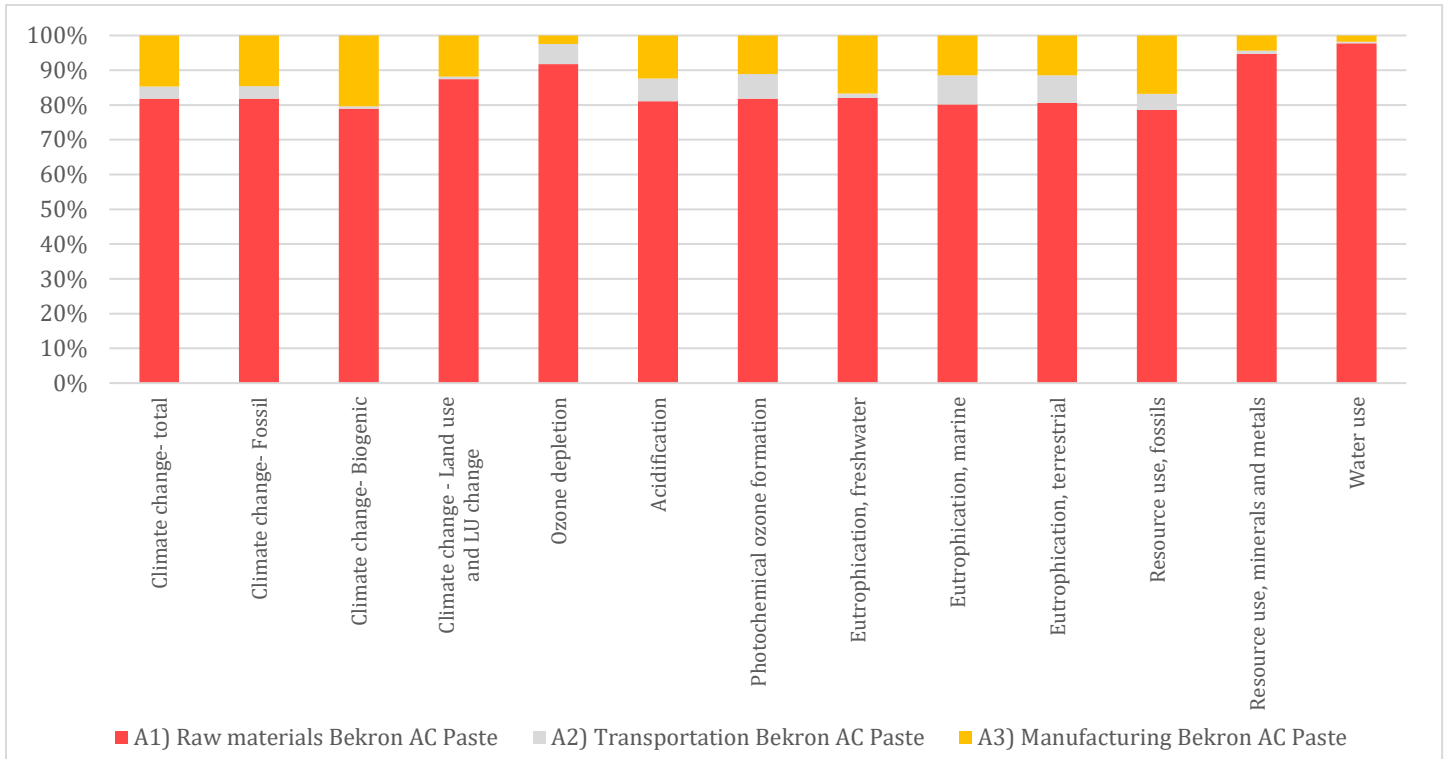


Figure 2. A1-A3 Basic impact categories results of Bekron AC Paste

Table 8. A1-A3, C1-C4 and D basic impact categories result of Bekron AC Paste (most representative product).

Basic impact categories	Unit	A1-A3	C1	C2	C3	C4	D
Climate change- total	kg CO <sub>2</sub> eq	5.46E+02	3.36E+00	1.90E+01	1.63E-01	9.01E+00	-1.34E-01
Climate change- Fossil	kg CO <sub>2</sub> eq	5.45E+02	3.36E+00	1.90E+01	1.63E-01	9.00E+00	-1.33E-01
Climate change- Biogenic	kg CO <sub>2</sub> eq	5.54E-01	2.21E-04	1.28E-03	1.07E-05	8.77E-04	-2.49E-04
Climate change - Land use and LU change	kg CO <sub>2</sub> eq	2.39E-01	1.37E-04	3.85E-04	6.67E-06	9.71E-03	-1.55E-04
Ozone depletion	kg CFC11 eq	1.32E-05	5.30E-08	4.24E-07	2.57E-09	1.40E-07	-1.21E-09
Acidification	mol H <sup>+</sup> eq	2.36E+00	3.22E-02	2.45E-02	1.56E-03	7.50E-02	-8.73E-04
Photochemical ozone formation	kg NMVOC eq	2.42E+00	2.88E-06	1.54E-05	1.40E-07	2.29E-05	-4.25E-06
Eutrophication, freshwater	kg P eq	8.77E-03	1.51E-02	6.02E-03	7.34E-04	3.43E-02	-2.82E-04
Eutrophication, marine	kg N eq	4.80E-01	1.64E-01	5.82E-02	7.98E-03	3.72E-01	-3.07E-03
Eutrophication, terrestrial	mol N eq	5.32E+00	4.84E-02	4.59E-02	2.35E-03	1.10E-01	-9.54E-04
Abiotic depletion potential - Fossils resources *	MJ, net calorific value	1.44E+04	4.42E+01	2.61E+02	2.15E+00	1.18E+02	-1.68E+00
Resource use, minerals and metals*	kg Sb eq	2.92E-04	1.41E-07	6.75E-07	6.86E-09	4.30E-07	-1.22E-08
Water (user) deprivation potential*	m <sup>3</sup> world eq. deprived	2.12E+02	5.67E-02	2.39E-01	2.75E-03	1.96E-01	-2.30E+00

\*Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

The use of the results of modules A1-A3 without considering the results of module C is not recommended

### 8.1.1. Global Warming Potential (GWP-GHG)

The life cycle result of the Bekron AC Paste (modules A1-A3, C1-C4 and D) evaluated with the IPCC GWP100 method is shown. The carbon footprint of 1000 kg of Bekron AC Paste for modules A1-A3 is 5.46E+02 kg CO<sub>2</sub> equivalent.

Table 9. Climate Impact (GWP-GHG) of Bekron AC Paste (most representative product).

Impact categories	Unit	A1-A3	C1	C2	C3	C4	D
GWP-GHG	kg CO <sub>2</sub> eq	5.46E+02	3.36E+00	1.90E+01	1.63E-01	9.01E+00	-1.34E-01

The indicator includes all greenhouse gases included in GWP-total but excludes absorption and emissions of biogenic carbon dioxide and biogenic carbon stored in the product. Therefore, this indicator is equal to the GWP indicator originally defined in the EN 15804+A2 method.

## 8.2. Use of resources

The parameters describing resource use were assessed using the Cumulative Energy Demand method version 1.09 (Frischknecht et al. 2007), except for the net freshwater use indicator, which was assessed using ReCiPe 2016 Midpoint (H) version 1.08 (Huijbregts et al. 2017). A detailed description of resource use is provided in Table 10.

Table 10. A1-A3, C1-C4 and D use of resources parameters.

Use of resources parameters	Unit	A1-A3	C1	C2	C3	C4	D
Use of renewable primary energy excluding renewable primary energy resources used as feedstock (PERE)	MJ	1.35E+02	8.62E-02	6.86E-01	0.00E+00	0.00E+00	-1.18E-01
Use of renewable primary energy as raw material (PERM)	MJ	4.69E+01	0.00E+00	0.00E+00	-8.17E-02	0.00E+00	0.00E+00
Total use of renewable primary energy (primary energy and primary energy resources used as feedstock) (PERT)	MJ	1.81E+02	8.62E-02	6.86E-01	-8.17E-02	0.00E+00	-1.18E-01
Non-renewable primary energy use excluding renewable primary energy resources used as feedstock (PENRE)	MJ	1.16E+04	4.70E+01	2.78E+02	0.00E+00	0.00E+00	-1.79E+00
Use of non-renewable primary energy as raw material (PENRM)	MJ	4.04E+03	0.00E+00	0.00E+00	-1.36E+00	0.00E+00	0.00E+00
Total use of non-renewable primary energy (primary energy and primary energy resources used as raw materials) (PENRT)	MJ	1.56E+04	4.70E+01	2.78E+02	-1.36E+00	0.00E+00	-1.79E+00
Use of secondary materials (SM)	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of secondary renewable fuels (RSF)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of secondary non-renewable fuels (NRSF)	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Use of fresh water (FW)	m <sup>3</sup>	5.30E+00	2.20E-03	1.09E-02	1.07E-04	1.03E-02	-5.39E-02

These energy parameters are assessed using the Cumulated Energy Demand method version 1.09 (Frischknecht Rolf, 2007) and adjusted with option B of Annex 3 of PCR 2019:14 Construction products, Version 1.3.4 published on April 30, 2024 (PCR, 2024). Water use was assessed using ReCiPe 2016 Midpoint (H) version 1.08 (Huijbregts et al., 2017).

## 8.3. Waste categories and output flows

Environmental indicators describing waste generation were obtained from the LCI, except for the background information which was calculated using the EDIP 2003 method (Hauschild and Potting, 2005). Environmental parameters describing waste generation and parameters describing output flows because of the LCA are provided below in Tables 11 and 12 respectively.



Table 11. A1-A3, C1-C4 and D waste indicators

Output parameter	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste	kg	2.81E-02	2.96E-04	1.72E-03	1.44E-05	7.76E-04	-5.72E-06
Non-hazardous waste	kg	1.02E+01	3.28E-03	1.29E-02	1.59E-04	9.59E+02	-3.75E-03
Radioactive waste*	kg	2.60E-03	2.15E-06	2.24E-05	1.05E-07	7.85E-06	2.61E-06

Environmental information describing waste categories and output flows is calculated using the EDIP 2003 method (Hauschild and Potting, 2005).

\*No radioactive waste is produced during Aislantes Nacionales SPA operations.

Table 12. A1-A3, C1-C4 and D output flow indicators

Output parameter	Unit	A1-A3	C1	C2	C3	C4	D
Components for reuse	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for recycling*	kg	0.00E+00	0.00E+00	0.00E+00	4.00E+01	0.00E+00	0.00E+00
Materials for energy recovery	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported electrical energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported thermal energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins, and/or risks

## 8.4. Variation on the environmental performance indicators

Below is the variation of the main indicators in A-C compared to the most representative product (R), Bekron AC Paste, which constitutes 87% of the total production of the Bekron paste family.

Table 13. Variation of environmental performance indicators, modules A-C

Basic impact categories	Unit	Bekron AC (R)	Bekron AD	Bekron Alfombra	Bekron Vinílico
GWP-GHG	kg CO <sub>2</sub> eq	5.77E+02	19.8%	216.8%	291.9%
Climate change- total	kg CO <sub>2</sub> eq	5.77E+02	19.8%	216.8%	291.9%
Climate change- Fossil	kg CO <sub>2</sub> eq	5.77E+02	19.7%	213.5%	288.5%
Climate change- Biogenic	kg CO <sub>2</sub> eq	5.56E-01	67.3%	954.8%	1237.6%
Climate change - Land use and LU change	kg CO <sub>2</sub> eq	2.50E-01	33.2%	6102.7%	6121.3%
Ozone depletion	kg CFC11 eq	1.39E-05	-43.6%	431.8%	1137.2%
Acidification	mol H <sup>+</sup> eq	2.49E+00	22.5%	332.1%	390.1%
Photochemical ozone formation	kg NMVOC eq	2.63E+00	6.3%	152.8%	302.5%
Eutrophication, freshwater	kg P eq	8.81E-03	38.0%	493.8%	515.9%
Eutrophication, marine	kg N eq	5.36E-01	16.4%	207.7%	278.9%
Eutrophication, terrestrial	mol N eq	5.92E+00	17.0%	222.3%	293.4%
Abiotic depletion potential - Fossils resources *	MJ, net calorific value	1.48E+04	9.1%	111.6%	366.4%
Resource use, minerals and metals*	kg Sb eq	2.93E-04	193.0%	4105.9%	4113.8%
Water (user) deprivation potential*	m3 world eq. deprived	2.13E+02	48.7%	547.1%	558.4%

\*Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

## 9. Certifications

During its over 35 years of presence in the country, Henkel Chile has been evolving and renewing its technologies to adapt to the needs of the local and regional markets. It has done so with a deep focus on its customers and consumers, taking actions to achieve better service, satisfaction, quality, and safety. Among them, the elimination of toluene from all its adhesives and its replacement with cyclohexane stands out.

### Environment

#### ISO 14001:2015 – Environmental Management Systems

International standard establishes a framework for managing the environmental impact of organizations, promoting sustainability and compliance with environmental regulations.



### Quality

#### ISO 9001:2015 - Quality management systems

Global standard for quality management systems, focused on meeting customer expectations and optimizing processes to ensure consistent, high-level products and services.



### Safety

#### ISO 45001:2018 - Occupational health and safety management systems

Standard that provides guidelines for creating safe and healthy work environments, reducing occupational risks and promoting the prevention of accidents and occupational diseases.



## 10. Contact information

### EPD Owner



Aislantes Nacionales SPA

Planta Senador Jaime Guzmán  
220 Comuna de Quilicura  
Santiago Chile, Chile  
[www.henkel.cl/](http://www.henkel.cl/)

Contact person:  
Massimo Collotta  
[massimo.collotta@henkel.com](mailto:massimo.collotta@henkel.com)

### LCA Author



Center for Life Cycle  
Assessment and Sustainable  
Design – CADIS

Bosques De Bohemia 2 No. 9,  
Bosques del Lago.  
Cuautitlan Izcalli,  
Estado de México, México.  
C.P. 54766  
[www.centroacv.mx](http://www.centroacv.mx)

LCA Study: Life Cycle  
Assessment (LCA) Bekron  
Cementitious Adhesives

LCA Authors: Solano, A;  
Sanchez, F and González, M.

Contact person:  
Juan Pablo Chargoy  
[jpchargoy@centroacv.mx](mailto:jpchargoy@centroacv.mx)

### Programme operator



EPD International AB

Box 210 60, SE-100 31,  
Stockholm, Sweden.  
[www.environdec.com](http://www.environdec.com)  
[info@environdec.com](mailto:info@environdec.com)

EPD registered through the  
fully aligned regional  
programme/hub:



Chile:  
Alonso de Ercilla 2996,  
Ñuñoa, Santiago Chile.

México:  
Bosques De Bohemia 2 No.9,  
Bosques del Lago.  
Cuautitlán Izcalli, Estado de  
México, México.  
C.P. 54766

## 11. References

- 2025, C. (n.d.). Retrieved from <https://construye2025.cl/2022/01/11/plan-de-gestion-de-residuos-mop-y-apl-valparaiso/>
- Aislantes Nacionales SPA. (2023). Information provided by the technical team.
- BIEE. (2023). Base de Indicadores de Eficiencia Energética de México. Retrieved from <https://www.biee-conuee.net/site/index.php>
- Concretos Reciclados. (2021). Recycled Concrete Website. Retrieved from <http://www.concretosreciclados.com.mx>
- Conde, O. M. (2012). Presente Futuro de la Industria del Plástico en México. D.F.: Centro Empresarial del Plástico.
- EN 15804:2012+A2:2019/AC:2021 (Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products).
- Econinvent 3.9. (2022). Database.
- EPD. (2021). EPD System. Retrieved from <https://www.environdec.com/home>
- Goedkoop, M., Oele, M., Schryver, A., & Vieira, M. (2008). SimaPro Database Manual. Methods Library. Retrieved mayo 2, 2011, from <http://www.pre.nl/content/manuals>
- Henkel Cl. (n.d.). Henkel. Retrieved from <https://www.henkel.cl/compania>
- IMNC (2008) NMX-SAA-14040 Gestión ambiental - Análisis de ciclo de vida - Principios y marco de referencia. México, D.F.: IMNC.
- IMNC (2008) NMX-SAA-14044 Gestión ambiental - Análisis de ciclo de vida - Requisitos y directrices. México, D.F.: IMNC
- ISO 14020:2022. Environmental statements and programmes for products — Principles and general requirements.
- ISO 14025: 2006. Environmental labels and declarations— Type III environmental declarations — Principles and procedures.
- GPI 4.0 (2021). General Programme Instructions. International EPD System.
- PCR 2019:14 Construction Products V 1.3.4. (2024-04-30). EPD System. Available on <https://www.environdec.com/>
- Pontificia Universidad Javeriana, Facultad de Ingeniería. (2014). ANÁLISIS TÉCNICO Y ECONOMICO PARA EL USO DE ALTERNATIVAS DE DEMOLICIÓN EN EL EDIFICIO No. 19 JOSÉ CELESTINO ANDRADE DE LA PUJ. Bogotá, Colombia: Maya Rojas, O.
- PRé Consultants. (2010). Data base manual. Methods library. Retrieved abril 20, 2010, from <http://www.pre.nl/download/manuals/DatabaseManualMethods.pdf>
- UN (2015) Central Product Classification (CPC) Version Statistics Division. United Nations, New York.

## RESERVED RIGHTS

publications of construction practices. Reserved rights: the content of this document may not be reproduced or used in whole or in part in any form, electronically, photocopy or otherwise without the permission of Henkel.

[www.henkel.cl](http://www.henkel.cl)