

WELDING ISSUES ELIMINATED WITH LOCTITE® STRUCTURAL ADHESIVE



SITUATION

A work truck and trailer business wanted to improve their assembly process by eliminating manual welding. They needed a fast solution that is high strength, impact resistant and environmental durable.


LOCTITE® SOLUTION

The LOCTITE Technical Sale Engineer recommended LOCTITE® AA H8006™ as a weld replacement structural adhesive. The recommendation was tested and the results used to develop a 'best practice' assembly guidelines. The guidelines and some training were all that was needed for general laborers to make high performance assemblies. Further collaboration with the manufacturer identified an additional process improvement opportunity to use TEROSON® MS 939 NA to secure and seal fiberglass to ABS.



BENEFITS

Using LOCTITE® AA H8006™ and TEROSON® MS 939 NA™ in this situation provided the customer a fast and reliable solution. LOCTITE® AA H8006™ delivered weld-like structural performance and durability and eliminated weld related issues of safety, training and finding/keeping qualified personnel. These adhesives reduced costs and improved the assembly process.

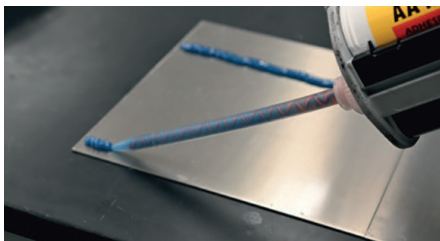

Product	Size	IDH
LOCTITE® AA H8006™	490 ml	2340592
TEROSON® MS 939 NA™ BLACK	290 ml	2068378
TEROSON® MS 939 NA™ GREY	290 ml	2069400
TEROSON® MS 939 NA™ WHITE	290 ml	2069997

***Representative images used to maintain customer confidentiality.**

All marks used are trademarks and/or registered trademarks of Henkel and its affiliates in the U.S. and elsewhere. ® = registered in the U.S. Patent and Trademark Office.
© 2025 Henkel. All rights reserved. DSGN0046671 (09/25)