



BERGQUIST® GAP FILLER TGF 2100LVO

Next Generation, 2-component, low volatile outgassing silicone-based gap filler



CUSTOMER NEEDS

- **Global footprint** and global product safety standards
- **High reliability** under severe thermal load
- **Excellent dispensing** properties
- Low **siloxane outgassing**



HENKEL SOLUTIONS

- Low abrasion
- **Fast** and **robust** dispensing
- **Low volatile silicone** technology
- **Balanced mechanical** properties
- Improved product **stability** over **shelf life**
- **Short cure** with extended working time at room temperature
- **Globally available** and follows global product safety standards

CONTACT US TO LEARN MORE

Europe
Germany
Henkel AG & Co. KGaA (Headquarters)
Henkelstraße 67
40589 Düsseldorf
Phone: +49 211 797-0

Asia-Pacific
China
Henkel (China) Investment Co., Ltd.
Building 7 & Building 6 (5F-6F)
The Springs Center
No.99 Jiang Wan Cheng Road
Yang Pu District, Shanghai 200438
Phone: +86 21 2891 8000

America
USA
Henkel Corporation
Madison Heights 32100 Stephenson
Highway
Madison Heights, MI 48071
Phone: +1 248 583 9300



Henkel Adhesive Technologies




GLOBALLY
AVAILABLE

NEXT GEN
GAP FILLERS



ELECTRONIC CONTROL UNITS

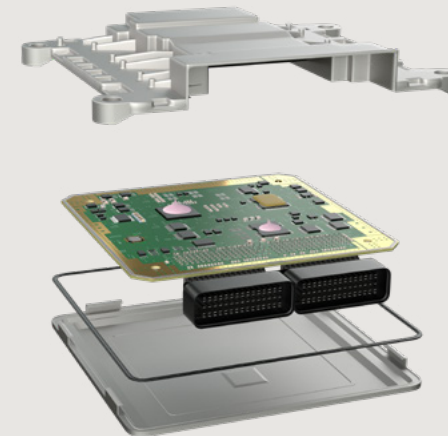

“Excellent dispensing properties for automated equipment and controlled volatile outgassing silicones for sensitive applications”

www.henkel-adhesives.com

The information provided herein, especially recommendations for the usage and the application of our products, is based upon our knowledge and experience. Due to different materials used as well as to varying working conditions beyond our control we strictly recommend to carry out intensive trials to test the suitability of our products with regard to the required processes and applications. We do not accept any liability with regard to the above information or with regard to any verbal recommendation, except for cases where we are liable of gross negligence or false intention. The information is protected by copyright. In particular, any reproductions, adaptations, translations, storage and processing in other media, including storage or processing by electronic means, enjoy copyright protection. Any exploitation in whole or in part thereof shall require the prior written consent of Henkel AG & Co. KGaA. Except as otherwise noted, all marks used in this document are trademarks and/or registered trademarks of Henkel and/or its affiliates in the US, Germany, and elsewhere. © Henkel AG & Co. KGaA, 2025