

**LOCTITE®**



# LOCTITE® 3D IND6845™

Tough  
Matte Black

**LOCTITE®**  
Henkel Corporation  
[loctite3d@henkel.com](mailto:loctite3d@henkel.com)





**IND6845™**  
TOUGH



## LOCTITE 3D IND6845™

LOCTITE 3D IND6845 offers a solid balance of moderately high Heat Deflection Temperature (HDT) and toughness.

LOCTITE 3D IND6845 produces parts with smooth surfaces and fine details. In addition to its toughness, it has excellent impact resistance making it suitable for parts that are subject to wear and mechanical stress.

LOCTITE 3D IND6845 is TPO-free which contributes to better safety ratings in manufacturing environments.



### Benefits:

- TPO-free and excellent H&S rating
- Unique balance of HDT and toughness
- Increased print speed



### Ideal for:

- General industrial applications
- General end-use plastic parts
- Jigs, tooling, fixtures



### Markets:




Industry



Automotive



Consumer Goods

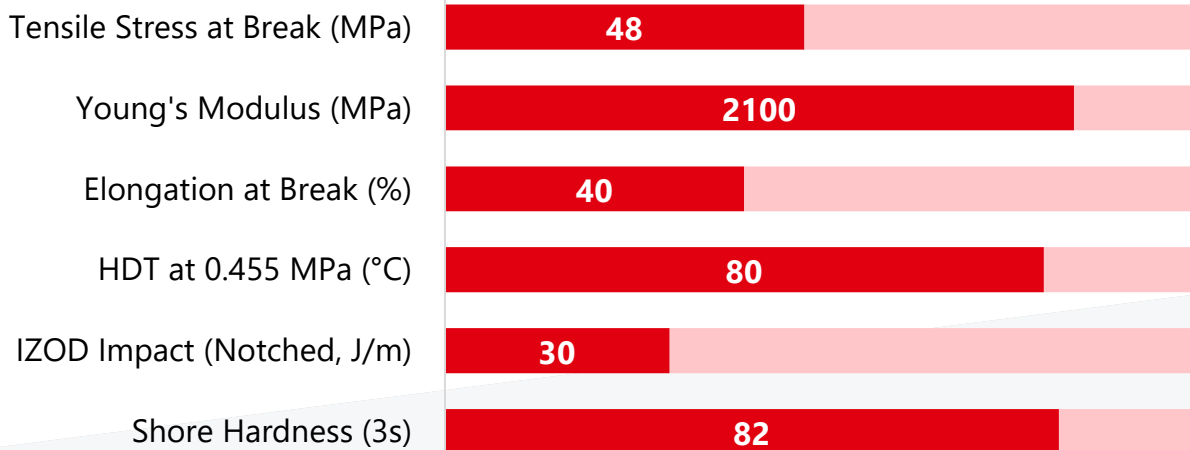

*\*Values shown are linked to LOCTITE IND6845 BK as reference.*





**IND6845™**  
TOUGH  
BLACK



## PROPERTIES

Mechanical Properties	Measure	Method	Green	Post Processed
Young's Modulus	MPa	ASTM D638	1680 – 1830 <sup>[1]</sup>	1980 - 2200 <sup>[1]</sup>
Tensile Stress at Yield	MPa	ASTM D638	41 – 43 <sup>[1]</sup>	55 - 59 <sup>[1]</sup>
Elongation at Yield	%	ASTM D638	4.1 – 4.6 <sup>[1]</sup>	4.4 – 5.6 <sup>[1]</sup>
Tensile Stress at Break	MPa	ASTM D638	32 – 34 <sup>[1]</sup>	47 – 49 <sup>[1]</sup>
Elongation at Break	%	ASTM D638	56 – 64 <sup>[1]</sup>	35 – 45 <sup>[1]</sup>
Flexural Modulus	MPa	ASTM D790	-	1960 – 2300 <sup>[15]</sup>
Flexural Stress at Break	MPa	ASTM D790	-	80 – 95 <sup>[15]</sup>
Flexural Elongation at Break	%	ASTM D790	-	≥5 <sup>[15]</sup>
IZOD Impact (Notched)	J/m	ASTM D256	-	28 – 35 <sup>[5]</sup>
Shore Hardness (3s)	D	ASTM D2240	-	76 – 78 <sup>[15]</sup>
<b>Other Properties</b>				
HDT at 0.455 MPa	°C	ASTM D648	-	80 – 85 <sup>[3,4]</sup>
HDT at 1.82 MPa	°C	ASTM D648	-	62 – 68 <sup>[3,4]</sup>
Water Absorption (24hr)	%	ASTM D570	-	2.1 – 2.5 <sup>[2]</sup>
Water Absorption (48hr)	%	ASTM D570	-	2.7 – 3.1 <sup>[2]</sup>
Water Absorption (72hr)	%	ASTM D570	-	3.3 – 3.7 <sup>[2]</sup>
Solid Density	g/cm <sup>3</sup>	ASTM D1475	-	1.16 - 1.20 <sup>[2]</sup>
Thermal Conductivity	W/(m·K)	ASTM D5930	-	0.20 – 0.21 <sup>[12]</sup>
Heat Capacity	J/(g·K)	ASTM D5930	-	1.2 – 1.3 <sup>[12]</sup>
Horizontal Burning Test	-	UL94	-	HB at 1.6 mm <sup>[13]</sup>

**Test parameters:**

"All specimen are printed unless otherwise noted. All specimen were conditioned in ambient lab conditions at 19-23°C / 40-60% RH for at least 24 hours." ASTM Methods: D638 Type IV, 5 mm/min, D790-B, 1.3 mm/min, D648, D256 Notched IZOD (Machine Notched), 6 mm x 12 mm, D570 0.125" x 2" Disc 24hr@ 25°C, D2240, Type "D" (0, 3 seconds), D7867, D1475

\*The biological assessment has been performed based on the in vitro method according to ISO10993-23

**Internal Data Sources:**

[1] GEN730945 [2] FOR727326, [3] FOR716969, [4] FOR727226, [5] FOR729752, [12] FOR729029 [13] FOR728833, [15] FOR779087





**IND6845™**  
TOUGH  
BLACK



## PROPERTIES

Liquid Properties	Measure	Method	Value
Viscosity at 25°C (77°F)	cP	ASTM D7867	650 – 850 [7]
Liquid Density	g/cm <sup>3</sup>	ASTM D1475	1.07 [8]
<b>Biocompatibility</b>			
Cytotoxicity		ISO10993-5	- Comply [14]

Electrical Properties	Measure	Method	Green	Post Processed
Volume Resistivity	Ω·cm	ASTM D257	-	5.1·10 <sup>15</sup> – 3.7·10 <sup>15</sup> [10]
Surface Resistivity	Ω	ASTM D257	-	9.9·10 <sup>15</sup> – 8.1·10 <sup>15</sup> [10]
Dielectric Strength	kV/mm	ASTM D149	-	14.4 – 13.8 <sup>[16]</sup>
AC Relative Permittivity (Dielectric Constant)				
at 50 Hz (XY)	none	ASTM D150	-	4.0 - 5.1 <sup>[16]</sup>
at 1 kHz (XY)	none	ASTM D150	-	4.2 – 4.8 <sup>[16]</sup>
at 1 MHz (XY)	none	ASTM D150	-	3.8 - 4.3 <sup>[16]</sup>
AC Loss Characteristic (Dissipation Factor)				
at 50 Hz (XY)	none	ASTM D150	-	0.11 – 0.29 <sup>[16]</sup>
at 1 kHz (XY)	none	ASTM D150	-	0.08 – 0.10 <sup>[16]</sup>
at 1 MHz (XY)	none	ASTM D150	-	0.13 – 0.17 <sup>[16]</sup>

\*All specimen are printed unless otherwise noted. All specimen were conditioned in ambient lab conditions at 19-23°C / 40-60% RH for at least 24 hours.\* ASTM Methods: D638 Type IV, 5 mm/min, D790-B, 2 mm/min, D648, D256 Notched IZOD (Machine Notched), 6 mm x 12 mm, D570 0.125" x 2" Disc 24hr@ 25°C, D2240, Type "D" (0, 3 seconds), D7867, D1475

Internal Data Sources:

[7] FOR724418, [8] GEN79320Z, [10] FOR728734, [14] FOR76495Z, [16] FOR74829Z





**IND6845™**  
TOUGH  
BLACK



## WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

## PRINTER SETTINGS

LOCTITE 3D IND6845 BK is formulated to print optimally on DLP and LCD printers. Read the safety data sheet carefully to get details about health and safety instructions. Recommended print parameters:

- Shake resin bottle well before usage
- Temperature: 20°C to 35°C
- Intensity: 1.5 mW/cm<sup>2</sup> to 5 mW/cm<sup>2</sup>

Printer Settings			385 nm and 5.0 mW/cm <sup>2</sup>	405 nm and 1.75 mW/cm <sup>2</sup>
Parameter	Measure	Method	Exposure time	Exposure time
Layer Thickness	µm	Internal	100	100
Burn-in Region	s	Internal	5	25
Transition Region	s	Internal	-	16
Model Region	s	Internal	5.5	8

Parameter	Measure	Method	Value	Value
E <sub>C</sub>	mJ/cm <sup>2</sup>	Internal	9.3 <sup>[11]</sup>	5.1 <sup>[12]</sup>
D <sub>p</sub>	mm	Internal	0.16 <sup>[11]</sup>	0.16 <sup>[12]</sup>

Settings	Measure	Method	Exposure time	Exposure time
D <sub>C</sub> = 50 µm	s	Internal	1.76 <sup>*[11]</sup>	3.6 <sup>*[12]</sup>
D <sub>C</sub> = 100 µm	s	Internal	2.80 <sup>*[11]</sup>	5.3 <sup>*[12]</sup>

**Test parameters:**

\*Exposure times are calculated without a safety factor

**Internal data source:**

[11] FOR723725, [12] FOR718034





**IND6845™**  
TOUGH  
BLACK



## WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

### CLEANING

LOCTITE 3D IND6845 BK requires post processing to achieve specified properties. Prior to post curing, support structures should be removed from the printed part, and the part should then be washed. Use compressed air to remove residual solvent from the surface of the material between intervals.

Post Process Step	Agent	Method	Duration	Intervals	Additional Info
Cleaning Step #1	Cleaner C	Ultrasonic	2 min	1 or 2	Dry after each interval
Cleaning Step #2	IPA	Ultrasonic	1 min	1	
Dry	n.a.	Compressed air	10 s to 60 s	1	Air pressure (50psi)
Wait before post curing	n.a.	Ambient condition	60 min	1	Room temperature

### POST CURING

LOCTITE 3D IND6845 BK requires a two-step post curing to achieve specified properties. In the first step it is recommended that either an LED or wide spectrum lamp be used to UV post cure parts. In the second step the UV post cured parts require an additional Heat post cure to achieve final properties.

#### STEP 1: UV post cure

UV Curing Unit	UV Source	Intensity	Cure time per side	Additional Settings (Shelf, Output Energy)
Loctite CL36	405nm LED	80 mW/cm <sup>2</sup> at 405 nm	30 min	100% top and side
Prusa CW1S	405nm LED	15 mW/cm <sup>2</sup> at 405 nm	30 min	100%





**IND6845™**  
TOUGH  
BLACK



## WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

## POST CURING


LOCTITE 3D IND6845 BK requires a two-step post curing to achieve specified properties.

### STEP 2: Heat post cure – Using a printer at 405 nm

After UV post curing, an additional Heat post cure at 80°C for 1 hours is required to reach final properties. Let parts rest one hour between UV post cure and Heat post cure.

To minimize risk of warpage place parts in the oven at standard lab conditions with  $T_{\text{start}} = 22^{\circ}\text{C}$  before ramping temperature with are rate of  $R_T \leq 5^{\circ}\text{C}/\text{min}$  to target value of  $T_{\text{cure}} = 80^{\circ}\text{C}$ .

After 1 hour at  $T_{\text{cure}} = 80^{\circ}\text{C}$  cool down parts slowly in the switched off oven to standard lab conditions with  $T_{\text{end}} = 22^{\circ}\text{C}$ . Do not remove the parts from the oven before they reached lab temperature to prevent thermal stress and warpage.

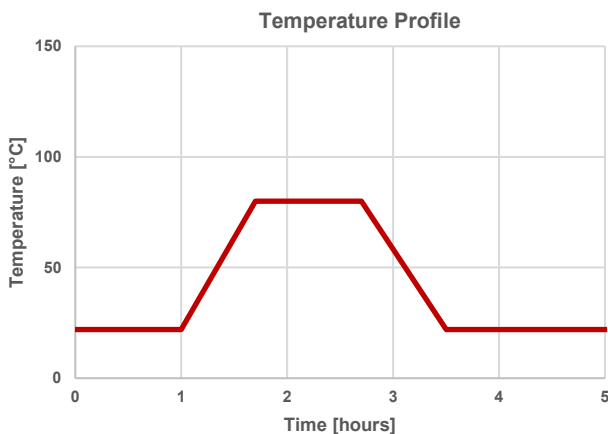

# LOCTITE®

**IND6845™**  
TOUGH  
BLACK



## TIPS & TRICKS

This section is a collection of useful advices, guides, and recommendations designed to help users of **LOCTITE 3D IND6845 BK** deal with specific process tasks more efficiently.

### STORAGE

Store **LOCTITE 3D IND6845 BK** in the unopened container in a dry location. Optimal Storage: 20°C to 30°C. Storage below 20°C or above 30°C can adversely affect product properties. .

### RESIN USE

Use **LOCTITE 3D IND6845 BK** within two weeks after having opened the bottle to assure stable mechanical properties. Material removed from containers may be contaminated during use. For this reason, filter used resin with 190 µm mesh filter before placing back into proper storage container. Please use a separate container for used resin.

Reduce exposure to ambient light to achieve best resin performance.

### POST PROCESSING

Please start the post processing of **LOCTITE 3D IND6845 BK** within 24 hours after the print is finished. Gently remove green parts from the platform to achieve best part performance.








**IND6845™**  
TOUGH  
BLACK




### THERMAL INFLUENCE ON MECHANICAL PROPERTIES

LOCTITE 3D IND6845 BK was tested according to ASTM D638 at varied environmental temperatures, from -40°C to 100°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638. Before each test series samples were conditioned for 60 minutes at the specific test temperature.


Young's Modulus at -40°C to 100 °C

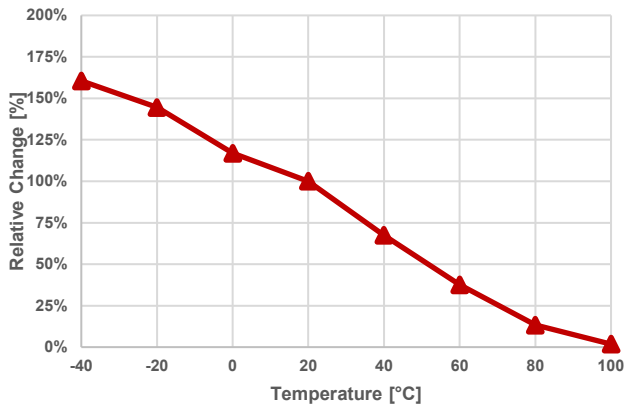


Elongation at Break at -40°C to 100 °C

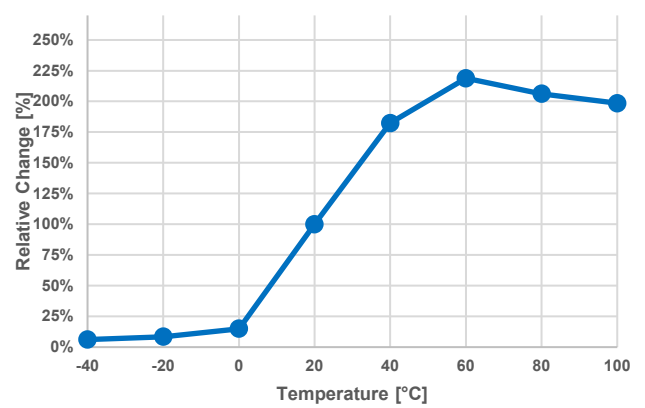

Stress at Break at -40°C to 100 °C

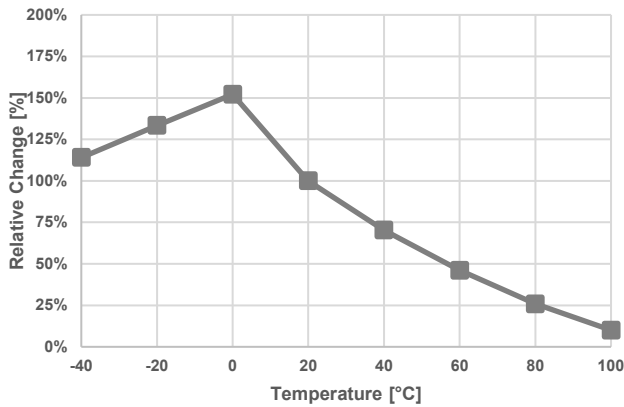

Stress at Yield at -40°C to 100 °C

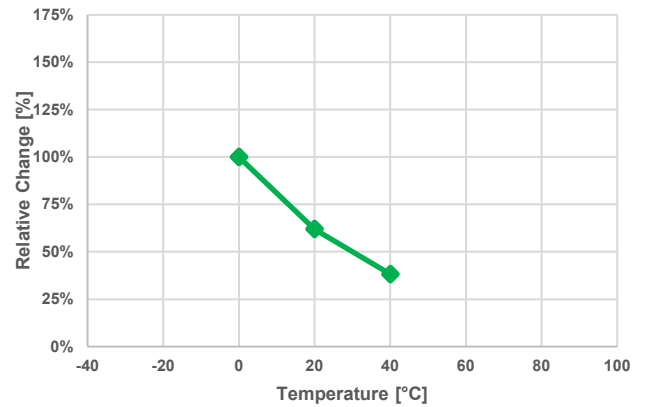

Test parameters:  
ASTM D638, Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1% (regression)





Internal Data Sources:  
[1] FOR739355





### AGEING AND ENVIRONMENTAL EFFECTS – CHEMICAL RESISTANCE INDUSTRIAL

LOCTITE 3D IND6845 BK was tested after chemical ageing according to ASTM D543. The influence of chemicals was tested by measuring mechanical properties after different test times (Immersion test for 24 and 168 hours). Exposed samples were stored in containers and fully immersed in different chemicals. Samples were stirred every 24 hours using a shaker. After removal, exposed samples were washed and conditioned for 24 hours at 22°C before mechanical testing. All samples were printed using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C). The 100% value represents the initial weight 24 hours after post-processing.

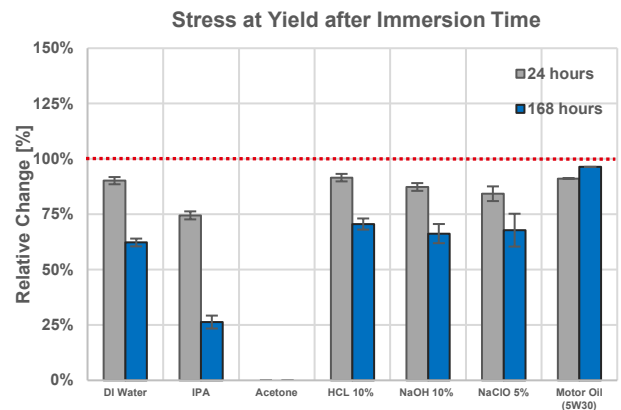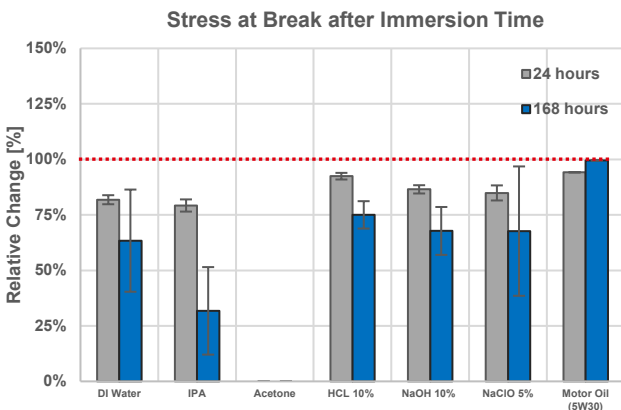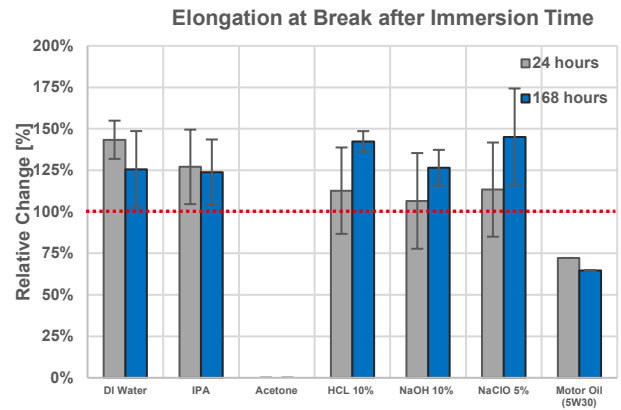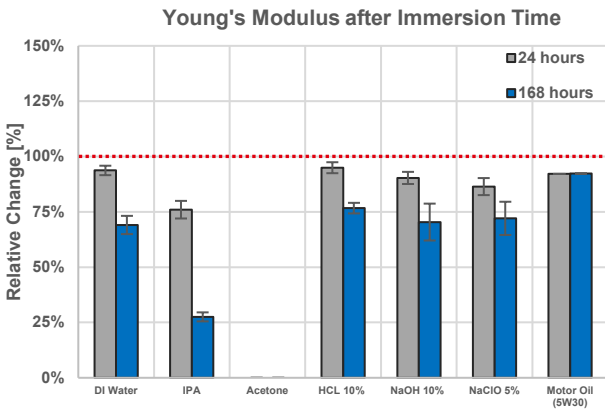

**Test parameters:**  
 ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C  
 ASTM D543: Samples immersed in different chemicals were stored at 22°C. Samples immersed in Motor Oil were stored at 50°C.  
 Properties of media used: pH(HCl 10%) = 1; pH(NaOH 10%) = 14; pH(NaClO 5%) = 13

**Internal Data Sources:**  
[FOR730344](#), [FOR730345](#), [FOR730349](#), [FOR730353](#), [FOR752206](#), [FOR752207](#), [FOR752209](#)






**IND6845™**  
TOUGH  
BLACK



### AGEING AND ENVIRONMENTAL EFFECTS – CHEMICAL RESISTANCE MASS SOAK

LOCTITE 3D IND6845 BK was tested after chemical ageing according to ASTM D543. The influence of chemicals was tested by measuring the mass change after different test times (Immersion test for 24 and 168 hours). Exposed samples were stored in containers and fully immersed in different chemicals. Samples were stirred every 24 hours using a shaker. After removal exposed samples were washed, dried and immediately weighed. All samples were printed using a validated workflow.

The 100% value represents the initial weight 24 hours after post-processing.

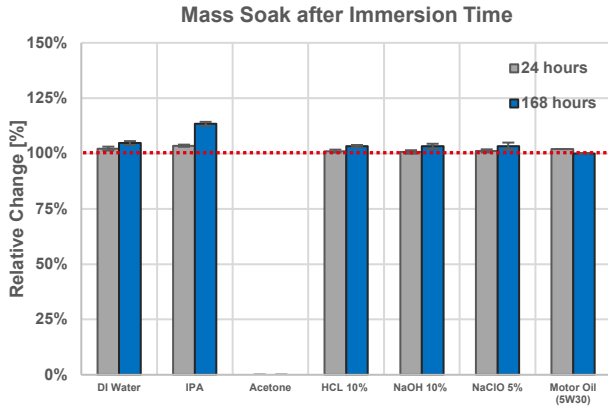

**Test parameters:**

ASTM D543: Samples immersed in different chemicals were stored at 22°C. Samples immersed in Motor Oil, Transmission Oil and Coolant mix 1:1 were stored at 50°C.  
Properties of media used: pH(HCl, 10%) = 1; pH(NaOH 10%) = 14; pH(NaClO 5%) = 13; pH(H<sub>2</sub>SO<sub>4</sub> 30%) = 0; pH(H<sub>2</sub>O<sub>2</sub> 30%) = 5; pH (NaCl solution 0.9%) = 5  
Viscosity: Hydraulic fluid = 3000 mPas at 40°C; Transmission oil = 8200 mPas at 40°C;  
Minimum temperature for coolant mix 1:1 = -40°C

**Internal Data Sources:**

[FOR730344](#), [FOR730345](#), [FOR730349](#), [FOR730353](#), [FOR752206](#), [FOR752207](#), [FOR752209](#)





**IND6845™**  
TOUGH



## NOTE

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:**

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

**In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:**

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

**In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada, Inc. the following disclaimer is applicable:**

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of **Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

### Trademark Usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.



**LOCTITE®**



**FIND OUT MORE AT**  
**LOCTITEAM.COM**

**LOCTITE®**  
Henkel Corporation  
[loctite3d@henkel.com](mailto:loctite3d@henkel.com)

