


**LOCTITE®**

**3D PRINTING**

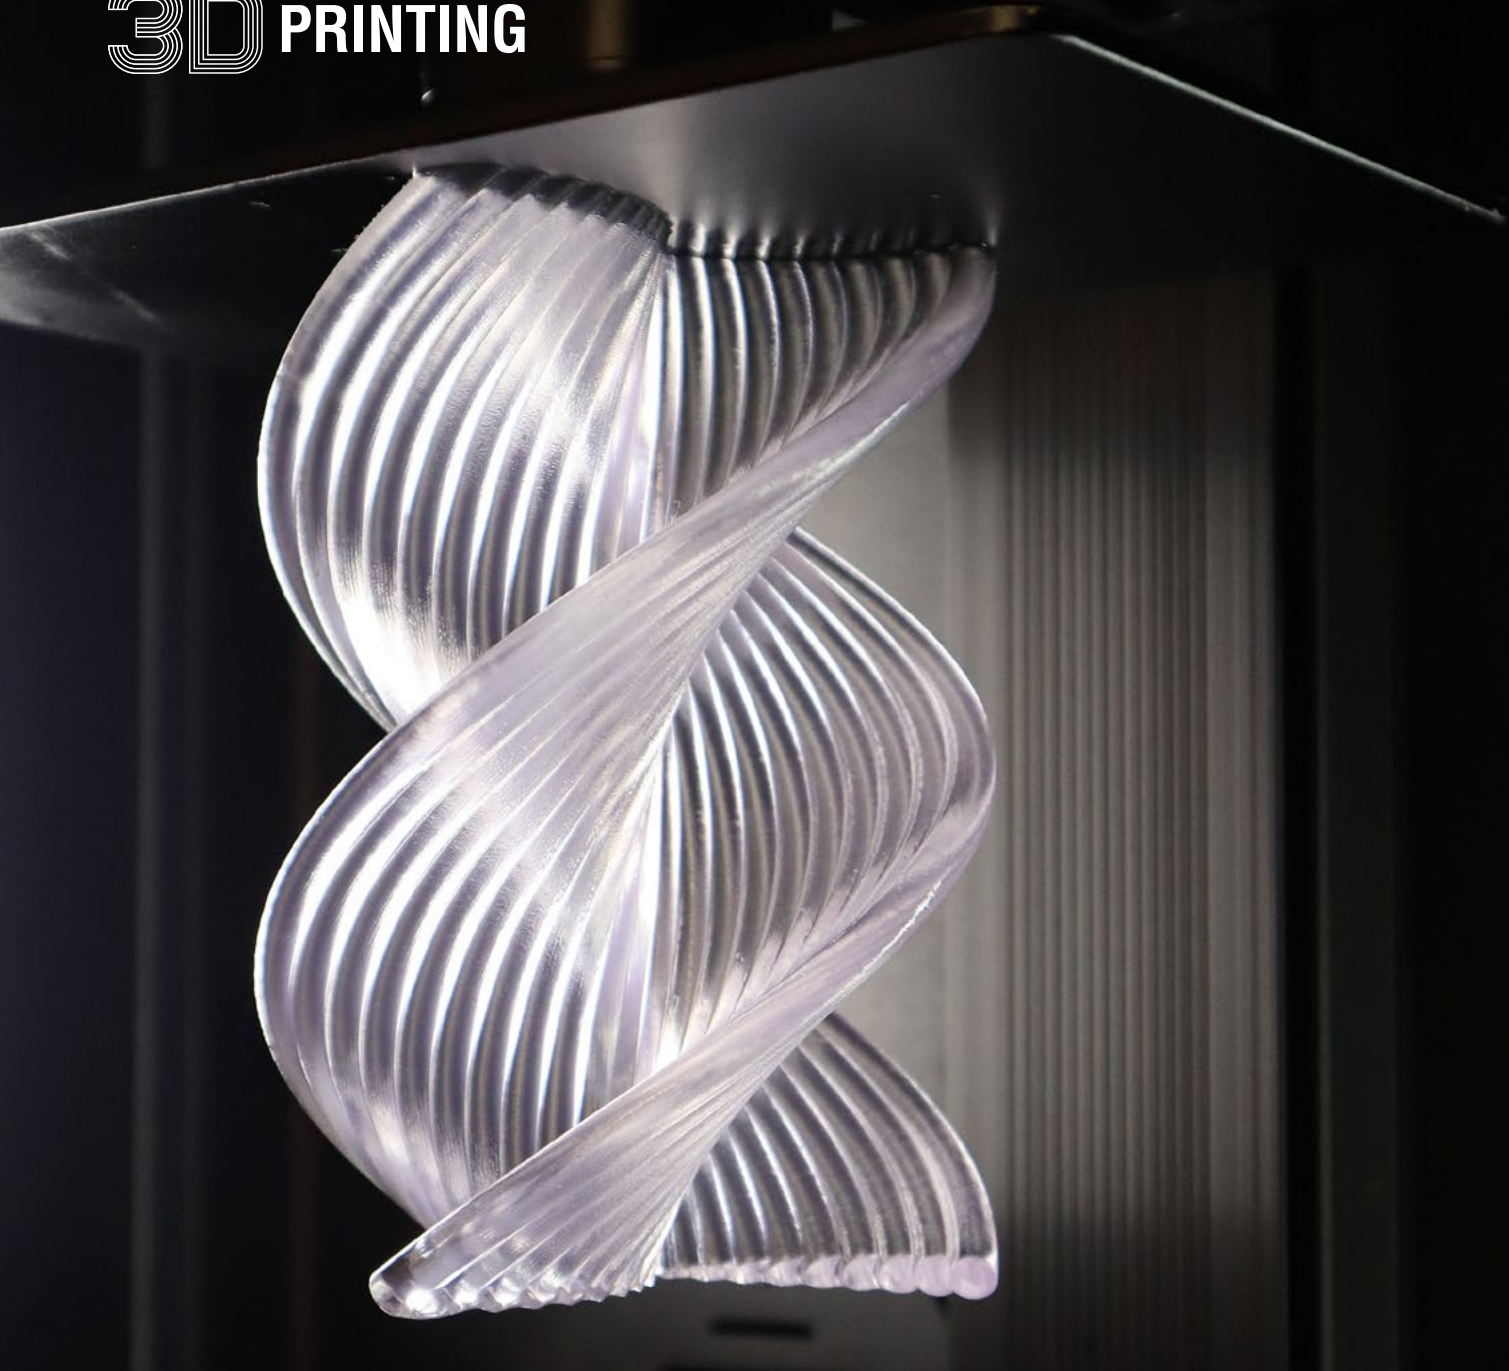

---

# **OUR 3D PRINTING MATERIAL SOLUTIONS**

**WE MAKE ADDITIVE MANUFACTURING HAPPEN**



Henkel Adhesive Technologies



**LOCTITE**

# Introduction

LOCTITE materials have always been on the forefront of Industrial assembly and manufacturing.


As industry further embraces Additive Manufacturing as a production solution, Henkel is again at the forefront with a broad portfolio of photopolymer resins. Covering tough, specialty, high temperature resistant, elastomer, prototyping, and medical resins, the LOCTITE 3D portfolio supports a wide range of industries, applications, and use cases.

LOCTITE 3D Photopolymer materials have been validated for use on an extensive range of printers giving customers the ability to select a production solution that fits their needs. Among others, our workflow validations and extensive material testing to ASTM standards put LOCTITE in a leading position in open-source materials.

LOCTITE 3D materials are available globally, and with Henkel's legacy of business excellence, customers have the security of working with one of the world's largest industrial materials companies that is committed to bringing LOCTITE Additive Manufacturing solutions to industry.

For more information on material specifications and printer compatibility please visit [www.LoctiteAM.com](http://www.LoctiteAM.com)

## LOCTITE 3D Printing Resins for Industrial Applications

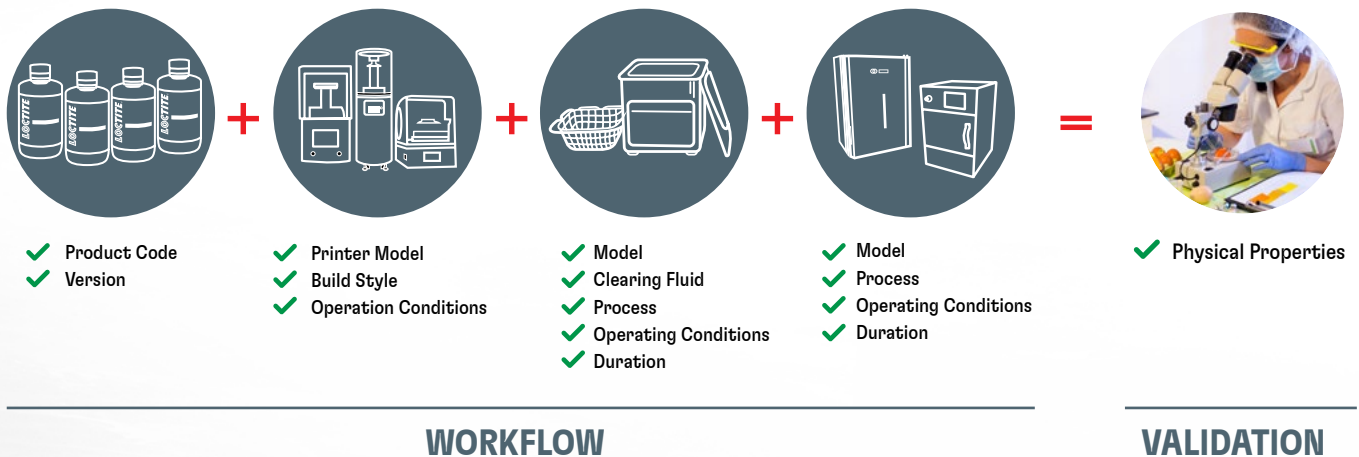

LOCTITE 3D Printing delivers high performance photopolymers with a validated workflow to ensure reproducible, repeatable results are generated in accordance with our Technical Data Sheet and test results. More workflow information can be found at [www.LoctiteAM.com/printer-validation-settings](http://www.LoctiteAM.com/printer-validation-settings).



# Why Digital Light Processing (DLP) or Liquid Crystal Display (LCD) is the right technology for you.

## DLP AND LCD PRINTING HAS NUMEROUS ADVANTAGES COMPARED TO OTHER ADDITIVE MANUFACTURING TECHNOLOGIES:

- High resolution and great surface finish
- Broad range of high-performance materials available from LOCTITE
- Faster printing speeds
- Excellent isotropic properties
- Less infrastructure costs, less maintenance and lower energy consumption
- Easy and convenient change over for managing multiple materials, with the same equipment

## How to Select the Right Material

### 1 PROCESS CONSIDERATION

- What technology are you using?  
Which DLP or LCD printer do you use?
- Part requirements including...
  - Size
  - Surface finish
  - Level of accuracy

### 2 END USE OF THE PART

- What is the current solution and what are the challenges?
- What is the application type and key industry?
- What is the reference material? (PP/ABS/rubber)
- What environments will the part be exposed to?
- Other considerations including temperature resistance, stiffness/elongation requirements, impact resistance and other physical properties

### 3 SPECIAL CONSIDERATIONS

- Fire, Smoke and Toxicity (FST)
- Medical certifications (skin contact, biocompatibility)
- Environmental durability (long-term aging resistance)
  - Chemical resistance
  - UV aging
  - Accelerated heat aging
  - Temperature cycling
- End-to-end cycle time
- Cost considerations

## APPLICATION EXAMPLE – THE RIGHT MATERIAL CHOICE

### *Adhesive Fixture for Bonding Assembly*

By leveraging LOCTITE 3D 3172 HDT High Impact and design optimization, it was possible to achieve the same functionality as previous designs with improved ergonomics while reducing material usage by 83%. Lead time was also significantly reduced from 2 weeks to just 5 hours production time with a 50% cost reduction.



#### STEP 1: PROCESS CONSIDERATION

- Based on the initial design, size, and quantity, 3D printing was identified as a more economical and quicker production method.
- A DLP printer was utilized to create a medium-sized part with a high surface finish and the requested precision.



#### STEP 2: END USE OF THE PART

- Instead of the initial use of aluminum, the final application for the part required a toughened material like Loctite 3D 3172.
- The fixture was required to apply adhesive in an assembly line, where the initial weight reduction proved beneficial for ease of handling.
- High stiffness and impact resistance were required due to direct handling by the operators.



#### STEP 3: SPECIAL CONSIDERATIONS


- By utilizing the Loctite 3D 3172, the designers were able to optimize the design and minimize the weight while maintaining the requested mechanical durability.
- The combination of Loctite 3D 3172 and design optimization enabled the customer to reduce lead time and material usage while ensuring a competitive cost compared to aluminum.

# A BROAD RANGE OF MATERIALS TO MEET YOUR INDUSTRIAL REQUIREMENTS ACROSS MULTIPLE APPLICATIONS


LEARN MORE ABOUT LOCTITE RESINS, CUSTOMIZED FOR DLP AND LCD PRODUCTION PROCESSES

## INDUSTRIAL PRODUCTION RESINS

### RIGID RESINS: COMPARISON OF HDT AND ELONGATION AT BREAK

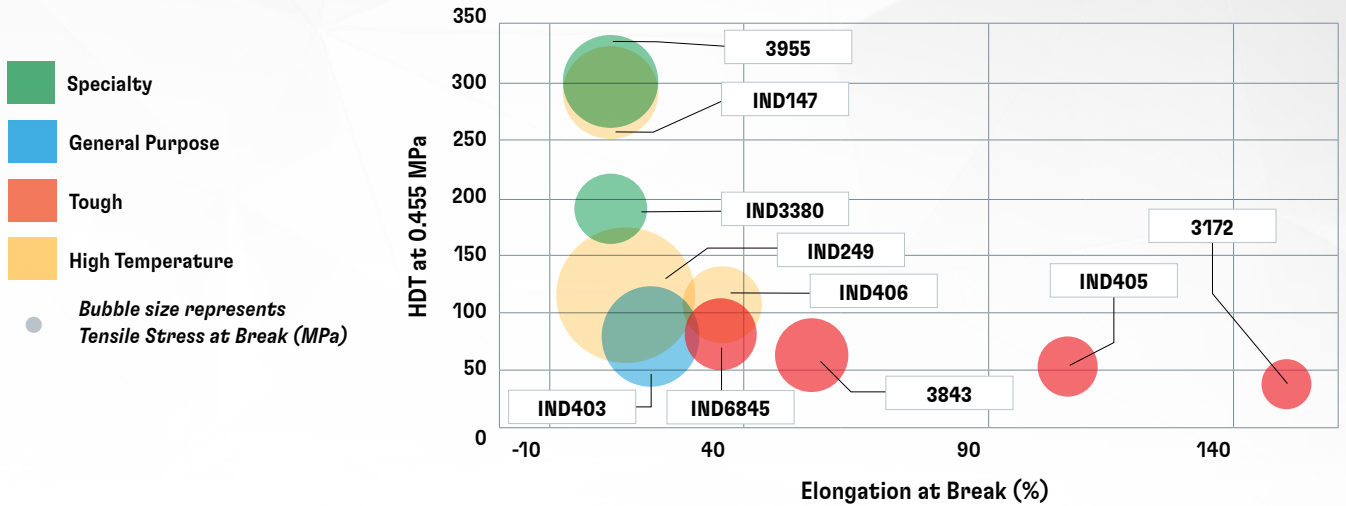


### ELASTOMER RESINS: COMPARISON OF SHORE A HARDNESS AND TEAR STRENGTH

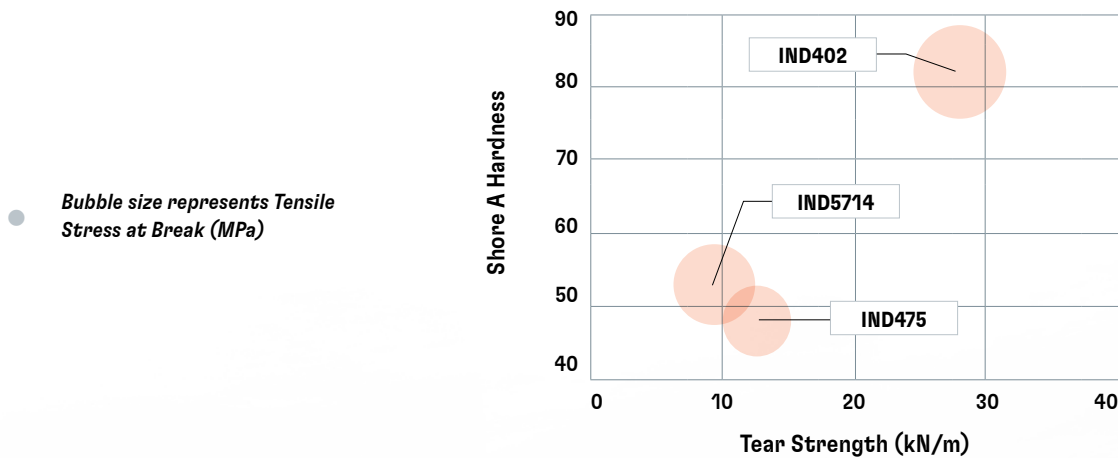

## PROTOTYPING & PRODUCTION RESIN

### RIGID RESINS: COMPARISON OF HDT AND ELONGATION AT BREAK

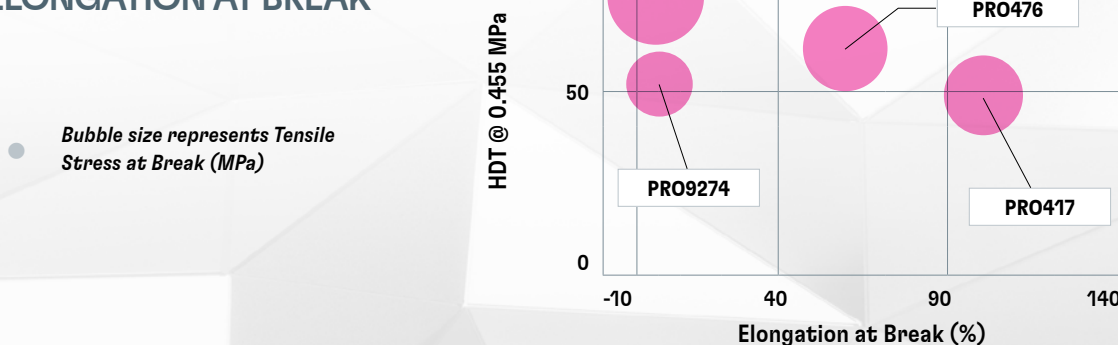

# LOCTITE 3DP Product Overview

|                         | Color       | HDT at 0.455 MPa (°C) | Tensile Stress at Break (MPa)  | Elongation at Break (%)        | Young's Modulus (MPa) | Flexular Modulus (MPa) | IZOD Impact Notched (J/m) | Shore Hardness (3 sec) |
|-------------------------|-------------|-----------------------|--------------------------------|--------------------------------|-----------------------|------------------------|---------------------------|------------------------|
|                         |             | ASTM D648             | ASTM D638 (D412 <sup>1</sup> ) | ASTM D638 (D412 <sup>1</sup> ) | ASTM D638             | ASTM D790              | ASTM D256                 | ASTM D2240             |
| <b>TOUGH</b>            |             |                       |                                |                                |                       |                        |                           |                        |
| 3172                    | Gray        | 52                    | 39                             | 100                            | 1,500                 | 1,100                  | 73                        | 63 D                   |
| 3843                    | Clear       | 63                    | 44                             | 41                             | 1,700                 | 1,900                  | 65                        | 63 D                   |
|                         | White       | 60                    | 49                             | 48                             | 1,700                 | 1,700                  | 58                        | 76 D                   |
|                         | Matte Black | 63                    | 51                             | 43                             | 1,800                 | 1,800                  | 53                        | 67 D                   |
| IND405                  | Clear       | 53                    | 38                             | 96                             | 1,400                 | 1,300                  | 72                        | 76 D                   |
|                         | Black       | 53                    | 45                             | 100                            | 1,400                 | 1,400                  | 51                        | 76 D                   |
| IND6845                 | Matte Black | 80                    | 48                             | 40                             | 2,100                 | 2,100                  | 30                        | 82 D                   |
| <b>SPECIALTY</b>        |             |                       |                                |                                |                       |                        |                           |                        |
| 3955                    | Black (FST) | > 300                 | 67                             | 2                              | 3,600                 | 4,600                  | 23                        | 82 D                   |
| IND3380                 | Black (ESD) | 190                   | 50                             | 2                              | 3,000                 | 3,400                  | 13                        | 86 D                   |
| <b>HIGH TEMPERATURE</b> |             |                       |                                |                                |                       |                        |                           |                        |
| IND147                  | Black       | 290                   | 67                             | 2                              | 3,200                 | 3,700                  | 15                        | 94 D                   |
| IND249                  | Black       | 115                   | 98                             | 5                              | 3,300                 | 3,600                  | 24                        | 88 D                   |
| IND406                  | Black       | 107                   | 55                             | 25                             | 1,600                 | 1,900                  | 35                        | 79 D                   |
| <b>ELASTOMER</b>        |             |                       |                                |                                |                       |                        |                           |                        |
| IND402                  | Black       | -                     | 7                              | 260                            | 42                    | -                      | -                         | 82 A (5 sec)           |
| IND475                  | Black       | -                     | 3.2                            | 140                            | 2.5                   | -                      | -                         | 48 A (5 sec)           |
|                         | White       | -                     | 4.6                            | 160                            | 1.1                   | -                      | -                         | 62 A (5 sec)           |
| IND5714                 | Gray        | -                     | 2.8                            | 190                            | 4.5                   | -                      | -                         | 53 A (5 sec)           |
| <b>GENERAL PURPOSE</b>  |             |                       |                                |                                |                       |                        |                           |                        |
| IND403                  | Black       | 80                    | 70                             | 10                             | 2,600                 | 2,700                  | 27                        | 78 D                   |
| <b>PROTOTYPING</b>      |             |                       |                                |                                |                       |                        |                           |                        |
| PRO410                  | Black       | 76                    | 48                             | 5                              | 1,900                 | 2,500                  | 28                        | 84 D                   |
| PRO417                  | Black       | 49                    | 40                             | 100                            | 1,300                 | 900                    | 54                        | 73 D                   |
| PRO476                  | Black       | 62                    | 42                             | 60                             | 1,700                 | 2,000                  | 45                        | 78 D                   |
| PRO9274                 | Gray        | 52                    | 33                             | 7                              | 1,500                 | 2,100                  | 23                        | 80 D                   |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.

## Tough Resins

### TOUGH MATERIALS FOR FINAL PARTS PRODUCTION

Unique high impact resistant 3D printing materials for durable, functional and production parts.

### IDEAL FOR

- Manufacturing aids
- Housings and coverings
- Jigs and fixtures
- Insoles

### PROPERTIES

- Printable at room temperature
- Excellent performance and durability vs. other resins in the market
- Printable at high resolution
- Outstanding surface finishing

## LOCTITE 3D 3172

### TOUGH & HIGH IMPACT MATERIAL



Scan QR code to access the TDS

Resin that enables functional parts production that require high stiffness with a good surface finish and high impact resistance. Attributes are similar to Polypropylene (PP).

### Benefits

- Tough & durable
- Superior impact strength
- Nice surface finish, machine-able

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Gray  |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 52    |
| Tensile Stress at Break (MPa) | ASTM D638  | 39    |
| Elongation at Break (%)       | ASTM D638  | 100   |
| Young's Modulus (MPa)         | ASTM D638  | 1,500 |
| Flexular Modulus (MPa)        | ASTM D790  | 1,100 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 73    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 63    |

## LOCTITE 3D 3843

### TOUGH RESIN



Scan QR code to access the TDS

Semi-flexible resin with moderate temperature resistance HDT60, high impact strength, and versatility for a broad range of applications. Ideal for a wide variety of tooling applications on the production floor.

### Benefits

- Moderate heat resistance, HDT 60° C
- Tough with outstanding surface finish
- Superior strength and impact resistant

| PROPERTY <sup>1</sup>         | METHOD     |       |       |             |
|-------------------------------|------------|-------|-------|-------------|
| Color                         | -          | Clear | White | Matte Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 63    | 60    | 63          |
| Tensile Stress at Break (MPa) | ASTM D638  | 44    | 49    | 51          |
| Elongation at Break (%)       | ASTM D638  | 41    | 48    | 43          |
| Young's Modulus (MPa)         | ASTM D638  | 1,700 | 1,700 | 1,800       |
| Flexular Modulus (MPa)        | ASTM D790  | 1,900 | 1,700 | 1,800       |
| IZOD Impact Notched (J/m)     | ASTM D256  | 65    | 58    | 53          |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 63    | 76    | 67          |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.

## Tough Resins

### TOUGH MATERIALS FOR FINAL PARTS PRODUCTION

Unique high impact resistant 3D printing materials for durable, functional and production parts.

### IDEAL FOR

- Manufacturing aids
- Housings and coverings
- Jigs and fixtures
- Insoles

### PROPERTIES

- Printable at room temperature
- Excellent performance and durability vs. other resins in the market
- Printable at high resolution
- Outstanding surface finishing

## LOCTITE 3D IND405

### HIGH IMPACT, HIGH ELONGATION RESIN



Rigid, high elongation and high tough one-part material with excellent surface finish properties. Properties are comparable to an unfilled thermoplastic like Polypropylene (PP).

### Benefits

- High impact resistance with high elongation
- Easy to print (one-part material)
- Tough and Durable
- The toughest clear resin (only applicable for clear material)

| PROPERTY <sup>1</sup>         | METHOD     | Clear | Black |
|-------------------------------|------------|-------|-------|
| Color                         | -          | Clear | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 53    | 53    |
| Tensile Stress at Break (MPa) | ASTM D638  | 38    | 45    |
| Elongation at Break (%)       | ASTM D638  | 96    | 100   |
| Young's Modulus (MPa)         | ASTM D638  | 1,400 | 1,400 |
| Flexular Modulus (MPa)        | ASTM D790  | 1,300 | 1,400 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 72    | 51    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 76    | 76    |

## LOCTITE 3D IND6845

### UNIQUE COMBINATION OF HDT AND TOUGHNESS



Resin that offers a solid balance of HDT and toughness, producing smooth, detailed parts. Its strong impact resistance suits wear-prone components.

### Benefits

- Excellent H&S rating
- TPO-free
- Improved processing/printability

| PROPERTY <sup>1</sup>         | METHOD     | Matte Black |
|-------------------------------|------------|-------------|
| Color                         | -          | Matte Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 80          |
| Tensile Stress at Break (MPa) | ASTM D638  | 48          |
| Elongation at Break (%)       | ASTM D638  | 40          |
| Young's Modulus (MPa)         | ASTM D638  | 2,100       |
| Flexular Modulus (MPa)        | ASTM D790  | 2,100       |
| IZOD Impact Notched (J/m)     | ASTM D256  | 30          |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 82          |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.



## Specialty Resins

RESINS WITH DISTINCT PROPERTIES

Specialized resins characterized by distinct and unique properties tailored to specific industrial or commercial applications.

### LOCTITE 3D 3955

FST MATERIAL WITH UL94 V0 FLAMMABILITY



Scan QR code to access the TDS

First photopolymer with flame retardancy that passes vertical burn and aerospace FST standards .

#### Benefits

- Fire Safety Material
- Halogen Free
- Excellent flexural and tensile physical properties
- UL94 V0 flammability at a thickness of 3 mm
- FST (AITM2-0002, AITM2-0007, AITM3-0005)

#### Ideal for

- Electrical connectors and housing
- Aerospace and rail applications

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | > 300 |
| Tensile Stress at Break (MPa) | ASTM D638  | 67    |
| Elongation at Break (%)       | ASTM D638  | 2     |
| Young's Modulus (MPa)         | ASTM D638  | 3,600 |
| Flexular Modulus (MPa)        | ASTM D790  | 4,600 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 23    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 82    |

### LOCTITE 3D IND3380

ESD



Scan QR code to access the TDS

Known for its smooth surface finish and high chemical resistance with versatility in diverse applications.

#### Benefits

- Displays electrostatic dissipative properties (ESD)
- High HDT of 190°C
- High accuracy and fine detail printing

#### Ideal for

- Tooling at high temperature
- Jigs and fixtures for electronic device manufacturing processes

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 190   |
| Tensile Stress at Break (MPa) | ASTM D638  | 50    |
| Elongation at Break (%)       | ASTM D638  | 2     |
| Young's Modulus (MPa)         | ASTM D638  | 3,000 |
| Flexular Modulus (MPa)        | ASTM D790  | 3,400 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 13    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 86    |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.

## High Temperature Resins

### TEMPERATURE RESISTANT MATERIALS FOR FINAL PARTS PRODUCTION

Unique 3D printing materials for functional production parts that withstands high temperature requirements.

### IDEAL FOR

- Functional prototyping
- Encapsulation
- Mounts and housings
- HVAC Components
- Clips and Plugs for Control Systems/ Cabinets
- Connectors, Electronic Housings

### PROPERTIES

- Printable at room temperature
- Outstanding performance and durability vs. other resins in the market
- Easy to print at high resolution

## LOCTITE 3D IND147

### HIGH TEMPERATURE RESIN FOR TOOLING & MOLDING



Rigid resin designed for tooling and molding applications owing to its high stiffness and high temperature resistance withstanding up to 290°C

### Benefits

- Good dimensional stability
- Good surface finish

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 290   |
| Tensile Stress at Break (MPa) | ASTM D638  | 67    |
| Elongation at Break (%)       | ASTM D638  | 2     |
| Young's Modulus (MPa)         | ASTM D638  | 3,200 |
| Flexular Modulus (MPa)        | ASTM D790  | 3,700 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 15    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 94    |

## LOCTITE 3D IND249

### EXCELLENT FOR FINE FEATURE RESOLUTION



A high-temperature, high-strength material that prints challenging geometries with fine feature resolution. This low viscosity material features exceptionally high green strength to enable ease of processing.

### Benefits

- Exceptionally high stiffness
- High accuracy
- Good temperature resistance
- Very high chemical resistance

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 115   |
| Tensile Stress at Break (MPa) | ASTM D638  | 98    |
| Elongation at Break (%)       | ASTM D638  | 5     |
| Young's Modulus (MPa)         | ASTM D638  | 3,300 |
| Flexular Modulus (MPa)        | ASTM D790  | 3,600 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 24    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 88    |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.

## High Temperature Resins

TEMPERATURE RESISTANT MATERIALS FOR FINAL PARTS PRODUCTION

Unique 3D printing materials for functional production parts that withstands high temperature requirements.

### IDEAL FOR

- Functional prototyping
- Encapsulation
- Mounts and housings
- HVAC Components
- Clips and Plugs for Control Systems/ Cabinets
- Connectors, Electronic Housings

### PROPERTIES

- Printable at room temperature
- Outstanding performance and durability vs. other resins in the market
- Easy to print at high resolution

## LOCTITE 3D IND406

OUR TOUGHEST HIGH TEMPERATURE RESIN



Tough resin designed for interior applications in Automotive, due to its high surface quality, dimensional accuracy and temperature resistance.



Scan QR code to access the TDS

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 107   |
| Tensile Stress at Break (MPa) | ASTM D638  | 55    |
| Elongation at Break (%)       | ASTM D638  | 25    |
| Young's Modulus (MPa)         | ASTM D638  | 1,600 |
| Flexular Modulus (MPa)        | ASTM D790  | 1,900 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 35    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 79    |

### Benefits

- High heat deflection temperature, HDT >100 °C
- Tough and durable
- Good surface finish

## Elastomer Resins

ELASTOMERIC MATERIALS FOR FUNCTIONAL PROTOTYPING AND FINAL PARTS PRODUCTION

Unique 3D printing materials for durable, functional, production parts with elastomeric behavior.

### IDEAL FOR

- Gaskets
- Seal prototyping
- Anatomical models
- Consumer products
- Tube's prototyping
- Gaskets, seals prototyping
- Lattice structures for sportswear

### PROPERTIES

- Printable at room temperature
- True elastomeric behavior
- Stable -20 to +100°C
- Good interlayer adhesion with low shrinkage
- Outstanding performance and durability

## LOCTITE 3D IND402

HIGH REBOUND



Scan QR code to access the TDS

Single component elastomer material with high elongation and high resilience, excellent tensile strength and high energy return while also not requiring thermal post processing.

### Benefits

- True elastomeric behavior
- Excellent interlayer adhesion
- Good rebound performance

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| Tensile Stress at Break (MPa) | ASTM D412  | 7     |
| Elongation at Break (%)       | ASTM D412  | 260   |
| Young's Modulus (MPa)         | ASTM D638  | 42    |
| Shore Hardness (A) 5 sec      | ASTM D2240 | 82    |

## LOCTITE 3D IND475

EASY TO PRINT



Scan QR code to access the TDS

An industrial strength UV resin that cures to a soft, elastomeric material. IND475 is suitable for applications where resilience, snap back, and tear resistance is desired, such as lattice structures and functional prototyping. This single component resin is easy to print of a variety of platforms, making it a superior material for elastomeric applications.

### Benefits

- True elastomeric behavior
- Fast Printing with low shrinkage behavior
- High resilience / High energy return
- Exceptional durability compression forces

| PROPERTY <sup>1</sup>         | METHOD     | Black | White |
|-------------------------------|------------|-------|-------|
| Color                         | -          | Black | White |
| Tensile Stress at Break (MPa) | ASTM D412  | 3.2   | 4.6   |
| Elongation at Break (%)       | ASTM D412  | 140   | 160   |
| Young's Modulus (MPa)         | ASTM D638  | 2.5   | 1.1   |
| Shore Hardness (A) 5 sec      | ASTM D2240 | 48    | 62    |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.



## Elastomer Resins

ELASTOMERIC MATERIALS FOR FUNCTIONAL PROTOTYPING AND FINAL PARTS PRODUCTION

Unique 3D printing materials for durable, functional, production parts with elastomeric behavior.

### IDEAL FOR

- Gaskets
- Seal prototyping
- Anatomical models
- Consumer products
- Tube's prototyping
- Gaskets, seals prototyping
- Lattice structures for sportswear

### PROPERTIES

- Printable at room temperature
- True elastomeric behavior
- Stable -20 to +100°C
- Good interlayer adhesion with low shrinkage
- Outstanding performance and durability

## LOCTITE 3D IND5714

ONE-PART SOLUTION FOR HIGH-REBOUND



LOCTITE 3D IND5714 is a gray elastomer with high rebound properties and excellent repetitive strain resistance. Shore A hardness combined with excellent compression set, good tear resistance and strength makes this material ideal for use in a wide variety of industrial elastomeric, safe touch applications.



| PROPERTY <sup>1</sup>         | METHOD     |      |
|-------------------------------|------------|------|
| Color                         | -          | Gray |
| Tensile Stress at Break (MPa) | ASTM D412  | 2.8  |
| Elongation at Break (%)       | ASTM D412  | 190  |
| Young's Modulus (MPa)         | ASTM D638  | 4.5  |
| Shore Hardness (A) 5 sec      | ASTM D2240 | 53   |

### Benefits

- Safe touch and high rebound
- Improved processing with excellent H&S Rating
- TPO-Free

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.

## General Purpose Resins

Our general-purpose 3D resin is an ideal choice for tooling and mold applications. Its versatility and precision make it a valuable resource for creating durable and high-quality components.

### IDEAL FOR

- Tooling and molds
- Interior applications in automotive

## LOCTITE 3D IND403

### HIGH MODULUS TOUGH RESIN FOR TOOLING



Rigid resin ideal for tooling and end use parts up to 80°C service temperature. Great dimensional accuracy and printability at high resolution.



Scan QR code to access the TDS

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 80    |
| Tensile Stress at Break (MPa) | ASTM D638  | 70    |
| Elongation at Break (%)       | ASTM D638  | 10    |
| Young's Modulus (MPa)         | ASTM D638  | 2,600 |
| Flexular Modulus (MPa)        | ASTM D790  | 2,700 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 27    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 78    |

### Benefits

- High heat deflection temperature, HDT 80 °C
- Tough with good dimensional stability
- Good surface finish

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.

## Prototyping Resins

RESIN MATERIALS FOR PRECISION  
PROTOTYPING AND PRODUCTION NEEDS

LOCTITE Pro series resins offer a seamless transition from prototyping to high-volume production. They provide durability, reliability, and performance at an affordable price for producing large quantities of parts. These resins are compatible with a wide range of DLP/LCD printers.

### LOCTITE 3D PRO410

HIGH-SPEED, HIGH-RESOLUTION PHOTOPOLYMER  
FOR PRECISE PROTOTYPING



Scan QR code to  
access the TDS

### LOCTITE 3D PRO417

HIGH-STRENGTH PHOTOPLASTIC FOR DIVERSE  
PROTOTYPE AND TOOLING APPLICATIONS



Scan QR code to  
access the TDS

#### Benefits

- Excellent surface finish
- 3X faster printing\*
- Accurate prototypes

#### Ideal for

- Printer setup and calibration
- Rapid prototypes

\*vs other LOCTITE 3D printing resins

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 76    |
| Tensile Stress at Break (MPa) | ASTM D638  | 48    |
| Elongation at Break (%)       | ASTM D638  | 5     |
| Young's Modulus (MPa)         | ASTM D638  | 1,900 |
| Flexular Modulus (MPa)        | ASTM D790  | 2,500 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 28    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 84    |

#### Benefits

- Moderate heat resistance, HDT 49° C
- Tough with outstanding surface finish
- Superior strength and impact resistant

#### Ideal for

- Manufacturing aids
- Jigs and fixtures
- Housings and covers
- Insoles

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 49    |
| Tensile Stress at Break (MPa) | ASTM D638  | 40    |
| Elongation at Break (%)       | ASTM D638  | 100   |
| Young's Modulus (MPa)         | ASTM D638  | 1,300 |
| Flexular Modulus (MPa)        | ASTM D790  | 900   |
| IZOD Impact Notched (J/m)     | ASTM D256  | 54    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 73    |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.

## Prototyping Resins

RESIN MATERIALS FOR PRECISION  
PROTOTYPING AND PRODUCTION NEEDS

LOCTITE Pro series resins offer a seamless transition from prototyping to high-volume production. They provide durability, reliability, and performance at an affordable price for producing large quantities of parts. These resins are compatible with a wide range of DLP/LCD printers.

### LOCTITE 3D PRO476

HIGH-STRENGTH PHOTOPLASTIC OPTIMIZED  
FOR LCD PRINTING



Scan QR code to  
access the TDS

### LOCTITE 3D PRO9274

GENERAL PURPOSE  
PHOTOPOLYMER FOR PRECISE PROTOTYPING



Scan QR code to  
access the TDS

#### Benefits

- Tough
- High impact resistance
- Moderate heat resistance, HDT 60°C
- Excellent surface finish

#### Ideal for

- Textured and highly detailed parts
- Performance prototypes
- Jigs, fixtures & manufacturing aids
- Housing and covers

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Black |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 62    |
| Tensile Stress at Break (MPa) | ASTM D638  | 42    |
| Elongation at Break (%)       | ASTM D638  | 60    |
| Young's Modulus (MPa)         | ASTM D638  | 1,700 |
| Flexular Modulus (MPa)        | ASTM D790  | 2,000 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 45    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 78    |

#### Benefits

- Easy to print
- High detail
- Durable
- Economical

#### Ideal for

- High volume general purpose
- Prototypes and test parts
- Jigs, fixtures and tools

| PROPERTY <sup>1</sup>         | METHOD     |       |
|-------------------------------|------------|-------|
| Color                         | -          | Gray  |
| HDT at 0.455 MPa (°C)         | ASTM D648  | 52    |
| Tensile Stress at Break (MPa) | ASTM D638  | 33    |
| Elongation at Break (%)       | ASTM D638  | 7     |
| Young's Modulus (MPa)         | ASTM D638  | 1,500 |
| Flexular Modulus (MPa)        | ASTM D790  | 2,100 |
| IZOD Impact Notched (J/m)     | ASTM D256  | 23    |
| Shore Hardness (D) 3 sec      | ASTM D2240 | 80    |

For further information please see TDS, contact Technical Service Centre or Customer Service Representative. The physical properties provided in this document are typical results of printed parts and are provided for reference purposes only. <sup>1</sup> All data after post-cure. HDT: Heat Deflection Temperature. Test method for Elastomer: D412. For additional information please refer to the respective TDS.



# Innovative Solutions In Action: Case Studies

## TOUGH RESIN

### Spare Parts for Alstom Manufactured with LOCTITE Materials



#### Challenge


Alstom is a multinational company that provides sustainable mobility solutions for high-speed trains. An Alstom fleet that has been running for ten years was experiencing part degradation. The Alstom Maintenance team in Nola, Italy, needed to replace two-hundred footrest parts due to damaged or vandalized parts aboard the AGV ETR575. Alstom explored solutions, such as a new mold, which was too expensive to produce spare parts. Alstom decided to make the switch and explore 3D Printing solutions.

#### Solution

Alstom discovered that 3D Printing was the best solution to manufacture spare parts. They considered the long-term stability of the resin for parts that would withstand years in a commercial setting and settled on the LOCTITE 3D Printing portfolio. After evaluating the LOCTITE materials portfolio, Alstom determined that LOCTITE 3D 3843 was the best solution for their application requirements. LOCTITE 3D 3843 exhibits a superior finish and moderate temperature resistance, which ultimately sealed the choice for this material.

#### Benefits

Alstom received the footrest parts and immediately implemented them in a passenger saloon of an AGV ETR575, a very high-speed, electric multiple-unit passenger train. Ultimately, they reduced their lead time by 96% and cut overall costs by 25%. Alstom's original lead time was 180 days, but after turning to LOCTITE, their lead time is now only one week. By leveraging 3D Printing and Additive Manufacturing, the team saved more than 20,000 EUR and 172 days of lead time, which is monumental from an operations standpoint.



Scan QR code for more details

## HIGH TEMPERATURE RESIN

### LOCTITE Materials Used to Manufacture Blow Molds for PepsiCo



#### Challenge

Creating conventional metal tooling for the blow molding of bottles is an expensive and time-consuming proposition. In a time where speed to market has never been so important in the consumer goods sector, food & beverage giant PepsiCo decided to adapt a hybrid model and set out to explore the possibilities of combining parts of a conventional metal mold with 3D printed inserts in order to redesign their bottle and package designs to fulfil customers desires.

#### Solution

PepsiCo chose Nexa3D's xPEEK147 from Henkel LOCTITE for the 3D printed tool inserts due to the material's strength and impressive performance factors, including its very high heat-deflection temperature. PepsiCo found the material performance to be ideal for producing the mold components it needs.

#### Benefits

By leveraging 3D Printing and the additive process for the 3D printed inserts and combining this with parts of a conventional metal mold a complete mold set can be made in 12 hours, with 8 hours of 3D printing time and 4 hours of curing. These hybrid-made molds can then successfully be used for more than 10,000 bottles before failure – at up to a 96% reduction of cost compared to traditional metal tooling.



Scan QR code for more details



## SUMMARY

- Every application has its own unique requirements, and we are here to support your journey towards additive manufacturing at industrial scale
- LOCTITE offers you a broad material portfolio of tough, specialty, high temperature resistant, elastomer, prototyping and medical resins for a broad range of leading DLP and LCD systems
- We work with industry leaders and equipment manufacturers to ensure our materials are validated within a qualified industrial workflow
- LOCTITE materials allow you to produce functional, repeatable and reliable parts



## Value for You



### Technology Experts

We are the photopolymer technology experts



### Promise of LOCTITE Brand

We leverage decades of industrial experience of solving real manufacturing challenges, across markets



### Trusted Eco-System Partners

We work with ecosystem partners like service bureaus, OEM printer partner and experts in post processing to ensure production of functional, repeatable and reliable parts



### Validation

Unlocking Customer Readiness with validated

- Workflows
- Materials properties/ customization
- Parts design
- Quality management system

# LOCTITE®

## 3D PRINTING

Test your application with our materials.

Contact our engineers to get support:  
[Loctite3DP@henkel.com](mailto:Loctite3DP@henkel.com)

Learn more about our application cases.  
Visit [LoctiteAM.com](http://LoctiteAM.com)



### Europe

**Henkel AG & Co. KGaA**  
Henkelstraße 67  
40589 Düsseldorf  
Germany  
Tel.: +49 211 7970

**Henkel Nederland B.V**  
Brugwal 11  
3432 NZ Nieuwegein  
The Netherlands  
Tel.: +31 30 607 38 52

**Henkel Italia Srl**  
Via C. Amoretti 78  
20157 Milan  
Italy  
Tel.: +39 2 357 921

**Henkel Belgium N.V**  
Esplanade 1 – PO box 101  
1020 Brussels  
Belgium  
Tel.: +32 2 421 2611

**Henkel Central Eastern Europe GmbH**  
Endbergstr. 29  
1030 Wien  
Austria  
Tel.: +49 89 320 800 1600

**Henkel France S.A.S.**  
161, Rue de Silly  
92100 Boulogne-Billancourt  
France  
Tel.: +33 1 46 84 90 00

**Henkel & Cie. AG**  
Salinenstr. 61  
4133 Pratteln  
Switzerland  
Tel.: +41 61 825 7000

**Henkel Limited**  
Wood Land End  
Hemel Hempstead, HP2 4RQ  
United Kingdom  
Tel.: +44 1442 278100

**Henkel Ibérica**  
Bilbao, 72-84  
08005 Barcelona  
Spain  
Tel.: +34 932 904 000

**Henkel Ibérica Portugal, Unipessoal Lda.**  
Rua D. Nuno Álvares Pereira, N° 4 e 4A  
Polígono das Actividades Económicas  
Parque Oriente - Blocos 1 e 2  
2695-167 Bobadela  
Portugal  
Tel.: +351 21957 8100

### USA

**Henkel Corporation**  
Engineering Adhesives  
One Henkel Way  
Rocky Hill, Connecticut 06067  
Tel.: 1 800 LOCTITE (562 8483)  
Tel.: 860 571 5100

### CANADA

**Henkel Canada Corporation**  
Engineering Adhesives  
2515 Meadowpine Blvd.  
Mississauga, Ontario L5N 6C3  
Tel.: 1 800 263 5043  
Tel.: 905 814 6511

The data contained herein are intended as reference only. Please contact Henkel Technical Support Group for assistance and recommendation on specifications for these products.

Except as otherwise noted, all marks used above in this printed material are trademarks and/or registered trademarks of Henkel and/or its affiliates in the US, Germany, and elsewhere. © Henkel AG & Co. KGaA, 2024 DSGN0040774 (10/2024)