



## LOCTITE CL42 HIGH INTENSITY LED FLOOD SYSTEM.

The LOCTITE CL42 System is a high intensity LED flood system specifically designed to cure LOCTITE light-cure adhesives. The large area flood allows for easy curing of large part assemblies and the LED heads can be stacked side-by-side, further expanding the curing area if needed. The system can be easily integrated into either benchtop or fully-automated processes, and a plug-and-play, fully-enclosed cure chamber is an available option.

### PRODUCT FEATURES:

- High intensity – up to 2,5 W/cm<sup>2</sup>
- Large cure area – 100 mm x 100 mm
- 405 nm and 365 nm options
- Side-by-side stacking of floodlight heads
- Dual-channel controller with intensity adjustment
- Colour touch screen
- LED temperature monitoring

### BENEFITS OF LED TECHNOLOGY:

- Up to 20.000-hour LED life
- Instant-on (no warm-up time)
- Low-energy / power consumption
- No IR emissions (reducing thermal damage and warp)
- Highly-focused UV and visible light wavelengths


## LOCTITE CL42 HIGH INTENSITY LED FLOOD SYSTEM

### SYSTEM COMPONENTS

| IDH #   | Description                |
|---------|----------------------------|
| 2804955 | CL42 LED Flood Head 365 nm |
| 2804956 | CL42 LED Flood Head 405 nm |
| 2804957 | CL42 LED Flood Controller  |

### PARTS AND ACCESSORIES (OPTIONAL)

| IDH #   | Description                         |
|---------|-------------------------------------|
| 2804959 | CL42 LED Flood Chamber              |
| 2804958 | CL42 LED Head Connection Cable      |
| 2804960 | CL42 Flood Chamber Connection Cable |

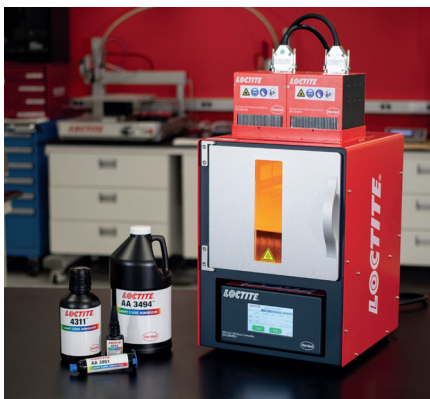

### CL42 LED FLOOD CHAMBER

The CL42 LED flood chamber offers plug-and-play integration with the LOCTITE CL42 LED flood system. The chamber features an adjustable parts table, ESD safety door with window, and can accommodate up to two CL42 LED flood heads. The compact design allows for storage of the flood controller underneath the unit to optimise the footprint.

Find out more and visit:  
[www.equipos.loctite.es](http://www.equipos.loctite.es)

Henkel Ibérica S. A.  
C/ Bilbao n.º 72 - 84  
08005 Barcelona  
España  
[www.henkel-adhesives.es](http://www.henkel-adhesives.es)

Departamento técnico  
Tel. 93 290 49 05  
[tecnico.industria@henkel.com](mailto:tecnico.industria@henkel.com)

Atención al cliente  
Tel. 93 290 44 86  
[cs.industria@henkel.com](mailto:cs.industria@henkel.com)

