

LOCTITE®



LOCTITE® 3D IND406™


High Temperature
Black

LOCTITE®
Henkel Corporation
loctite3d@henkel.com





IND406™ HIGH TEMPERATURE BLACK

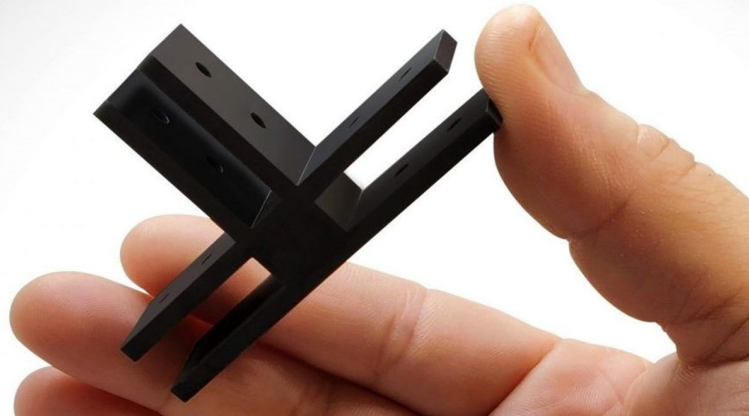

LOCTITE 3D IND406™

Our toughest High Temperature Resin

LOCTITE 3D IND406 is a high-strength, high elongation engineering plastic with good impact and high temperature resistance.

Stiffness, toughness and thermal durability make this material ideal for a wide variety of tools in the production floor and for final parts production in Automotive interior and manufacturing. The product is ideal for fixtures, interior and machinery parts.

LOCTITE 3D IND406 can be printed in various DLP printers and parts can be machined, tapped, or polished for final finish.



Benefits:

- High heat deflection temperature
- Tough and durable
- Good surface finish



Ideal for:

- Interior applications in automotive
- Tooling and fixtures
- Machinery components



Markets:



Industry



Automotive



Consumer
Goods

Tensile Stress at Break (MPa)

55

Young's Modulus (MPa)

1,600

Elongation at Break (%)

25

HDT at 0.455 MPa (°C)

107

Shore Hardness (D)


79

**Values shown are linked to LOCTITE IND406 Black as reference, please refer to the specific mechanical properties for each of the colors shown in this document*





IND406™ HIGH TEMPERATURE BLACK

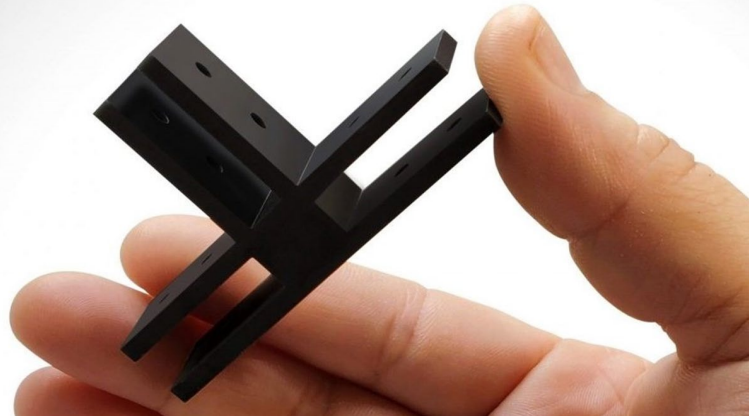

PROPERTIES

Mechanical Properties	Measure	Method	Green	Post Processed
Young's Modulus	MPa	ASTM D638	360 ± 50 ^[1]	1610 ± 40 ^[16]
Tensile Stress at Break	MPa	ASTM D638	17 ± 3 ^[1]	55 ± 1 ^[16]
Elongation at Break	%	ASTM D638	40 ± 6 ^[1]	25 ± 4 ^[2]
Flexural Modulus	MPa	ASTM D790	391 ± 28 ^[21]	1880 ± 25 ^[21]
Flexural Stress at Break	MPa	ASTM D790	-	-
Flexural Strain at Break	%	ASTM D790	>5 ^[21]	>5 ^[21]
IZOD Impact (Notched)	J/m	ASTM D256	75 ± 4 ^[3]	35 ± 8 ^[4]
Shore Hardness (3s)	D	ASTM D2240	57 ± 1 ^[6]	79 ± 1 ^[7]
Other Properties				
HDT at 0.455 MPa	°C	ASTM D648	-	107 ± 1 ^[5,17]
HDT at 1.82 MPa	°C	ASTM D648	-	81 ± 2 ^[5,17]
Water Absorption (24 h)	%	ASTM D570	-	1.4 ^[8]
Water Absorption (72 h)	%	ASTM D570	-	2.6 ^[9]
Solid Density	g/cm ³	ASTM D792	-	1.19 ^[18]
Thermal Conductivity	mW/m·K	ASTM D5930	-	206 ± 3 ^[14]
Heat Capacity	J/(g·K)	ASTM D5930	-	1.46 ± 0.04 ^[14]
Horizontal flame spread speed (1.4 mm thickness)	mm/min	DIN 75200	-	28 (Pass) ^[15]
Biocompatibility				
Cytotoxicity		ISO10993-5		Comply ^[19]
Irritation		ISO10993-23*		Comply ^[20]

Test parameters:

*All specimen are printed unless otherwise noted. All specimen were conditioned in ambient lab conditions at 19-23°C / 40-60% RH for at least 24 hours." ASTM Methods: D638 Type IV, 5 mm/min; D790-B, D256 Notched IZOD (Machine Notched), D648; D2240, Type "D" (0, 3 seconds); D570, 0.125" x 2" Disc, samples were dried at 50 °C for 24h; D7867 at 25°C (77°F) *The biological assessment has been performed based on the in vitro method according to ISO10993-23


Internal Data Sources:

[1] FOR34521, [2] FOR34437, [3] FOR20571, [4] FOR20572, [5] FOR33203, [6] FOR20367, [7] FOR20368, [8] FOR22529, [9] FOR22668, [10] FOR20806, [11] FOR25882, [12] FOR25880, [13] FOR25881, [14] FOR26105, [15] FOR30899, [16] FOR33166, [17] FOR33204, [18] FOR47937, [19] FOR27757, [20] FOR52821, [21] FOR235051





IND406™ HIGH TEMPERATURE BLACK

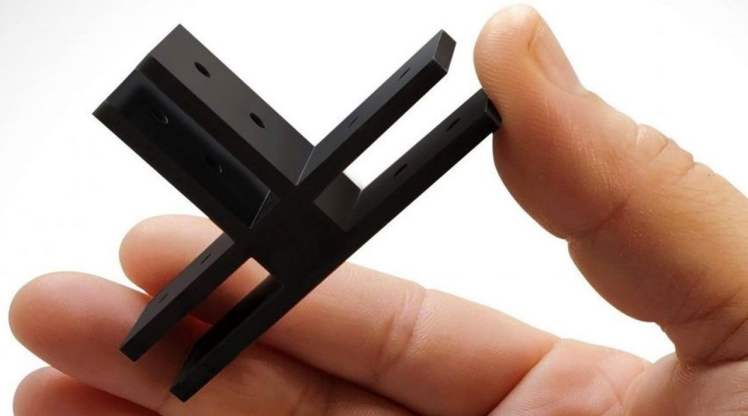

PROPERTIES

Liquid Properties	Measure	Method	Green	Post Processed
Viscosity at 25°C (77°F)	cP	ASTM D7867	-	1000 - 1300 ^[10]
Liquid Density	g/cm ³	ISO 1675	-	1.10 ^[18]

Electrical Properties	Measure	Method	Green	Post Processed
Dielectric Strength	kV/mm	ASTM D149	-	26.0 ± 0.3 ^[13]
Volume Resistance	Ω·cm	ASTM D257	-	4.5 ± 0.6 E+15 ^[12]
Surface Resistance	Ω	ASTM D257	-	1.1 ± 0.6 E+15 ^[12]
AC Relative Permittivity (Dielectric Constant) ^[11]				
at 50 Hz (XY)	none	ASTM D150	-	3.6
at 1 kHz (XY)	none	ASTM D150	-	3.4
at 1 MHz (XY)	none	ASTM D150	-	3.1
AC Loss Characteristics (Dissipation Factor) ^[11]				
at 50 Hz (XY)	none	ASTM D150	-	0.014
at 1 kHz (XY)	none	ASTM D150	-	0.019
at 1 MHz (XY)	none	ASTM D150	-	0.022

Test parameters:

All specimen are printed unless otherwise noted. All specimen were conditioned in ambient lab conditions at 19-23°C / 40-60% RH for at least 24 hours. ASTM Methods: D638 Type IV, 5 mm/min; D790-B, D256 Notched IZOD (Machine Notched), D648; D2240, Type "D" (0, 3 seconds); D570, 0.125" x 2" Disc, samples were dried at 50 °C for 24h; D7867@ 25°C (77°F) *The biological assessment has been performed based on the in vitro method according to ISO10993-23


Internal Data Sources:

[1] FOR34521, [2] FOR34437, [3] FOR20571, [4] FOR20572, [5] FOR33203, [6] FOR20367, [7] FOR20368, [8] FOR22529, [9] FOR22668, [10] GEN793136, [11] FOR25882, [12] FOR25880, [13] FOR25881, [14] FOR26105, [15] FOR30899, [16] FOR33166, [17] FOR33204, [18] FOR47937, [19] FOR27757, [20] FOR52821, [21] FOR235051





IND406™ HIGH TEMPERATURE BLACK

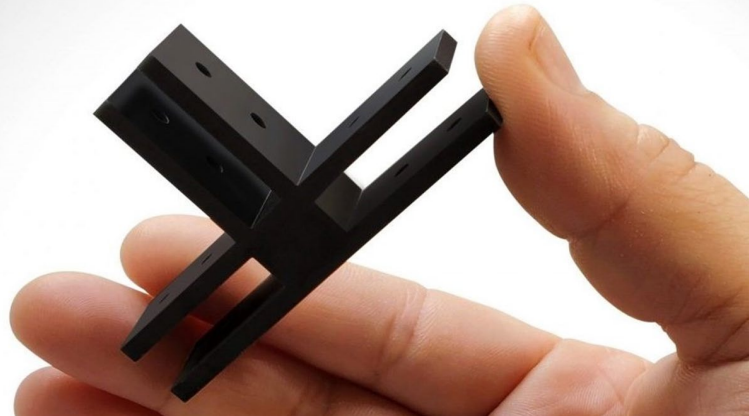

WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

PRINTER SETTINGS

LOCTITE 3D IND406 BK is formulated to print optimally on industrial DLP printer. Read the safety data sheet carefully to get details about health and safety instructions. Recommended print parameters:

- Shake resin bottle well before usage
- Temperature: 20°C to 35°C
- Intensity: 3 mW/cm² to 7 mW/cm²

Exposure time for an intensity of 4-7 mW/cm²

Layer Thickness (µm)	100	E _c (mJ/cm ²)	6.45
Burn-in Region (s)	40	D _p (mm)	0.28
Model Region (s)	6		

CLEANING


LOCTITE 3D IND406 BK requires post processing to achieve specified properties. Prior to post curing, support structures should be removed from the printed part, and the part should then be washed. Use compressed air to remove residual solvent from the surface of the material between intervals.

Post Process Step	Agent	Method	Duration	Intervals	Additional Info
Cleaning	IPA	Ultra sonic bath	3 min	1	Allow parts to dry between intervals
Dry	n.a.	Compressed air	10 to 60 s	1	Air pressure (50 psi)
Wait before post curing	n.a.	Ambient condition	60 min	1	Room temperature





IND406™ HIGH TEMPERATURE BLACK

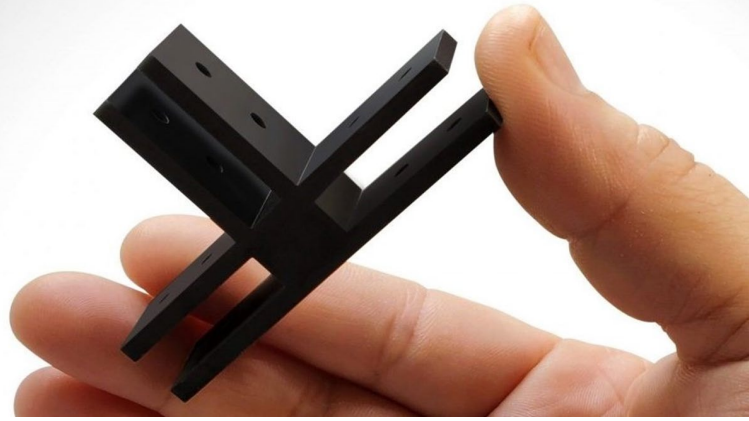

WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

POST CURING

LOCTITE 3D IND406 BK requires a two-step post curing to achieve specified properties. In the first step it is recommended that either an LED or wide spectrum lamp be used to UV post cure parts. In the second step the UV post cured parts require an additional Heat post cure to achieve final properties.


STEP 1: UV post cure

UV Curing Unit	UV Source	Intensity	Cure time per side	Additional Settings (Shelf, Output Energy)
Loctite UVALOC 1000	Mercury Arc Bulb (broad spectrum)	30 mW/cm ² at 365 nm	10 min	500 W, lowest shelf
Rapidshape RS Cure XL	Multiple LEDs	150%	30 min	Third shelf from bottom, Vacuum: 50 mbar





IND406™ HIGH TEMPERATURE BLACK

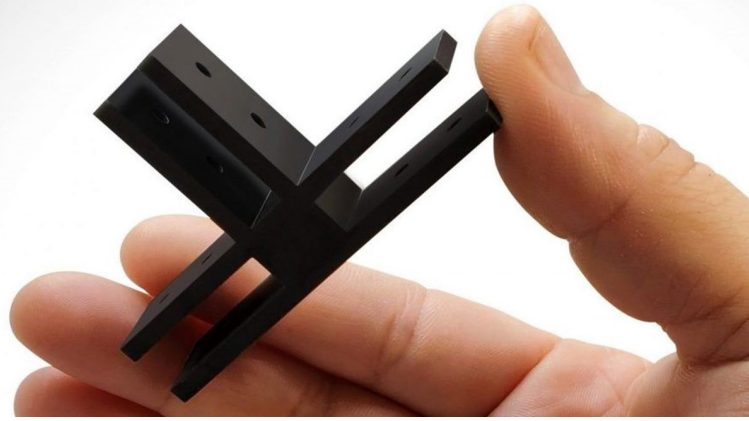

WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>

POST CURING


LOCTITE 3D IND406 BK requires a two-step post curing to achieve specified properties.

STEP 2: Heat post cure

After UV post curing, an additional Heat post cure at 140°C for 2 hours is required to reach final properties. Let parts rest one hour between UV post cure and Heat post cure.


To minimize risk of warpage place parts in the oven at standard lab conditions with $T_{\text{start}} = 22^{\circ}\text{C}$ before ramping temperature with are rate of $R_T \leq 4^{\circ}\text{C}/\text{min}$ to target value of $T_{\text{cure}} = 140^{\circ}\text{C}$.

After 2 hours at $T_{\text{cure}} = 140^{\circ}\text{C}$ cool down parts slowly in the switched off oven to standard lab conditions with $T_{\text{end}} = 22^{\circ}\text{C}$. Do not remove the parts from the oven before they reached lab temperature to prevent thermal stress and warpage.

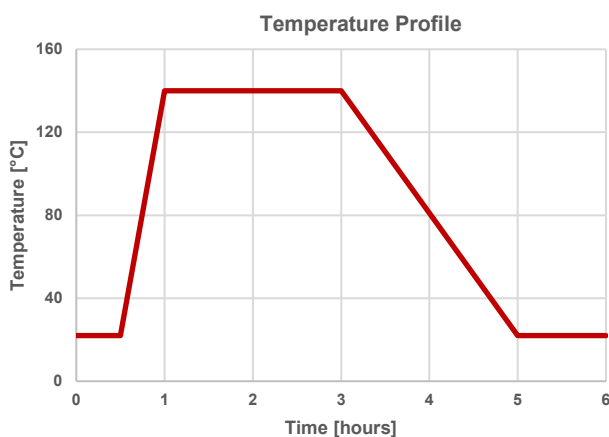



IND406™
HIGH TEMPERATURE
BLACK

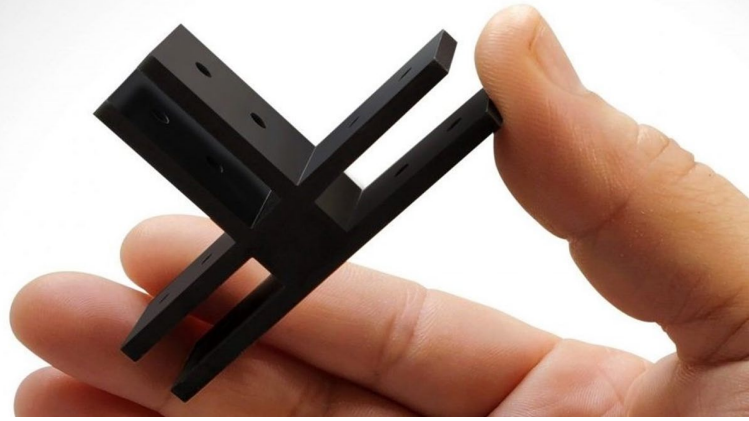

WORKFLOW

Validated workflows need to be followed to achieve properties as provided in the TDS. Examples of validated workflow steps are listed below. Users should defer to the most current workflow information for best results which can be found at <https://www.loctiteam.com/printer-validation-settings>


STORAGE

Store **LOCTITE 3D IND406 BK** in the unopened container in a dry location. Optimal Storage: 8°C to 30°. Storage below 8°C or above 30°C can adversely affect product properties. Material removed from containers may be contaminated during use. For this reason, filter used resin with 190µm mesh filter before placing back into proper storage container.





IND406™ HIGH TEMPERATURE BLACK

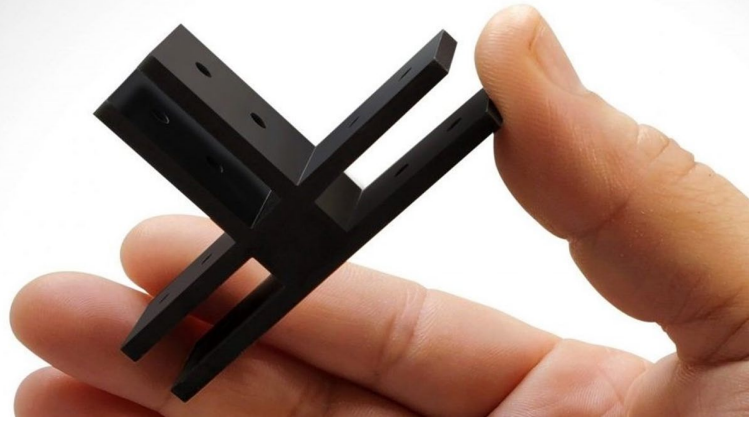


AGEING AND ENVIRONMENTAL EFFECTS – HEAT AGEING

LOCTITE 3D 406 BK was heat aged without load according to ASTM D3045. Test samples were exposed for a defined time at 50°C and conditioned for 24 hours at 22°C before mechanical testing. Control samples were stored at a constant 22°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C).


"0 weeks" represents non-aged samples stored at 22°C and tested 24 hours after post-processing.

Based on temperature dependence of reaction rates a test time of 6 weeks at 50°C can be interpreted as approximately 12 months at ambient temperature.


Young's Modulus after Heat Ageing at 50°C

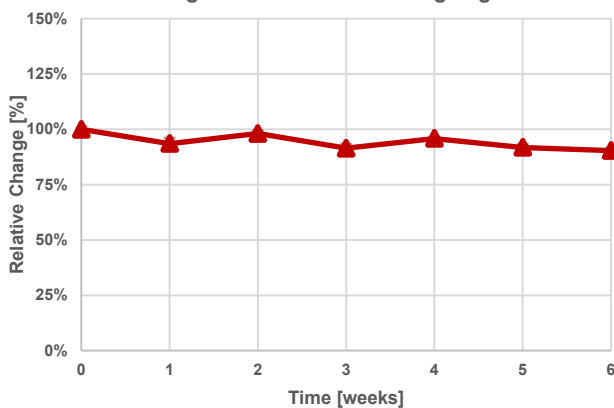

Elongation at Break after Heat Ageing at 50°C

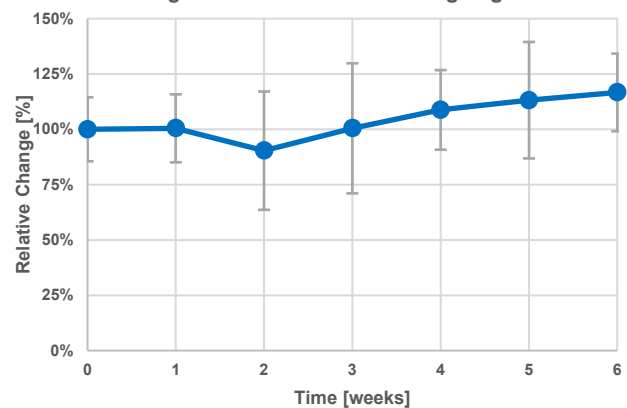

Stress at Break after Heat Ageing at 50°C

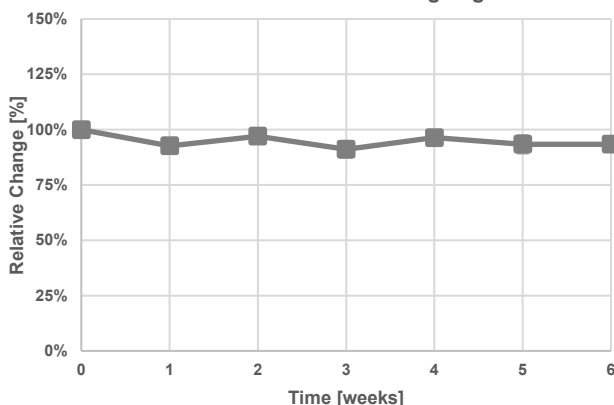

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C


Internal Data Sources:

FOR163707, FOR163721





IND406™ HIGH TEMPERATURE BLACK

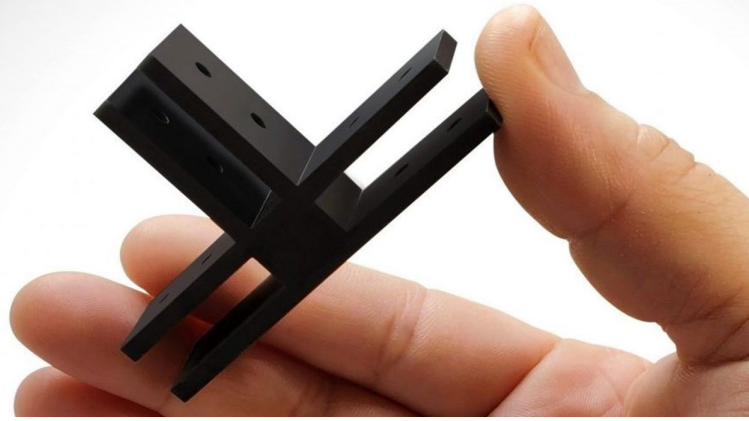


AGEING AND ENVIRONMENTAL EFFECTS – ACCELERATED WEATHERING (UV AGEING)


LOCTITE 3D IND406 BK has been tested after accelerated outdoor weathering according to ASTM D4329 (Cycle A). Test samples were exposed to defined conditions of heat, water condensation and UV light. Exposed samples were conditioned for 24 hours at 22°C before mechanical testing. Control samples were stored at a constant 22°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C). "0 weeks" represents non-aged samples stored at 22°C and tested 24 hours after post-processing.

Please note, accelerated weathering testing can never fully represent real outdoor conditions and complexity. It is therefore recommended to conduct additional (outdoor) testing relevant for your specific application needs.


Young's Modulus after UV Ageing

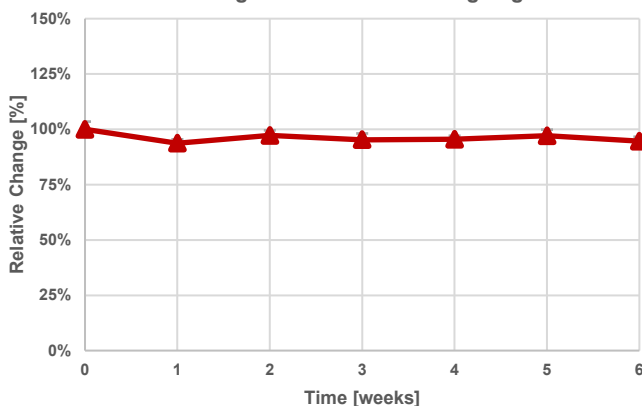

Elongation at Break after UV Ageing

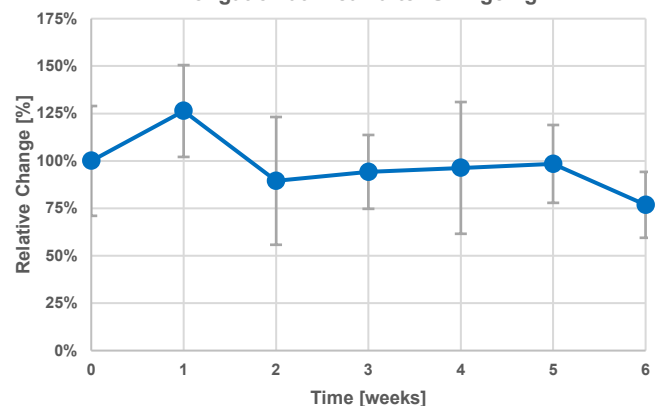

Stress at Break after UV Ageing

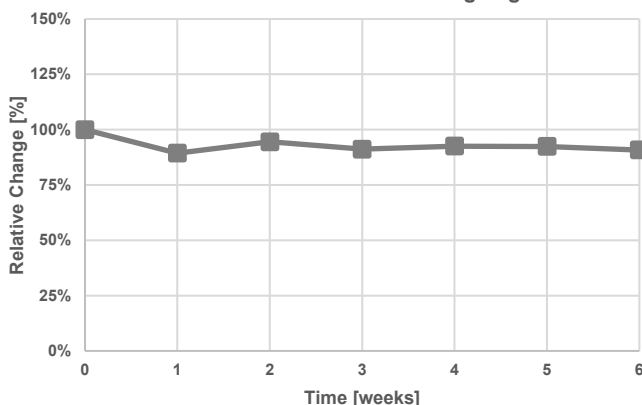

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1% (regression), 22 °C
ASTM D4329: Cycle A for general applications, QUV/se, UVA 340 nm, 0.89 W/m²·nm, 8 hours UV light at 60°C followed by 4 hours at 50°C condensation in the dark. To reduce any sample warpage during test time samples were placed in tailor-made holders without any fixation clamps or mechanical load. Exposed samples were always removed from QUV before next condensation cycle to avoid samples that are soaked excessively with water before testing.


Internal Data Sources:

FOR590829





IND406™ HIGH TEMPERATURE BLACK

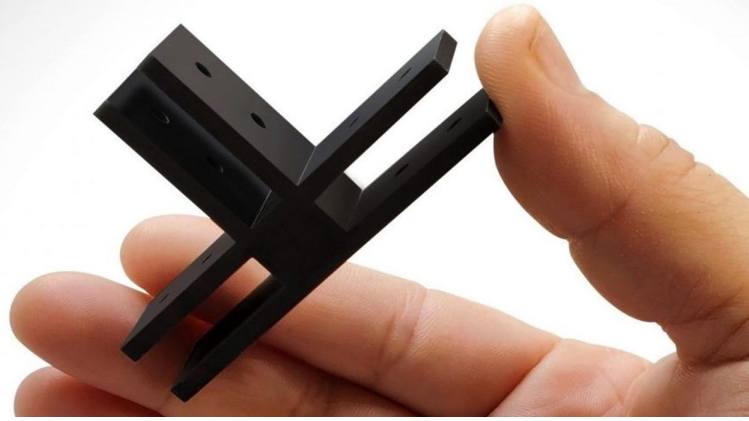


AGEING AND ENVIRONMENTAL EFFECTS – CLIMATE CYCLING TEST (PV1200)

LOCTITE 3D IND406 BK was tested in an environmental climate cycling test according to PV1200 specification. This specification was developed by Volkswagen AG to evaluate material durability and cycles between -40°C (4 hours) and 80°C (4 hours at 80 % rel. humidity) during a repeating 12-hour cycle. Test samples were exposed to this temperature cycle for a total duration of 7 weeks (100 cycles).


Before mechanical testing samples were conditioned for 24 hours at 22°C. Control samples were stored at a constant 22°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C).

"0 weeks" represents non-aged samples stored at 22°C and tested 24 hours after post-processing.


Young's Modulus after PV1200

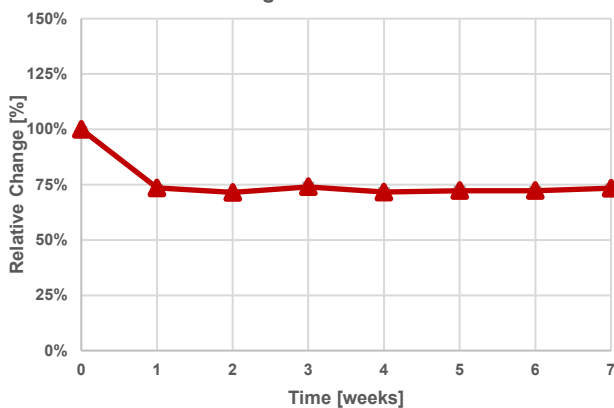

Elongation at Break after PV1200

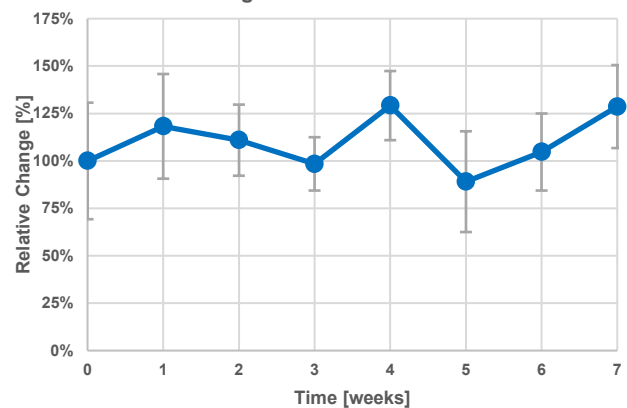

Stress at Break after PV1200

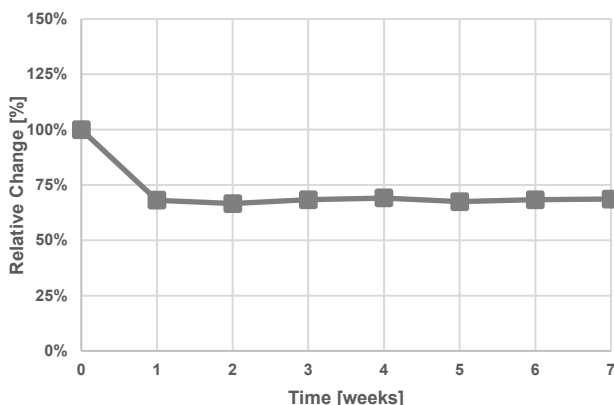

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C

PV1200: Samples were removed from climate chamber during heating phase (Cycle time: 240-300 minutes) and then conditioned for 24 hours at 22°C. 1 Test cycle is equal to 12 hours of test time. "7 weeks" of test time represent 100 test cycles or 1200 hours of test time.


Internal Data Sources:

FOR283110, FOR283128








IND406™ HIGH TEMPERATURE BLACK

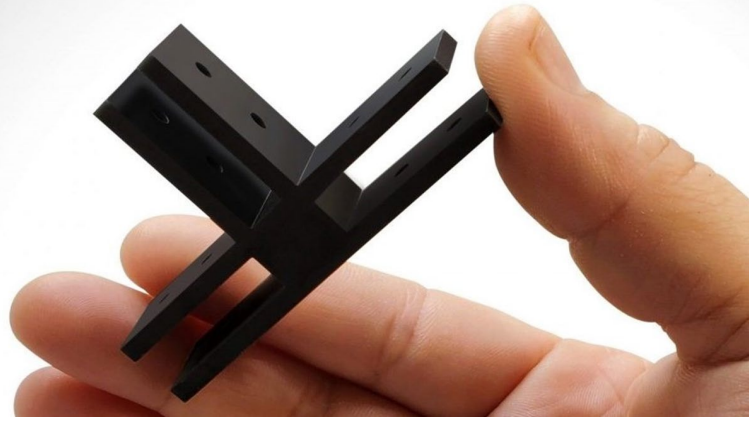

THERMAL INFLUENCE ON MECHANICAL PROPERTIES

LOCTITE 3D IND406 BK has been tested according to ASTM D638 at varied environmental temperatures, from -40°C to 100°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638. Before each test series samples were conditioned for 60 minutes at the specific test temperature.

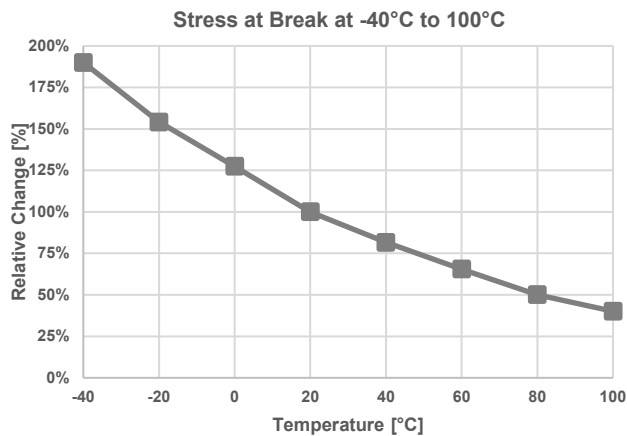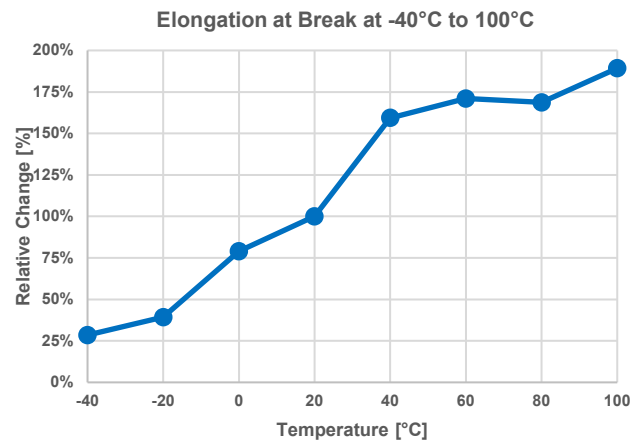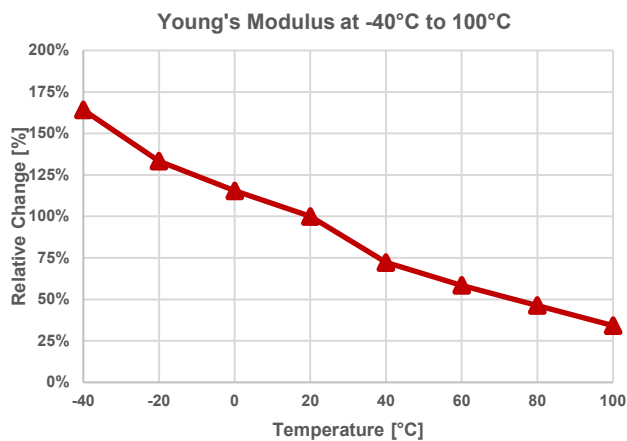


Test parameters:
ASTM D638, Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1% (regression),

Internal Data Sources:
[FOR176910](#)






IND406™ HIGH TEMPERATURE BLACK

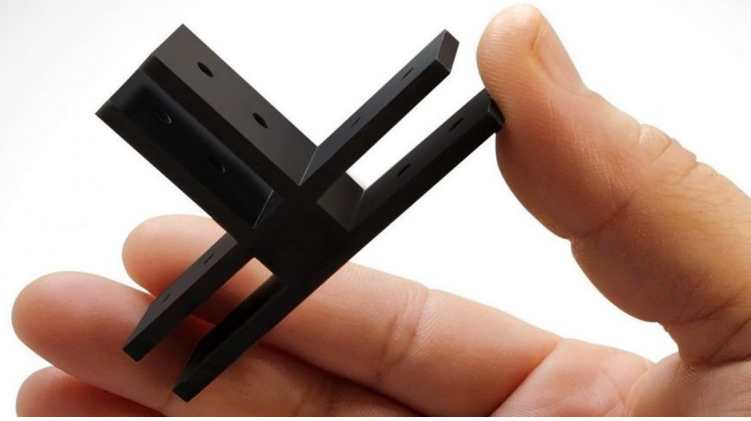


AGEING AND ENVIRONMENTAL EFFECTS – CHEMICAL RESISTANCE INDUSTRIAL

LOCTITE 3D IND406 BK has been tested after chemical ageing according to ASTM D543. The influence of chemicals was tested by measuring mechanical properties after different test times (Immersion test for 24 and 168 hours). Exposed samples were stored in containers and fully immersed in different chemicals. Samples were stirred every 24 hours using a shaker. After removal, exposed samples were washed and conditioned for 24 hours at 22°C before mechanical testing. All samples were printed using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C). The "100%" represents non-aged samples stored at 22°C and tested 24 hours after post-processing.


Young's Modulus after Immersion Time

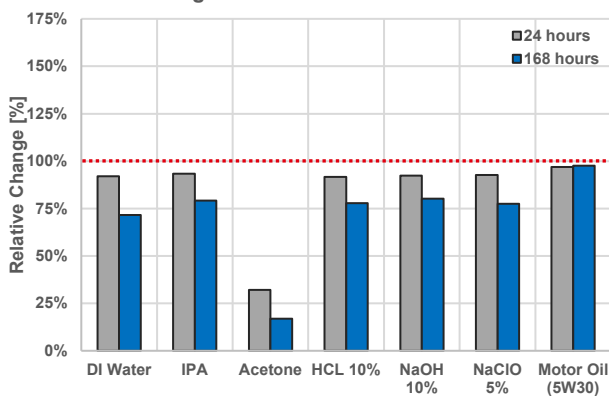

Elongation at Break after Immersion Time

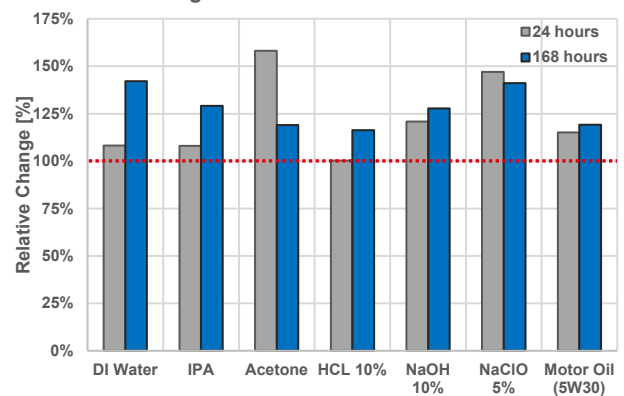

Stress at Break after Immersion Time

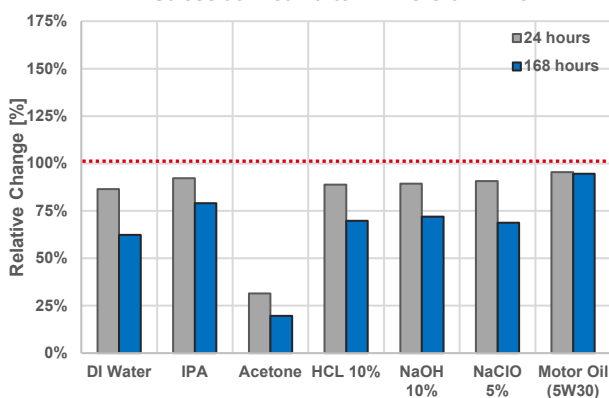

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C
ASTM D543: Samples immersed in different chemicals were stored at 22°C. Samples immersed in Motor Oil were stored at 50°C.
Properties of media used: pH(HCL, 10%) = 1; pH(NaOH, 10%) = 14; pH(NaClO, 5%) = 13


Internal Data Sources:

[DI water] [FOR322675](#), [IPA] [FOR322677](#), [Acetone] [FOR322678](#), [HCL 10 %] [FOR322679](#), [NaOH 10 %] [FOR314425](#), [NaClO 5 %] [FOR314429](#), [5W30] [FOR314430](#).






IND406™ HIGH TEMPERATURE BLACK

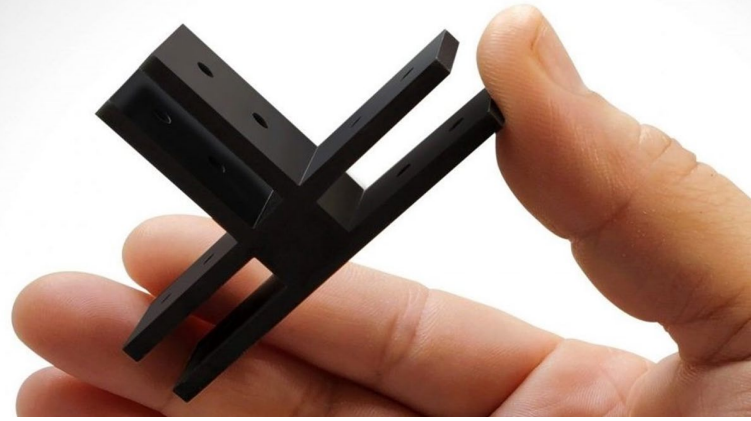


AGEING AND ENVIRONMENTAL EFFECTS – CHEMICAL RESISTANCE AUTOMOTIVE

LOCTITE 3D IND406 BK has been tested after chemical ageing according to ASTM D543. The influence of chemicals was tested by measuring mechanical properties after different test times (Immersion test for 24 and 168 hours). Exposed samples were stored in containers and fully immersed in different chemicals. Samples were stirred every 24 hours using a shaker. After removal, exposed samples were washed and conditioned for 24 hours at 22°C before mechanical testing. All samples were printed using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C). The "100%" represents non-aged samples stored at 22°C and tested 24 hours after post-processing.


Young's Modulus after Immersion Time

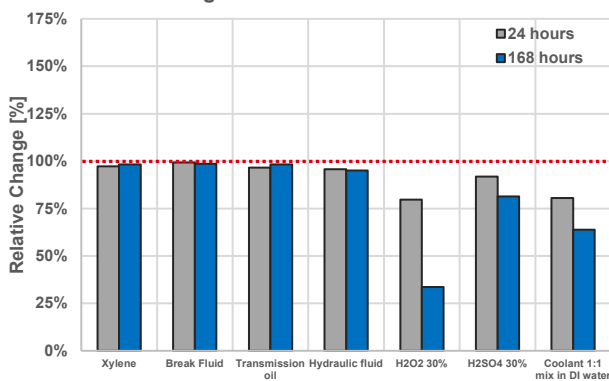

Elongation at Break after Immersion Time

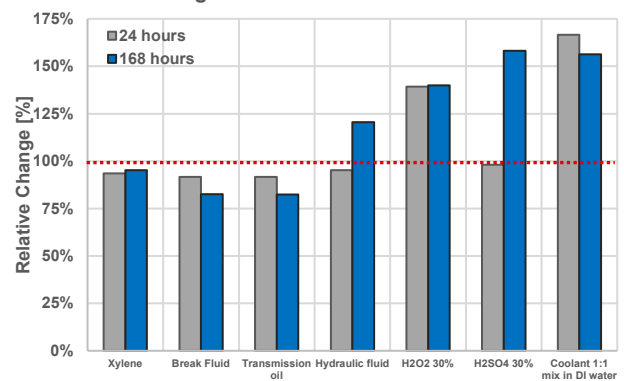

Stress at Break after Immersion Time

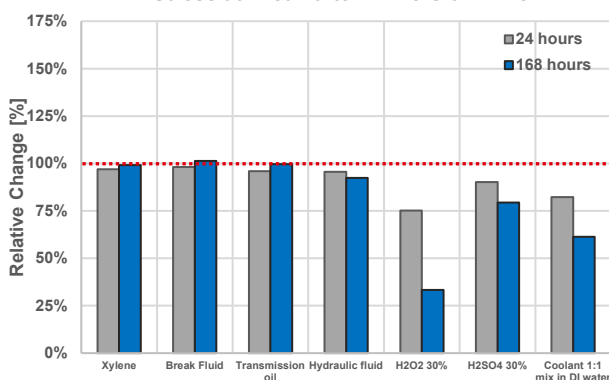

Test parameters:

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C
ASTM D543: Samples immersed in different chemicals were stored at 22°C. Samples immersed in Transmission oil and Coolant mix 1:1 were stored at 50°C.
Properties of media used: pH(H₂SO₄, 30%) = 0; pH(H₂O₂, 30%) = 5; pH (NaCl solution 0.9%) = 5
Viscosity: Hydraulic fluid = 3000 mPas at 40°C; Transmission oil = 8200 mPas at 40°C;
Minimum temperature of coolant mix 1:1 = -40°C


Internal Data Sources:

FOR771771, FOR771773, FOR771775, FOR769314, FOR771778, FOR769374, FOR769375







IND406™ HIGH TEMPERATURE BLACK

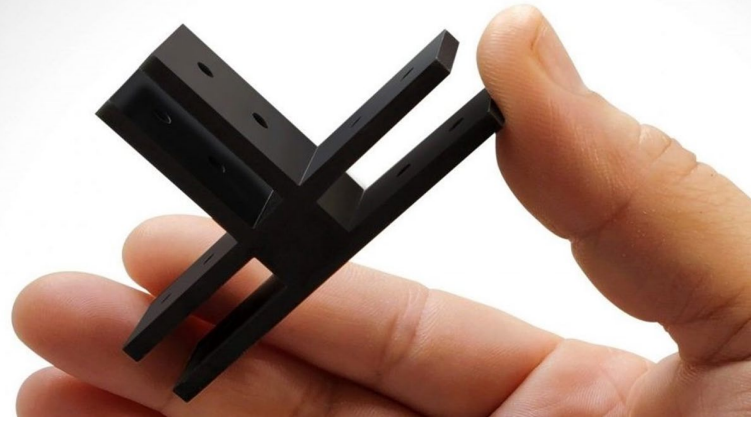

AGEING AND ENVIRONMENTAL EFFECTS – CHEMICAL RESISTANCE MASS SOAK

LOCTITE 3D IND406 BK has been tested after chemical ageing according to ASTM D543. The influence of chemicals was tested by measuring the mass change after different test times (Immersion test for 24 and 168 hours). Exposed samples were stored in containers and fully immersed in different chemicals. Samples were stirred every 24 hours using a shaker. After removal exposed samples were washed, dried and immediately weighed. All samples were printed using a validated workflow.

The 100% value represents the initial weight 24 hours after post-processing.

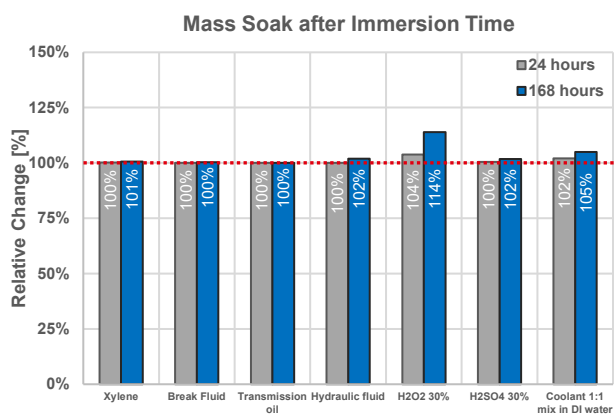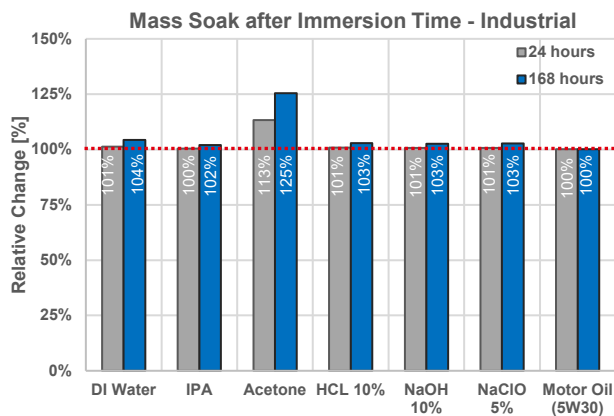

Test parameters:

ASTM D543: Samples immersed in different chemicals were stored at 22°C. Samples immersed in Motor Oil, Transmission Oil and Coolant mix 1:1 were stored at 50°C.
Properties of media used: pH(HCl, 10%) = 1; pH(NaOH 10%) = 14; pH(NaClO 5%) = 13; pH(H₂SO₄ 30%) = 0; pH(H₂O₂ 30%) = 5; pH (NaCl solution 0.9%) = 5
Viscosity: Hydraulic fluid = 3000 mPas at 40°C; Transmission oil = 8200 mPas at 40°C;
Minimum temperature for coolant mix 1:1 = -40°C


Internal Data Sources:

[DI water] FOR322682, [IPA] FOR322687, [Acetone] FOR322694, [HCL 10 %] FOR322695, [NaOH 10%] FOR314434, [NaClO 5 %] FOR314437, [5W30] FOR314439
FOR771771, FOR771773, FOR771775, FOR769314, FOR771778, FOR769374, FOR769375





IND406™ HIGH TEMPERATURE BLACK

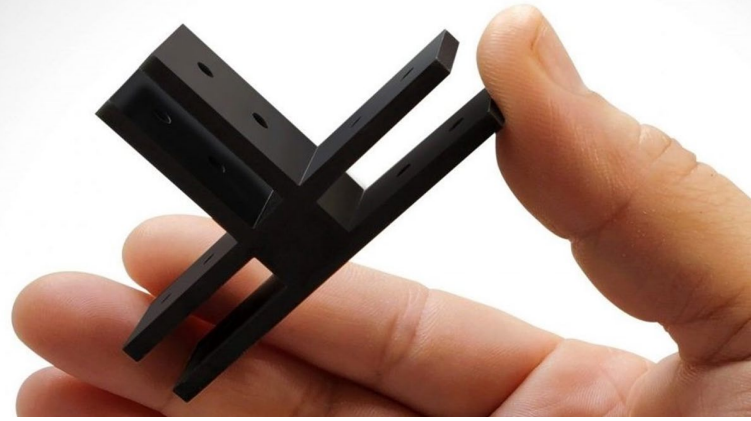


AGEING AND ENVIRONMENTAL EFFECTS – SALT SPRAY EXPOSURE

LOCTITE 3D IND406 BK was aged according to ASTM B117-19. During the test samples were exposed to salt spray at 35°C. After removal from the test chamber, exposed samples were dried, inspected, cleaned using water and wiped dry. Before mechanical testing, samples were conditioned for 24 hours at 22°C. All samples were printed in the same print job using a validated workflow. Mechanical testing was conducted according to ASTM D638 at standard lab conditions (22°C).


Values at '0 weeks' are non-aged samples stored at 22°C and tested after 24 hours of post-processing.

Please note, accelerated weathering testing can never fully represent real outdoor conditions and complexity. It is therefore recommended to conduct additional (outdoor) testing relevant for your specific application needs.


Young's Modulus after Salt Spray at 35°C

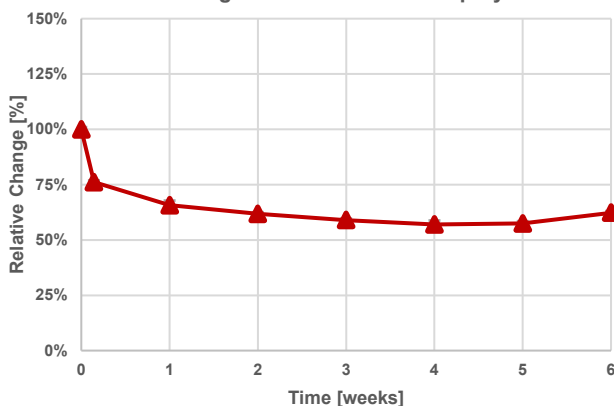

Elongation at Break after Salt Spray at 35°C

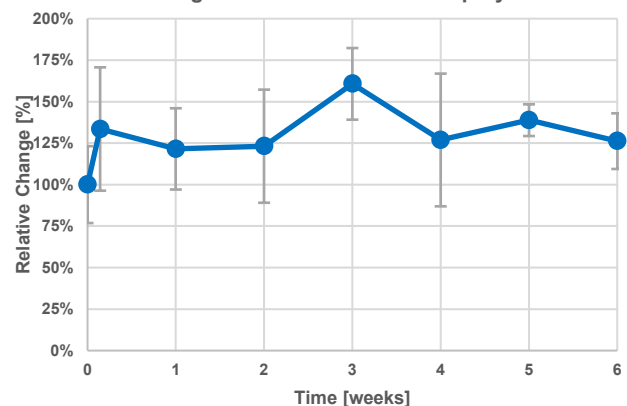

Stress at Break after Salt Spray at 35°C

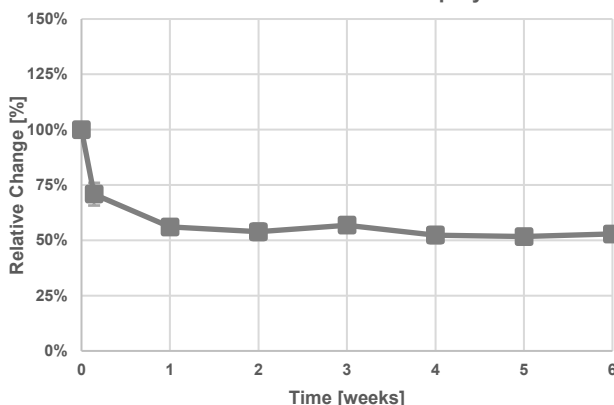

Test parameters:

ASTM B117-19: pH = 6.1; Fog collection = 1.3 ml/h

ASTM D638: Type IV, Pull speed: 5 mm/min, Young's modulus measured at 0.1-1.0% (regression), 22°C


Internal Data Sources:

FOR678340, FOR678341





IND406™ HIGH TEMPERATURE BLACK

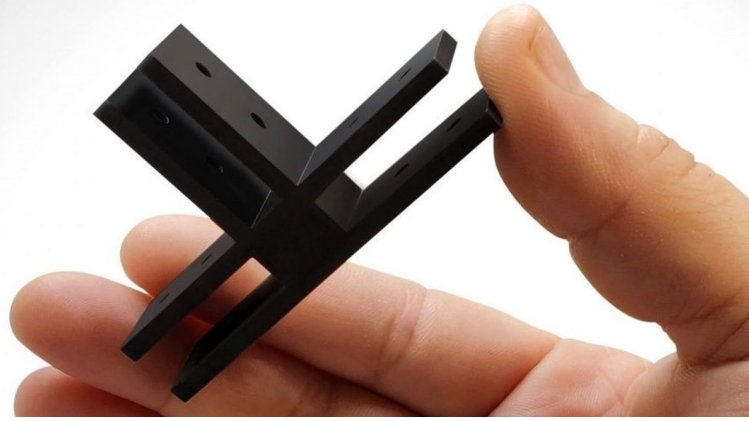


AGEING AND ENVIRONMENTAL EFFECTS – SALT SPRAY EXPOSURE

LOCTITE 3D IND406 BK has been tested after salt spray exposure according to ASTM B117-19. All samples were printed in the same print job using a validated workflow. After removal from the salt spray environment, exposed samples were dried, inspected, cleaned using water, wiped dry and immediately weighed.

The influence of the salt spray was measured by mass change after different exposure times. Samples were weighed after 24 hours and 1 to 6 weeks.

The 100% value represents the initial weight 24 hours after post-processing.

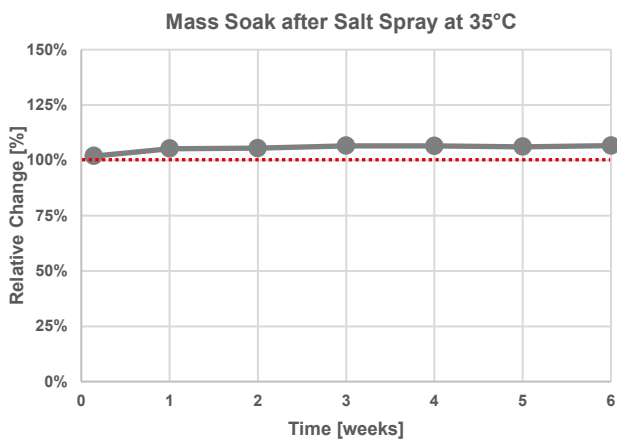


Test parameters:
ASTM B117-19: pH = 6.1; Fog collection = 1.3 ml/h

Internal Data Sources:
[FOR678340](#), [FOR678341](#)





IND406™ HIGH TEMPERATURE

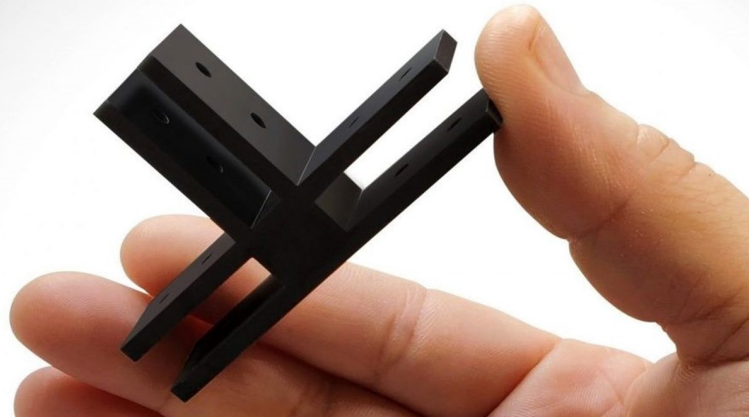

NOTE

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. The product can have a variety of different applications as well as differing application and working conditions in your environment that are beyond our control. Henkel is, therefore, not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Belgium NV, Henkel Electronic Materials NV, Henkel Nederland BV, Henkel Technologies France SAS and Henkel France SA please additionally note the following:

In case Henkel would be nevertheless held liable, on whatever legal ground, Henkel's liability will in no event exceed the amount of the concerned delivery.

In case products are delivered by Henkel Colombiana, S.A.S. the following disclaimer is applicable:

The information provided in this Technical Data Sheet (TDS) including the recommendations for use and application of the product are based on our knowledge and experience of the product as at the date of this TDS. Henkel is not liable for the suitability of our product for the production processes and conditions in respect of which you use them, as well as the intended applications and results. We strongly recommend that you carry out your own prior trials to confirm such suitability of our product.

Any liability in respect of the information in the Technical Data Sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in relation to death or personal injury caused by our negligence and any liability under any applicable mandatory product liability law.

In case products are delivered by Henkel Corporation, Resin Technology Group, Inc., or Henkel Canada, Inc. the following disclaimer is applicable:

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of **Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits.** The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark Usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.



LOCTITE®



FIND OUT MORE AT
LOCTITEAM.COM

LOCTITE®
Henkel Corporation
loctite3d@henkel.com



Version 2025/03/28