

EQ CA Handheld Dispenser

IDH 3139627

PRODUCT DESCRIPTION

The LOCTITE® EQ Cyanoacrylate “CA” Handheld Dispenser can be used to manually dispense LOCTITE® instant adhesives packaged in 20g or 1oz bottles. The ergonomic design allows the user to deliver a drop of adhesive by pulling the trigger. The bottles can be loaded from the back of the hand pump. The bottle cap can be removed or installed while the bottle is inside the hand pump. This prevents accidental spills of the adhesive. The hand pump can be rested on its back in between uses to prevent spills or leaks. The LOCTITE® CA Handheld Dispenser enables more accurate and consistent application while eliminating waste and mess with the use of appropriate dispense tips. The appropriate dispense tips need to be selected based on the viscosity of the adhesive and end-use application for optimal performance.



PRODUCT FEATURES:

- No assembly required
- Compatible with all 20g/1oz LOCTITE® cyanoacrylate and light cure cyanoacrylate adhesive bottles.
- Side viewing window enables adhesive level monitoring within LOCTITE® bottles.

BENEFITS:

- Easy to use
- Minimizes effort to dispense LOCTITE® cyanoacrylates from 20g/1oz bottles
- Eliminates spills, waste, and mess

TECHNICAL DATA:

- | | |
|------------------------------|---|
| - Total weight: | 150 grams (5.3 oz.) |
| - Dimensions (W x H x D): | 101.6 x 139.3 x 52.2 mm (4.0 x 5.5 x 2.1 in) |
| - Suggested Viscosity Range: | Low to medium |
| - Fluid Compatibility: | LOCTITE® Cyanoacrylates and Light Cure Cyanoacrylates |


ITEMS SUPPLIED:

- LOCTITE® CA Hand Pump
- Tapered Dispense Tips

EQ CA Handheld Dispenser

IDH 3139627

DIMENSIONS:

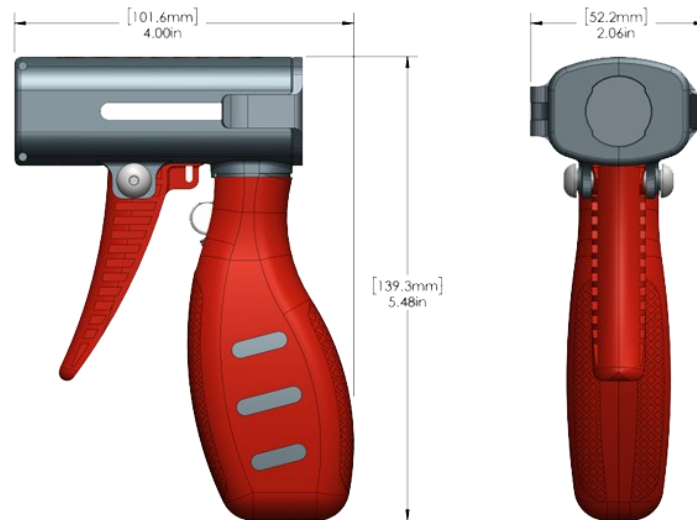

ADDITIONAL INFO:

- The EQ CA Handpump can be rested on its back in between uses. For prolonged storage or replacing the bottle, it is recommended to put the cap back on the bottle.



Note

The data contained herein are furnished for information only and are believed to be reliable. We cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Henkel Corporation specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Henkel Corporation's products. Henkel Corporation specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Henkel Corporation patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.

Trademark usage

Except as otherwise noted, all trademarks in this document are trademarks of Henkel Corporation in the U.S. and elsewhere. ® denotes a trademark registered in the U.S. Patent and Trademark Office.

Document #: 9062800, -