




## Cured in a FLASH

### Introducing **NEW** Flexible and Toughened Flashcure Adhesives

Henkel Corporation has revolutionized the adhesive industry with **LOCTITE Flashcure Light Curing Cyanoacrylates**. This unique technology allows these single-component adhesives to cure in seconds when exposed to light at the appropriate wavelength and provides superior adhesion to a wide variety of substrates. With its secondary shadow cure mechanism, Flashcure technology provides all the benefits of light cure acrylic and cyanoacrylate technologies with none of the limitations.

### FEATURES AND BENEFITS

- Extremely **fast tack-free** curing in 2-5 seconds
- Cures with **UV/visible** light AND in **shadowed** areas
- **Fluorescent** for inspection purposes
- Eliminates need for accelerators
- **Good adhesion** to plastics, elastomers and metals
- ISO 10993 **Biological Tested**

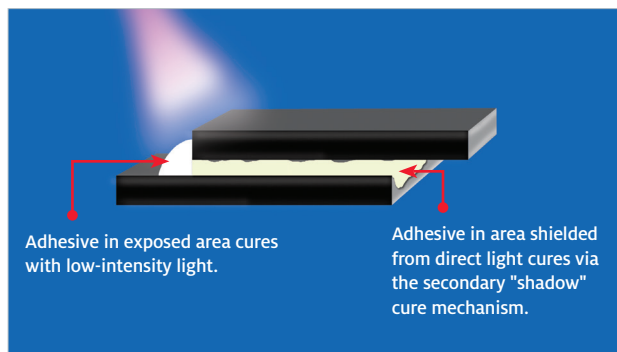

To learn more about Henkel's newest innovations, visit [www.henkel-adhesives.com](http://www.henkel-adhesives.com)



A new flexible formula, **LOCTITE 4314**, has been added to Henkel's unique line of Flashcure® dual cure adhesives, specifically designed for bonding flexible or soft substrates.

The toughened Flashcure products (**LOCTITE 4310 and 4311**) offer all of the benefits of the traditional technology with the added benefits of impact resistance and fracture toughness.

**LOCTITE 4306**, one of the original Flashcure adhesives from Henkel, offers a low viscosity for tight fitting parts or small assembly gaps.

PERFORMANCE DATA	TRADITIONAL	TOUGHENED		FLEXIBLE
	4306	4310	4311	4314
Color	Clear to pale green	Clear to pale green	Clear to pale green	Clear to pale green
Fluorescence	Yes	Yes	Yes	Yes
Gap Fill	3.048 mm	3.048 mm	3.048 mm	3.048 mm
Viscosity	20 cP	150 cP	900 cP	175 cP
Block Shear Strength	15.2 N/mm <sup>2</sup>	21.99 N/mm <sup>2</sup>	21.99 N/mm <sup>2</sup>	16.55 N/mm <sup>2</sup>
Fixture Speed	5 sec.	5 sec.	5 sec.	5 sec.
Tensile Strength (bulk adhesive)	32.54 N/mm <sup>2</sup>	33.37 N/mm <sup>2</sup>	33.37 N/mm <sup>2</sup>	24.13 N/mm <sup>2</sup>
180 Peel (steel)	2.10 N/mm	2.45 N/mm	2.98 N/mm	N/A
Side Impact	8 J	13 J	14 J	N/A
Fracture Toughness (steel, 5mm gap)	0 J/m <sup>2</sup>	880 J/m <sup>2</sup>	840 J/m <sup>2</sup>	N/A
Temperature Range	-54°C to 82°C	-54°C to 82°C	-54°C to 82°C	-54°C to 82°C

ORDERING INFORMATION	TRADITIONAL	TOUGHENED		FLEXIBLE
	4306	4310	4311	4314
28 g bottle	Availability may vary by country. Contact us for ordering information.			2733652
454 g bottle				2730030



### Dispensing

LOCTITE Flashcure Light Cure Adhesives can be dispensed manually or with LOCTITE dispensing systems.



### Curing

LOCTITE Flashcure Light Cure Adhesives can be cured with low-intensity UV or visible light. Henkel's newest LED curing units are ideally suited for a rapid, tack-free cure of all Flashcure adhesives.

### Difficult Bonding Applications

For difficult-to-bond substrates such as polyethylene and polypropylene, use LOCTITE Flashcure Light Cure Adhesives with LOCTITE Polyolefin Primers.

#### REGIONAL HEADQUARTERS

##### EUROPE, INDIA, MIDDLE EAST, AFRICA

Henkel AG & Co. KGaA  
Henkelstraße 67  
40589 Düsseldorf  
Germany  
Tel: +49.211.7970  
Tel: +49.211.4008

##### ASIA-PACIFIC

Henkel (China) Investment Co., Ltd.  
Building 7, The Spring Center  
No. 99 Jiang Wan Cheng Road  
Yang Pu District  
Shanghai 200438  
China  
Tel: +86.21.2891.8000  
Tel: +86.21.5509.9552

