

EASYFELT F

Fibre reinforced oxidized bituminous waterproofing membrane

TDS_Ceresit_BT 73F_GCC_0911

EASYFELT F is a fibre reinforced bituminous waterproofing membrane, manufactured from a mixture of oxidized bitumen. The bituminous compound exhibits high heat and UV stability.

CHARACTERISTICS

- ▶ Excellent resistance to positive water & vapor pressure
- ▶ Good dimensional stability under tension
- ▶ Resistant to water borne chemicals

FIELDS OF APPLICATION

EASYFELT F is designed to be used for non critical structures like Villas & small buildings for the following areas:

- ▶ Roofs, terraces and balconies

APPLICATION

Surface preparation

Clean all surfaces thoroughly of all contaminants like dust, traces of curing compound, oil, grease.

Priming

Apply **POLYPRIME SB** (Solvent based primer) @ 4-6 m²/lt. by brush, roller or spray. Allow the primer to dry prior to the application of the membrane.

Application

Easyfelt F membranes are installed by using a cylinder fed propane gas torch. Heat is applied to both the roll and the exposed laps of the membrane being overlapped onto.


Caution: Do not over torch the membrane as this will expose the reinforcement and cause damage to it.

Sealing

Heat both the overlaps and use round tipped trowel to seal the overlap.

Up stand

An appropriate flashing membrane shall be lapped with the base membrane and taken up on the parapet wall and tucked into a groove cut into the concrete. The grooves will be sealed with a suitable mastic.

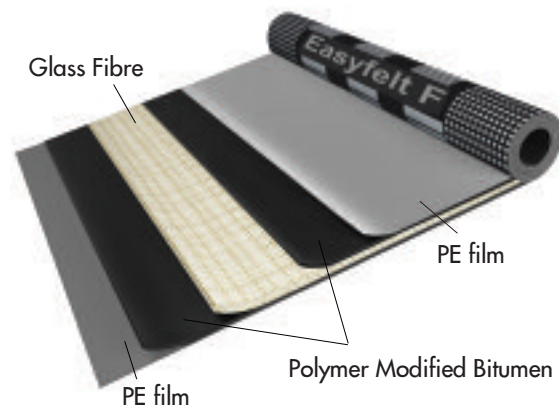

For illustration Purpose only

STORAGE

Easyfelt F membranes have to be stored vertically in a covered area and protected from UV and sunlight and should not be stacked on top of one another.

HEALTH & SAFETY

Easyfelt F membranes contain a tacky bitumen compound which when applied can stick to human skin. Such stains can be removed by using a cloth dipped in suitable cleaner. In case the bitumen gets stuck to a sensitive area it is advised to get medical attention.

TECHNICAL SPECIFICATION

PROPERTIES	VALUES
Thickness, mm	3.0 /4.0
Mass per unit area, kg/m ²	3.1-.3.3 / 4.1-4.3
Reinforcement (Fibre), g/m ²	50
Coating Asphalt	Oxidized Asphalt
Softening Point (R&B), °C	>105
Penetration at 25°C, 0.1mm	10-20
Heat Resistance at 70°C	No Flow
Resistance to Aging	No Deterioration

in accordance with the standard 5-20% variation expected

SUPPLY

Easyfelt F	3mm	1m x 10m,	wt 31 kg
	4mm	1m x 10m,	wt 41 kg
POLYPRIME SB		15 lt., & 20 lt.	

2

Apart from the information given here it is also important to observe the relevant guidelines and regulations of various organisations and trade associations as well as the respective standards. The aforementioned characteristics are based on practical experience and applied testing. Warranted properties and possible uses which go beyond those warranted in this information sheet require our written confirmation. All data given was obtained at an ambient and material temperature of +23°C and 50 % relative air humidity unless specified otherwise. Please note that under other climatic conditions hardening can be accelerated or delayed.

The information contained herein, particularly recommendations for the handling and use of our products, is based on our professional experience. As materials and conditions may vary with each intended application, and thus are beyond our sphere of influence, we strongly recommend that in each case sufficient tests are conducted to check the suitability of our products for their intended use. Legal liability cannot be accepted on the basis of the contents of this data sheet or any verbal advice given, unless there is a case of wilful misconduct or gross negligence on our part. This technical data sheet supersedes all previous editions relevant to this product.

Manufactured in G.C.C.



Henkel Polybit Industries Ltd.
P.O. Box 48539, Sharjah, United Arab Emirates
Sales Tel: +971 6 572 2282, Fax: +971 6 572 2289
Factory Tel: +971 6 767 0777, Fax: +971 6 767 1669

Henkel Polybit Industries Ltd.(Branch)
P.O. Box 2230, Al Khobar 31952, K.S.A
Tel: +9663 8894110, Fax: +9663 8995313

Internet: www.henkelpolybit.com E-mail: polybit@henkelpolybit.com



Quality for Professionals