

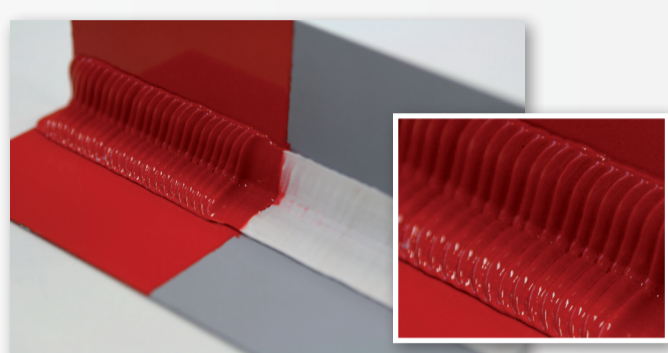



FOGTÄTNING

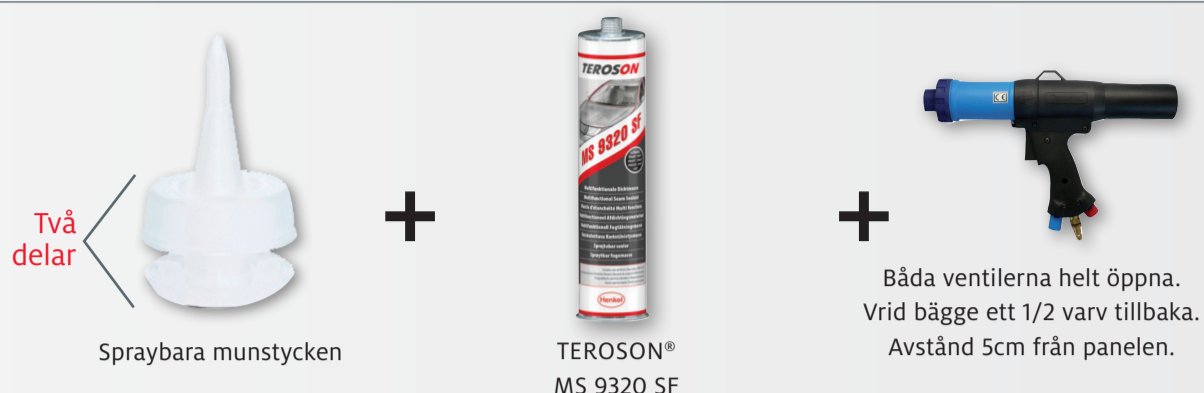







LJUDDÄMPNING

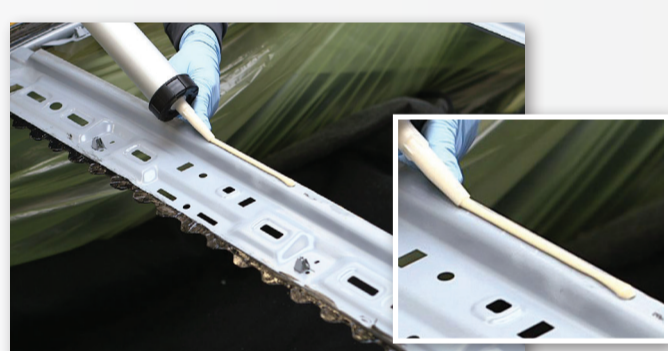

UNDERREDDSSKYDD

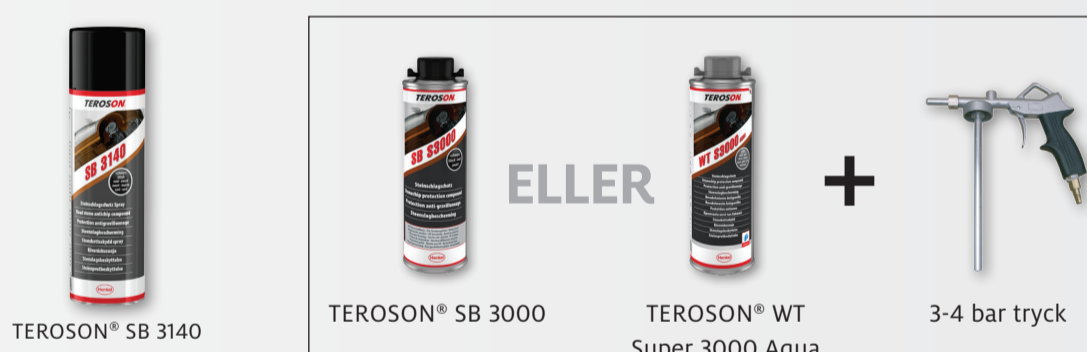

ORDERINFORMATION

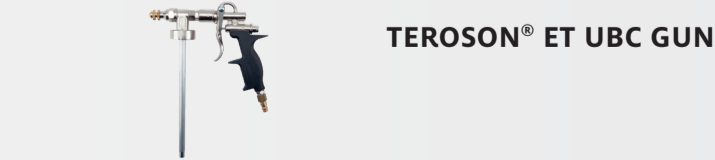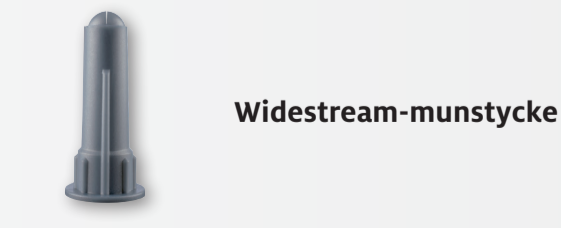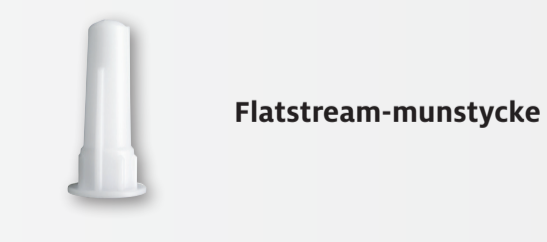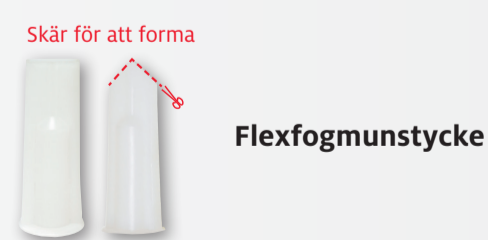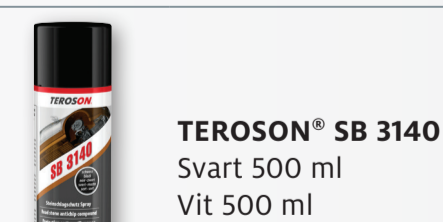

1 Bar = 15 PSI

teroson.se

The data contained herein are intended as reference only. Please consult Henkel Technical Support Group for assistance and recommendation on specifications for these products. Except as otherwise noted, all marks used above in this printed material are trademarks and/or registered trademarks of Henkel and/or its affiliates in US, Germany, and elsewhere.

© Henkel AG & Co. KGaA, 2023

Henkel Norden AB
Gustavslundsvägen 151A
Box 151 22
167 15 Bromma
Tel: +46-10-480-7500

Henkel