



LOCTITE® AA 5885

1k Polyacrylate Cured-In-Place Gasket for sealing electronic units & actuators



CUSTOMER NEEDS

- Gasketing solution to seal electronic control unit (ECU) for **Electronic Braking System (EBS), Transmission Control Units (TCU), and Traction Control Modules** and others x-by-wire component systems
- **Non-silicone** and **fast processing**
- Flexible gasket to **mitigate** against **deflection** and **deformation**
- Required **seal integrity** during in-line **pressure** testing, high pressure **water spray** and **long term exposure to ATF**



HENKEL SOLUTIONS

- **1K, rapid (< 30 sec)** UV curing polyacrylate Cured-In-Place Gasketing (CIPG) solution
- Maintains a **uniform sealing force** across broad service temperature range
- Offers **excellent compression** set performance
- High **temperature performance** for underhood applications **up to 150°C**

CONTACT US TO LEARN MORE

Europe
Germany
Henkel AG & Co. KGaA (Headquarters)
Henkelstraße 67
40589 Düsseldorf
Phone: +49 211 797-0

Asia-Pacific
China
Henkel (China) Investment Co., Ltd.
Building 7 & Building 6 (5F-6F),
The Springs Center
No.99 Jiang Wan Cheng Road
Yang Pu District, Shanghai 200438
Phone: +86 21 2891 8000


Americas
USA
Henkel Corporation
Madison Heights 32100 Stephenson
Highway
Madison Heights, MI 48071
Phone: +1 248 583 9300



Henkel Adhesive Technologies



ELECTRONIC BRAKING SYSTEM

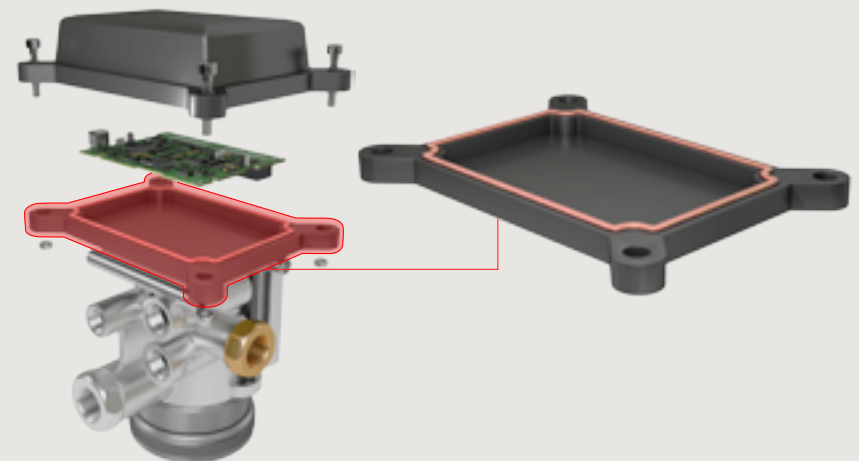

www.henkel-adhesives.com



The information provided herein, especially recommendations for the usage and the application of our products, is based upon our knowledge and experience. Due to different materials used as well as to varying working conditions beyond our control we strictly recommend to carry out intensive trials to test the suitability of our products with regard to the required processes and applications. We do not accept any liability with regard to the above information or with regard to any verbal recommendation, except for cases where we are liable of gross negligence or false intention. The information is protected by copyright. In particular, any reproductions, adaptations, translations, storage and processing in other media, including storage or processing by electronic means, enjoy copyright protection. Any exploitation in whole or in part thereof shall require the prior written consent of Henkel AG & Co. KGaA. Except as otherwise noted, all marks used in this document are trademarks and/or registered trademarks of Henkel and/or its affiliates in the US, Germany, and elsewhere.
© Henkel AG & Co. KGaA, 2025