



# LOCTITE® 648

## ANAEROBIC RETAINING COMPOUND


Room temperature curing retaining compound for bonding of cylindrical fitting parts like bearings, sprockets and gears onto shafts, including rotors onto electric motor shafts. The material provides high resistance to dynamic loads and can even reduce premature failure of spline assemblies by unitizing the assembly. This product cures when confined between close fitting metal surfaces in the absence of air.



### Benefits

- High temperature resistance
  - › Service temperature from -55 - 180°C
- High strength
  - › Shear strength >27 N/mm<sup>2</sup> (3900 psi) on steel
- Suitable for passive substrates such as stainless steel and plated surfaces
- Works on slightly oily surfaces with lubrication, anti-corrosion, and protection fluids
- Low viscosity
  - › 500.0 mPa.s (cP)
- Resistant to oils, gasoline, brake fluids

Henkel

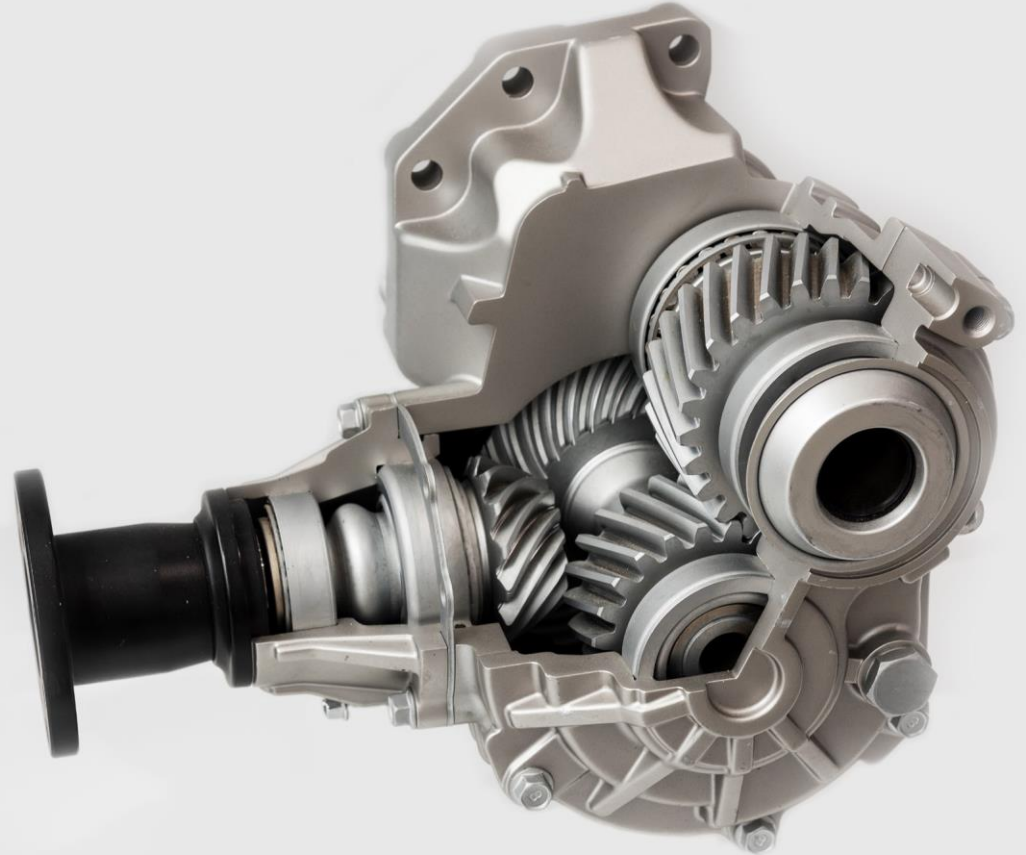



## Areas of application

### Transmission, gearbox, electric motors

- Bearings, sprockets and gears on shafts
- Rotors on electric motor shafts
- Spline assemblies

## Performance Characteristics



Outstanding strength and resistance enables more compact and lighter design of gears and drivetrain components without compromising performance or durability

## Technical Data

Product family	Anaerobic acrylic
Color	Green
Fluorescence	Positive under UV light
Viscosity (Brookfield) at 25°C (mPa·s)	500
Compressive Shear Strength (N/mm <sup>2</sup> ), ISO 10123	≥ 27 (Steel, Stainless Steel)
Compressive Shear Strength (N/mm <sup>2</sup> ), ISO 10123	18 (Aluminum)
Operating temperature (°C)	Up to 180

CONTACT US TO LEARN MORE

**Europe**  
Germany  
Henkel AG & Co. KGaA (Headquarters)  
Henkelstraße 67, 40589 Düsseldorf

**Asia-Pacific**  
China  
Henkel (China) Co., Ltd.  
No. 928 Zhangheng Road, Pudong New District  
201203 Shanghai

**Americas**  
U.S.A.  
Henkel Corporation  
Madison Heights, 32100 Stephenson Highway  
Madison Heights, MI 48071



The data contained herein is intended as reference only. Some products / package sizes may not be available in your country or may have a lead time. Please contact your local Henkel subsidiary for assistance and recommendation on specifications and applications of these products. © designates a trademark of Henkel AG & Co. KGaA or its affiliates, registered in Germany and elsewhere © Henkel AG & Co. KGaA, 2022 DSGN0022136 (7/2022)

