




TECHNICAL DATA SHEET

Revision: February 7, 2020
Supersedes: June 24, 2015
Ref. #: 379047 / 649735

HIGH STRENGTH POLYURETHANE SUBFLOOR ADHESIVE

SF450+ POLYURETHANE

2X STRENGTH AND COVERAGE

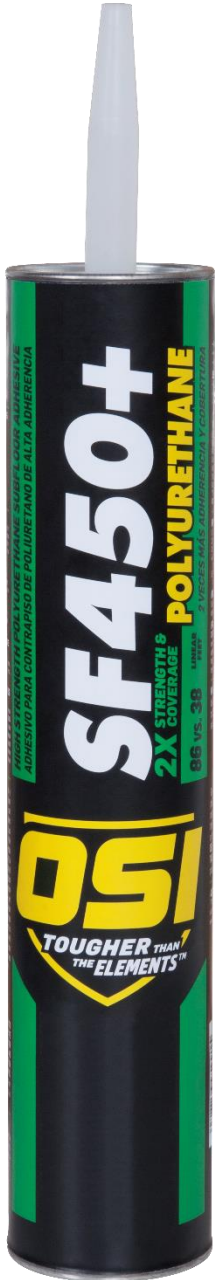

DESCRIPTION

OSI® SF450+ Polyurethane Subfloor Adhesive is a one component, polyurethane based, moisture-curing adhesive. It is VOC compliant and contains no chlorinated solvents or water. It offers superior adhesion to most building substrates, providing 2x strength than normal subfloor adhesives. When using the pre-cut 1/4" nozzle, it provides twice the coverage. SF450+ Polyurethane forms a permanent durable bond even when applied to wet, frozen or treated lumber. This low VOC formulation can be used for both interior and exterior jobs and meets stringent State and Federal VOC regulations.

Available As:

Item #	Package	Size
1943974	Paper Cartridge	28 fl. oz. (828 mL)
2569440 **	** California compliant	** Available March 1, 2020

FEATURES & BENEFITS

- 2X Stronger than Ordinary Subfloor Adhesives
- 1/4" Pre-Cut Nozzle Provides 2X the Coverage
- Bridges Minor Gaps in Framing
- Adheres to Wet, Frozen and Treated Lumber
- Helps Reduce Squeaky Floors
- Meets and exceeds ASTM D3498 requirements
- Non-shrinking

RECOMMENDED FOR

OSI SF450+ Polyurethane can be used in most interior and exterior construction projects. Primarily designed for on-site bonding of subfloor, OSB or plywood decking to joists during cold weather. It bonds all wood to wood assemblies dry, wet or frozen. Bonds to a wide variety of common construction materials such as wood, plywood, OSB, MDF, concrete, masonry, brick, stone *, foambord insulation including EPS (expanded polystyrene foam), XPS (extruded polystyrene foam), and polyiso (urethane) foam, certain metals, cement-based products, fiber cement panels, ceramic, rigid fiberglass, drywall, rigid and cellular vinyl/PVC trim and molding and polyash trim. Testing is recommended prior to starting any project.

LIMITATIONS

- Not suitable for water submersion applications or Marine Applications
- Gaps that are greater than 0.060 inches will require a larger bead of adhesive
- There are a wide variety of treatments for wood that can affect adhesive performance, an adhesion test is suggested prior to full application
- Tub surrounds and other solid sheet goods made from rigid polystyrene
- Polyethylene, polypropylene, polytetrafluoroethylene (PTFE), and flexible vinyl (FPVC)
- Polyethylene (PE) films that cover certain XPS or EPS foam insulation boards
- Bitumen coated surfaces
- Certain natural stone* such as limestone, travertine, sandstone will have bonding difficulties
- Some materials such as rubbers and plastics may have bonding difficulties. Test before use.
- Composite decking and Ipe wood materials
- Flexible sheet goods
- Areas of high heat such as around fireplace openings or for fire pit construction
- Pressure treated lumber must be well seasoned for at least 6 months in weather exposure

COVERAGE

For a 28-fl. oz. (828 ml) cartridge:

• A 1/4" (6 mm) bead extrudes approximately 86 ft. (26 m)

• A 3/8" (9.5 mm) bead extrudes approximately 38 ft. (12 m)



TECHNICAL DATA SHEET

Revision: February 7, 2020
 Supersedes: June 24, 2015
 Ref. #: 379047 / 649735

TECHNICAL DATA

Typical Uncured Physical Properties:		Typical Application Properties	
<u>Color:</u>	Tan	<u>Application Temperature:</u>	Adhesive should be above 41°F (5°C) and below 95°F (35°C) for optimal performance. (See Cold Weather Application)
<u>Appearance:</u>	Thick paste	<u>Odor:</u>	Aromatic / Minimal
<u>Base:</u>	Polyurethane Formaldehyde / Asbestos free	<u>Open Time:</u>	15-20 minutes* at 78°F (25°C) and 50% RH
<u>Viscosity:</u>	555,000 cps	<u>Repositioning Time:</u>	30-45 minutes* at 78°F (25°C) and 50% RH
<u>Specific Gravity:</u>	1.3	<u>Clamping Time:</u>	24 hours
<u>VOC Content:</u>	<3% by weight (CARB) 76 g/L (SCAQMD)	<u>Cure Time**:</u>	24 to 48 hours* at 78°F (25°C) and 50% RH *Time is dependent upon temperature, humidity, porosity of substrate and amount of adhesive used
<u>VOC Content: **</u>	2.3% by weight (CARB) 65 g/L (SCAQMD)	<u>Clean Up:</u>	Clean up uncured adhesive residue with mineral spirits. Scrape away cured adhesive using a sharp-edged tool.
** California compliant			
<u>Shelf Life:</u>	12 months from date of manufacture (unopened)		
<u>Lot Code Explanation:</u>	HE9038R302 9 = Last Digit of Year of Manufacture 038 = Day of Manufacture based on 365 days per year For example: 9038 = February 7, 2019		

* Time is dependent upon temperature, humidity, porosity of substrate and amount of adhesive used

** Cure time is significantly increased in cold temperatures and/or low humidity conditions

Typical Cured Performance Properties

<u>Color:</u>	Tan	<u>Water Resistance:</u>	Yes
<u>Cured form:</u>	Non-flammable, rubbery solid	<u>Applicable Specifications:</u>	<ul style="list-style-type: none"> ▪ ASTM D 3498 ▪ APA AFG-01 ▪ ASTM C 557
<u>Service Temperature:</u>	-40°F (-40°C) to 160°F (71°C)		

<u>Compression Shear Strength, ASTM D3498:</u> Douglas Fir to Douglas Fir plywood		<u>Compression Shear Strength to Various Substrates:</u>	
Dry Lumber Bonding	638 psi (4.4 N/mm ²)	OSB to expanded cellular PVC (24-hour cure)	263 psi (1.8 N/mm ²) Wood failure
Wet Lumber Bonding	404 psi (2.8 N/mm ²)	PVC trim molding to pine (24-hour cure)	305 psi (2.1 N/mm ²)
Frozen Lumber Bonding	773 psi (5.3 N/mm ²)	Fiber cement to Douglas Fir plywood (7-day cure)	305 psi (2.1 N/mm ²) Substrate failure
Gap Filling	468 psi (3.2 N/mm ²)	Fiber cement to Douglas Fir plywood (14-day cure followed by water immersion and drying)	377 psi (2.6 N/mm ²) Wood failure
Moisture Resistance	585 psi (4.0 N/mm ²) no delamination		
<u>Bond Strength Development* @ 73°F (23°C):</u> Douglas Fir to Douglas Fir plywood		<u>Stone Bonding: Compression Shear Strength:</u>	
6 hours cure	208 psi (1.4 N/mm ²)	Granite (unpolished) to Douglas fir plywood (7-day cure)	467 psi (3.2 N/mm ²)
8 hours cure	279 psi (1.9 N/mm ²)	Marble (unpolished) to Douglas fir plywood (7-day cure)	542 psi (3.7 N/mm ²)
16 hours cure	450 psi (3.1 N/mm ²)	Granite to Granite (unpolished), 7-day cure followed by 24 hours water immersion	371 psi (2.6 N/mm ²)
24 hours cure	542 psi (3.6 N/mm ²)	Marble to Marble (unpolished), 7-day cure followed by 24 hours water immersion	305 psi (2.1 N/mm ²)



TECHNICAL DATA SHEET

Revision: February 7, 2020
Supersedes: June 24, 2015
Ref. #: 379047 / 649735

TECHNICAL DATA

Tensile Shear Strength (Lap Shear Strength):

Douglas Fir Plywood to stainless steel	590 psi (4.1 N/mm ²) - Wood failure
Douglas Fir Plywood to hot galvanized steel	512 psi (3.5 N/mm ²) - Wood failure

Compression Shear Strength, APA AFG-01: (Bond area = 1.5 in²)

	Douglas Fir to Douglas Fir plywood	Southern Yellow Pine to Southern Yellow Pine
Dry Lumber Bonding	890 lbs.	No data
Wet Lumber Bonding	785 lbs.	593 lbs.
Frozen Lumber Bonding	837 lbs.	762 lbs.
Moisture Resistance	911 lbs.	No data
Oxidation Resistance	Passed	Passed

DIRECTIONS

Tools Typically Required:

Utility knife, caulking gun, tool to puncture cartridge seal, plant mister bottle containing water.

Safety Precautions:

Wear gloves to avoid skin contact. Cured adhesive on bare skin will not come off immediately with washing and may cause skin to darken. Cured adhesive and discoloration will come off of skin in about 3 days.

Preparation:

To ensure positive adhesion it is recommended to use adhesive above 41°F (5°C). For easier application, ensure the product temperature is 59°F (15°C) or higher. Surfaces must be clean and free of frost, standing water, grease, dust and other contaminants. Pre-fit all materials and protect finished surfaces. Cut nozzle at a 45° angle to required opening, usually ¼ inch or wider. Puncture the inner seal of the cartridge. The foil seal must be completely opened using a tool of similar size as the opening. Be very careful not to allow SF450+ PU to cure on a finished surface.

Cold Weather Use:

Cold Weather application is possible down to 19°F (-7°C) ambient conditions. Adhesive product must be kept above 45°F (7°C) during application and all bonding surfaces must be free of snow, ice and frost prior to use. Cold weather conditions will slow cure times.

General Application:

Apply adhesive to one surface of the material being bonded. Press the surfaces firmly together within 15 to 20 minutes. Materials may be repositioned within 30 to 45 minutes after applying the adhesive. If bonding two non-porous surfaces (such as foam, metal or rigid fiberglass) or under very dry conditions (less than 30% relative humidity), add water in the form of a very light or atomized spray from a plant mister bottle to the extruded adhesive. Follow same procedure if bonding large size sheet goods. The repositioning time will then be reduced to less than 15 minutes. Use mechanical support for 24 hours while the adhesive cures. Cure time is dependent upon temperature, humidity, porosity of substrate and amount of adhesive used. Low temperature and humidity will slow cure time. When bonding EPS and XPS foam insulation, avoid cure and surface temperatures above 90°F (32°C) as this may cause cavitation of the foam. User is responsible for determining suitable and acceptable results for their intended project. Test before use.

Sub Floor Installations:

Apply a continuous line of adhesive (1/4" thickness minimum but not greater than 3/8") to joists/framing members, or a serpentine pattern to wide areas; and a continuous or spaced line of adhesive (1/8" thick minimum) in groove of tongue-and-groove panels. Apply enough adhesive to install ONLY one or two panels at a time depending upon prevailing conditions. Each panel must be positioned and fastened in place within 15 minutes of applying adhesive to ensure maximum bond before proceeding to the next. Follow APA Glued Floor System guide for detailed gluing and fastening schedules for the type of floor being installed.

Clean-up:

Clean tools and adhesive residue immediately with mineral spirits. SF450+ Polyurethane Adhesive can be removed mechanically once cured. Solvents have little to no effect on cured adhesive.

STORAGE & DISPOSAL

Not damaged by freezing. Store product at standard conditions which are defined as 72°F ± 4°F (22°C ± 2°C) and <50% relative humidity. After completion of work, seal cartridge nozzle tightly with aluminum foil. Wrap the foil tightly around the nozzle and seal it with tape. Applying petroleum jelly around the opening before sealing with aluminum foil can create a more airtight seal. Product cures with exposure to moisture. Use an approved hazardous waste facility for disposal.



TECHNICAL DATA SHEET

Revision: February 7, 2020
Supersedes: June 24, 2015
Ref. #: 379047 / 649735

LABEL PRECAUTIONS

WARNING: HARMFUL IF INHALED. EYE, SKIN AND RESPIRATORY IRRITANT. MAY CAUSE SKIN AND RESPIRATORY SENSITIZATION.

WARNING: Contains isocyanates and petroleum distillates. Individuals with lung or breathing problems or prior sensitization to isocyanates should not use this product. Avoid breathing vapors. Vapors may cause headaches, dizziness and nausea. Open windows and doors to ensure cross ventilation during application and until all odors are gone. Avoid contact with eyes and skin. Prolonged or repeated exposure may cause dermal or respiratory sensitization, effects may be permanent. Gloves recommended to prevent skin contact.

FIRST AID: If swallowed, call a physician or Poison Control Center immediately. Do not induce vomiting. For eye contact flush with water for 15 minutes, call a physician. For skin contact wash thoroughly with soap and water. If inhaled, move to fresh air. If symptoms develop or persist, get immediate medical attention. **INTENTIONAL MISUSE BY DELIBERATELY INHALING CONTENTS MAY BE HARMFUL OR FATAL. DO NOT TAKE INTERNALLY. KEEP OUT OF REACH OF CHILDREN.**

Refer to Safety Data Sheet (SDS) for further information

DISCLAIMER

The information and recommendations contained herein are based on our research and are believed to be accurate, but no warranty, express or implied, is made or should be inferred. Henkel recommends purchasers/users should test the products to determine acceptable quality and suitability for the intended use. All adhesive/sealant applications should be tested under simulated or actual end use conditions to ensure the adhesive/sealant meets or exceeds all required project specifications. Since assembly conditions may be critical to adhesive/sealant performance, it is also recommended that testing be performed on specimens assembled under simulated or actual production conditions. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent, without authority from the owner of the patent.

LIMITED WARRANTY

This product is warranted by Henkel Corporation to be free from defects in materials when used as directed. Henkel's sole obligation shall be, at its option, to replace or refund the purchase price of product proven to be defective. Henkel makes no other warranty – express or implied – including warranties of MERCHANTABILITY and FITNESS FOR A PARTICULAR PURPOSE and will not be liable for consequential or incidental damages. This Limited Warranty gives you specific legal rights, which vary from state to state. For warranty assistance, contact Henkel at 1.800.624.7767 M-F 9:00 am to 4:00 pm ET.



OSI Tougher than the Elements. For Professional Use Only. The Battle will be Fierce.

OSI works side by side with residential builders, contractors and remodeling professionals who use our products every day on their jobsites. OSI combines this deep understanding with the sophisticated global innovation and manufacturing excellence of Henkel to make the world's best professional-grade caulks, sealants and adhesives.

For Technical Assistance call: 1-800-624-7767 Mon – Fri 9:00am – 4:00pm ET

www.ositough.com



OSI Brand is part of the Henkel family of brands. Founded in 1876, Henkel is a global leader in the consumer and industrial businesses. Henkel operates worldwide with leading brands and technologies in three business areas: Laundry & Home Care, Beauty Care and Adhesive Technologies.

Henkel Corporation - Professional & Consumer Adhesives Headquarters - Rocky Hill, CT 06067

www.henkelna.com