

TEROSON[®]

FIGHT THE FIRE, BEAT THE HEAT WITH
OUR BRANDNEW SEALING STRIP

**The ultimate sealing strip
for modern facades:
TEROSON FO 2 FR**



A sealing strip like never before – for more protection than ever before.


Whether single-family home or public building, it has a **job: to protect** the people who live or work in it. All the more reason for us at TEROSON to work consistently on improving our sealing strips with respect to fire, moisture, sound and air protection.

A current example is our new **special sealing strip FO 2 FR**. It protects **effectively against weather and noise**. From **flexibility** to ease of **handling** – the new strip offers all the good qualities that you've come to expect in our TEROSON sealing strips for exterior facades. On top, it now also sets the benchmark with respect to **fire protection**. Being „**flame retardant**“ in accordance with **DIN EN 13501 fire protection class B s2, d0**, it meets the highest standards.

The sum total of its qualities makes it simply **unbeatable**. This new sealing strip offers you **a reliable solution where you don't need to compromise**: neither on safety nor on quality. In other words: You'll always be on the safe side **with our FO 2 FR** for exterior facades – in every respect.

System approach in sealing technology: Maximum protection without compromise

For all those who want more protection but not more work: The new **TEROSON FO 2 FR** offers you everything you would expect from a high-tech sealing strip made by Henkel. It is not only **highly vapor-permeable** and **sound-insulating**, but also ensures the **fast, easy** and **cost-effective** handling that you've become accustomed to. In addition, it now provides fire protection – **the maximum of what is technically feasible today**. Naturally, it is **an integral part of a whole sealing system** and teams up with the perfectly matched adhesive paste AD KDS FR. This product team has been awarded the **EMICODE®** quality seal and is system-certified by IBS (Institute for Technical Fire Protection) to comply with class B s2, d0. This makes our system solution all the more convincing. And provides you with extra safety.

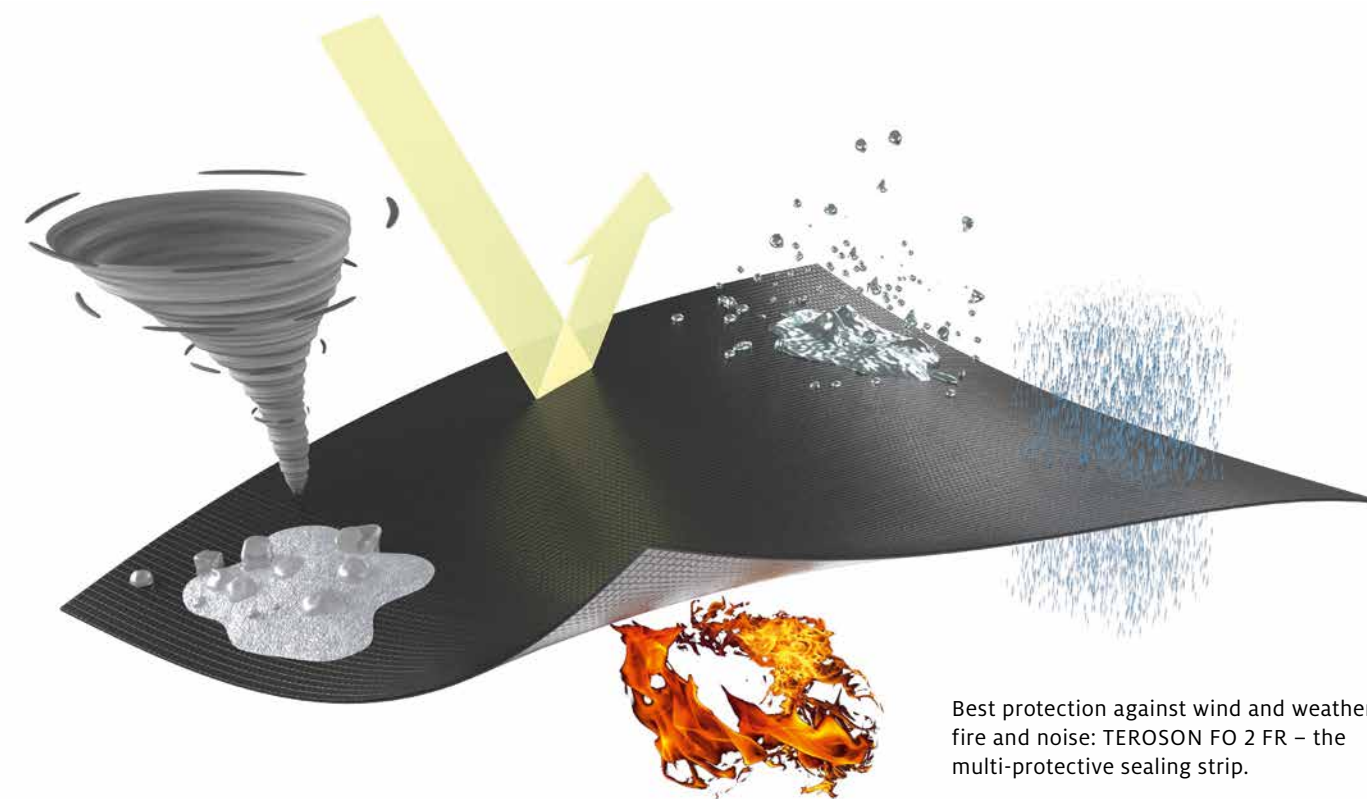

Best protection against wind and weather,
fire and noise: TEROSON FO 2 FR – the
multi-protective sealing strip.

Effective protection like never before

Uncomplicated handling as usual



Flame retardant –
complies with DIN EN 13501 flammability class B s2, d0



Sound-reducing up to 30 decibels



Watertight and at the same time vapor-permeable
(sd value 0.2 m)



Very robust and highly tearproof



Driving-rain- and airtight if applied with
TEROSON AD KDS FR adhesive paste



Certified effective fire protection
in combination with TEROSON AD KDS FR



Flexible and therefore easily moldable



Can be used down to -5°C – even on damp surfaces



No need for priming or additional mechanical fastening –
even when working overhead




UV- and bitumen-resistant



TEROSON FO 2 FR

A new sealing strip that sets a high benchmark in every respect.



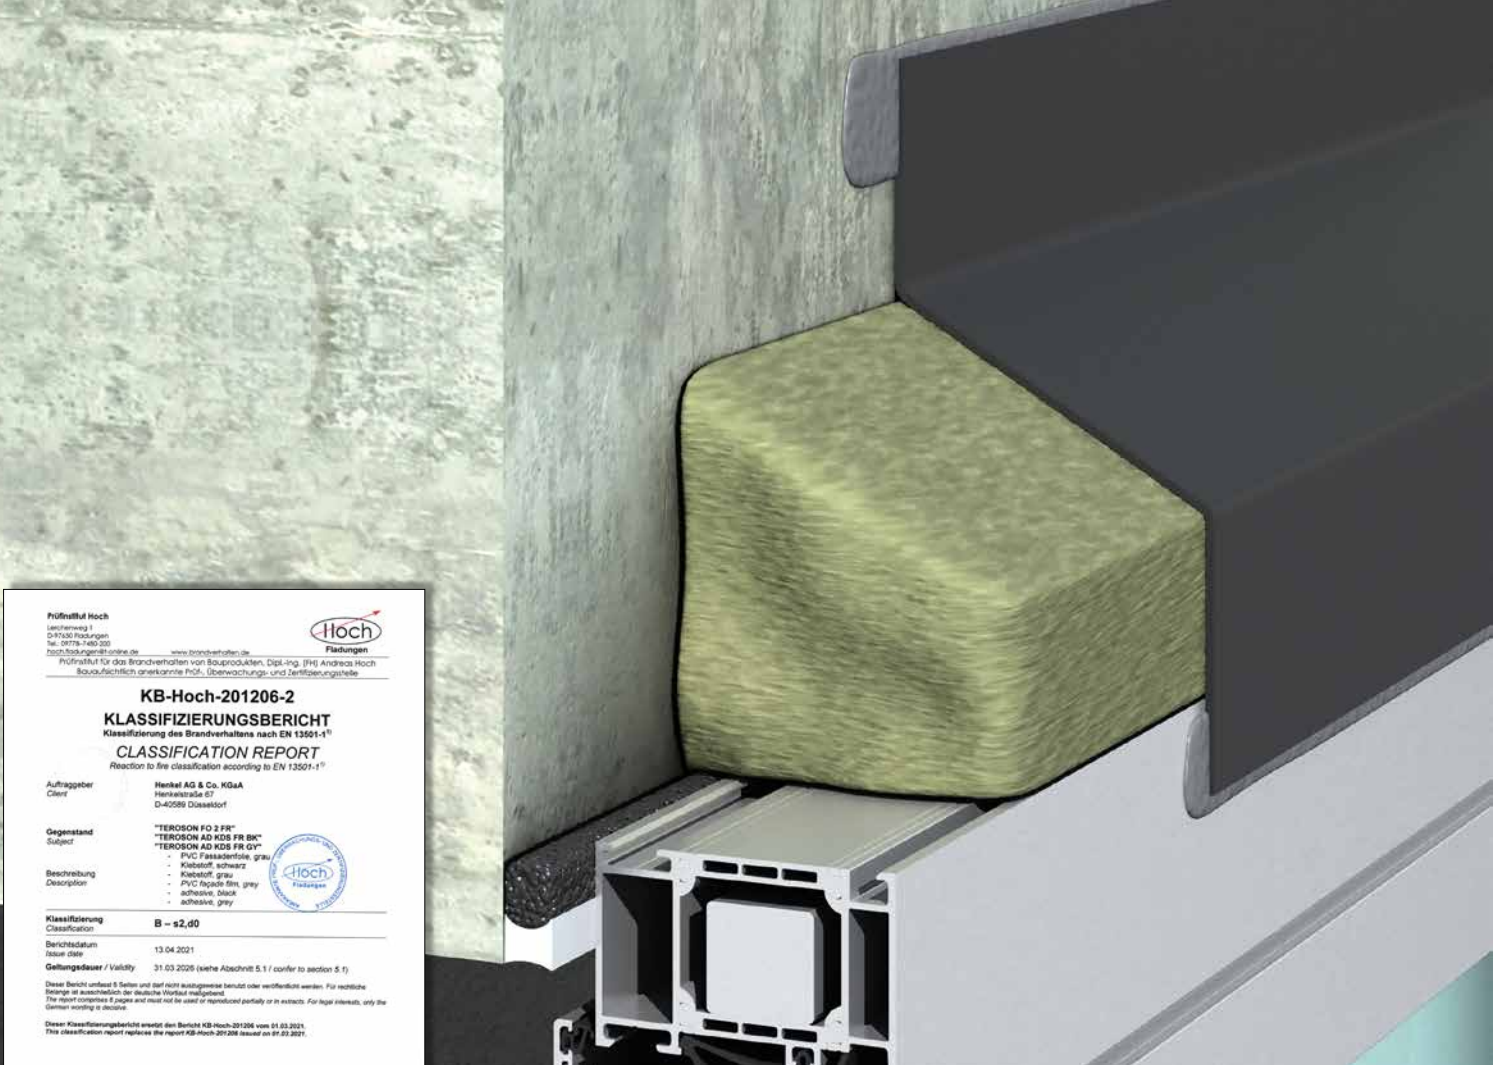

The Institute for Technical Fire Protection IBS has certified the combination of Teroson FO 2 FR sealing strip and AD KDS FR - adhesive paste as „hardly flammable“ (flammability class B s2, d0).

Ordering information:

Product	Article/IDH no.	Pack size/content	Dimensions	Content per shipping unit
TEROSON FO 2 FR	2919052	roll	25 m x 150 mm	4
	2919053	roll	25 m x 200 mm	4
	2919042	roll	25 m x 250 mm	4
	2919030	roll	25 m x 300 mm	4
	2919054	roll	25 m x 400 mm	4
	2919056	roll	25 m x 500 mm	2
	2919051	roll	25 m x 600 mm	1
	2919045	roll	25 m x 800 mm	1
TEROSON AD KDS FR	2777338	tubular bag	600 ml, grey	16
	1114419	cartridge	300 ml	12
TEROSON SE 139	882401	tubular bag	600 ml, white	12
	881593	cartridge	750 ml	12
TEROSON EF 537	691487	drum	250 kg	1
TEROSON WT 112 DB	691488	hobbock	40 kg	1

TEROSON FO 2 FR



The ultimate sealing strip for modern facades

- Flame retardant (flammability class B s2, d0 according to DIN EN 13501)
- Flexible and easily moldable – usable down to -5° C, even on damp surfaces
- No need for priming or additional mechanical fastening
- Watertight and water-resistant
- Vapor-permeable with an sd value of 0.2 m
- UV- and bitumen-resistant
- Sound-reducing up to 30 decibels

TEROSON AD KDS FR



Effective 1-component adhesive based on MS polymers

- Flame retardant (flammability class B s1, d0 according to DIN EN 13501-1)
- Special polymer paste for bonding sealing strips
- Certified as effective fire protection solution in combination with Teroson FO 2 FR
- Gap-bridging up to 20 mm and UV-resistant
- Can be used down to -5° C
- Awarded the EMICODE® quality seal and certified according to LEED, BREEAM and DGNB

TEROSON SE 139



Durable sealing solution for structural and connection joints

- Flame retardant (flammability class B s1, d0 according to DIN EN 13501)
- Pure acrylic sealant featuring 25 % movement accommodation
- Phthalate-free
- EMICODE EC1 Plus certified
- Quickly rainproof and frost-resistant
- Adheres without primer
- Highly compatible with all paints
- Complies with EN 15651-1: sealant type F-EXT-INT

TEROSON EF 537



The all-in-one solution for insulation, protection and installation

- Window installation foam with integrated sound insulation
- Flame retardant (Flammability class B1 in compliance with DIN 4102-1)
- Acoustic insulation up to 63 decibels
- Can be used down to -10° C
- Post-expansion of max. 20 %
- Very low curing pressure

TEROSON WT 112 DB



Anti-drumming compound for high-performance soundproofing and fireproofing

- Non-combustible (flammability class A2 s1, d0 according to DIN EN 13501)
- 20 % more efficient, 30 % faster, 40 % less weight
- Sprayable and trowelable
- Economical use (2:1), reduced weight (1,2 kg/m² regarding 1 mm dry coating thickness)
- Effective sound deadening

TEROSON®

Henkel AG & Co. KGaA

40191 Düsseldorf
Germany
Phone: +49 (0)211/797-0

Henkel CEE GmbH

Erdbergstraße 29
1030 Vienna, Austria
Phone: +43 (0)1/71104-0

Henkel & Cie. AG

Salinenstrasse 61
4133 Pratteln 1, Switzerland
Phone: +41 (0)61/825-7000

Information and contact: www.terason-bautechnik.com

