

LOCTITE

sonderhoff

BERGQUIST

**MATERIAL SOLUTIONS FOR
EV CHARGING INFRASTRUCTURE**

FORMULATED FOR CONTINUOUS PERFORMANCE AND SUSTAINABLE RESULTS

Henkel

Henkel Adhesive Technologies

CONTENTS

- 02** **INTRODUCTION**
- 03** **APPLICATION OVERVIEW**
- 05** **THERMAL MANAGEMENT SOLUTIONS**
- 07** **PROTECTING SOLUTIONS**
- 09** **BONDING SOLUTIONS**
- 11** **CONTACT**


INTRODUCTION

An expansive EV charging infrastructure is vital for the continued growth of the electric vehicle market. Often located in outdoor environments with long lifetime expectations, chargers of all types – from residential single-phase up to DC fast chargers – provide safe charging while protecting EV battery packs from electrical and/or thermal events.




APPLICATION OVERVIEW

Within these devices, Henkel materials deliver operational stability and performance consistency. Gasketing and protection solutions safeguard electronics against elemental exposure and contaminants; thermal interface materials improve power conversion efficiency and reliability; potting formulations deliver toughness through encapsulation and protection of connectors; and adhesives offer manufacturing productivity improvements and parts-securing strength in-application. Together, these solutions will help deliver EV charging dependability that inspires consumer confidence.

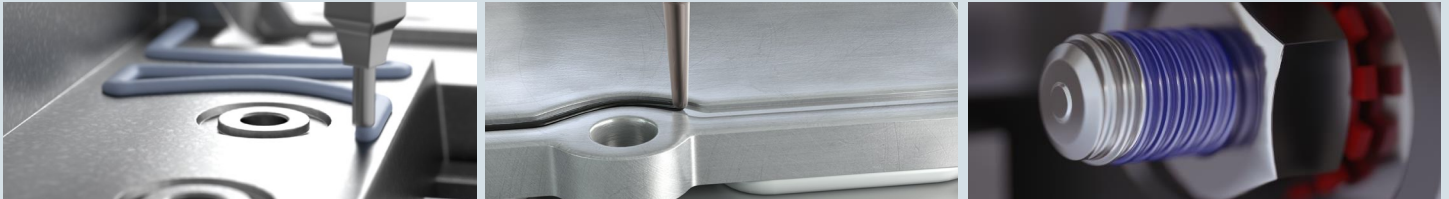

MATERIAL SOLUTIONS

AC Charging Stations

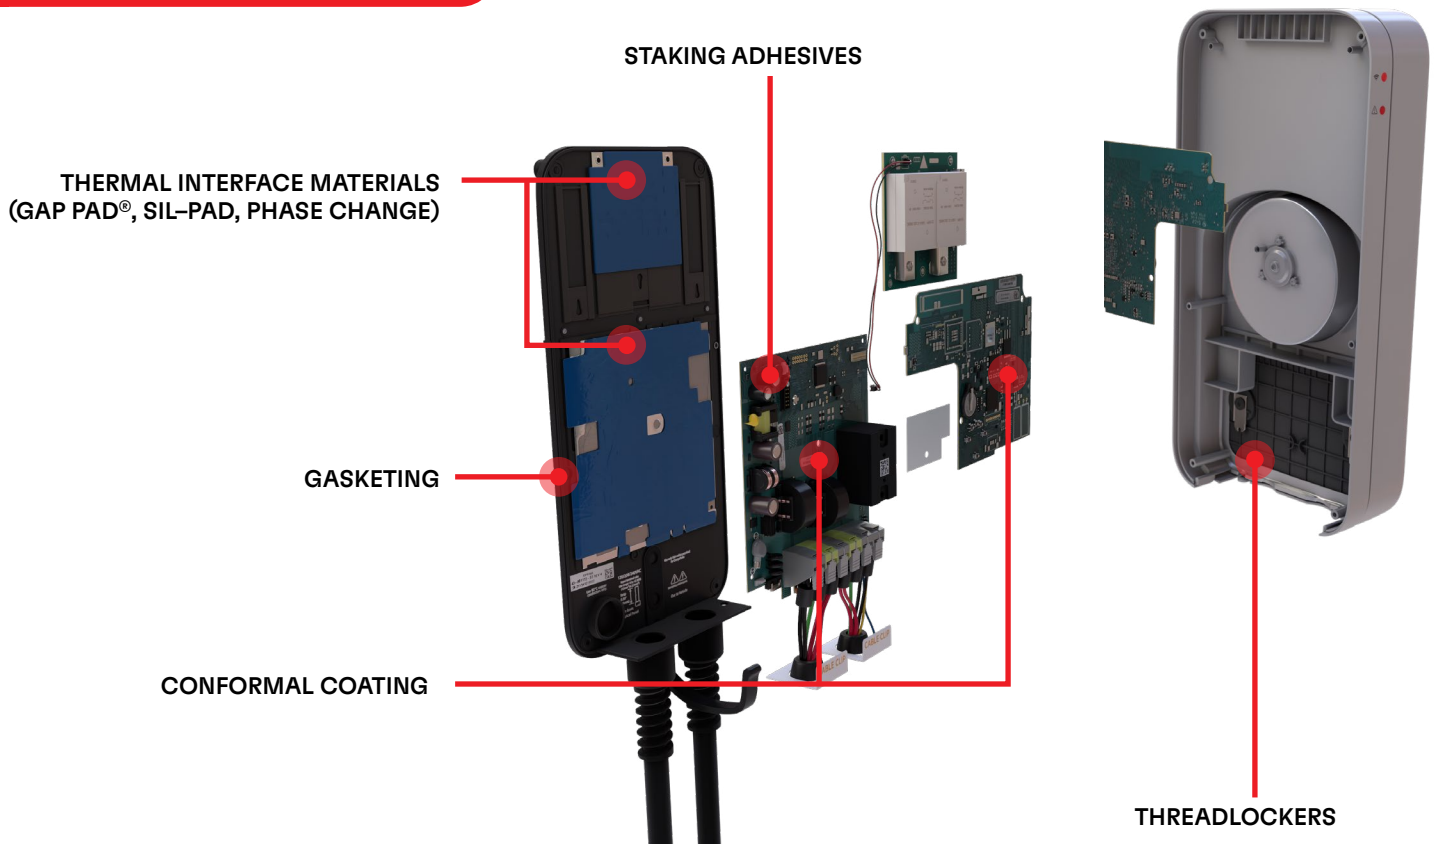


MATERIAL SOLUTIONS


DC Fast/Ultra-Fast Charging Stations




Power Module System

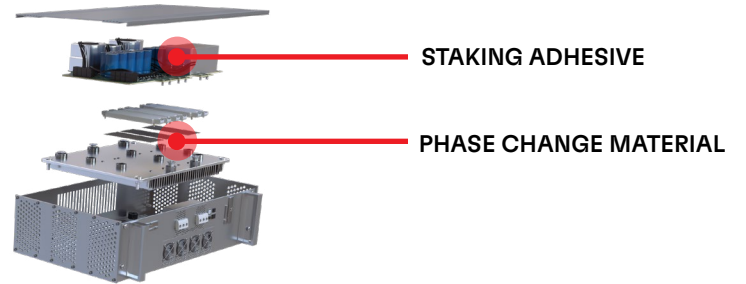

Discrete Component System

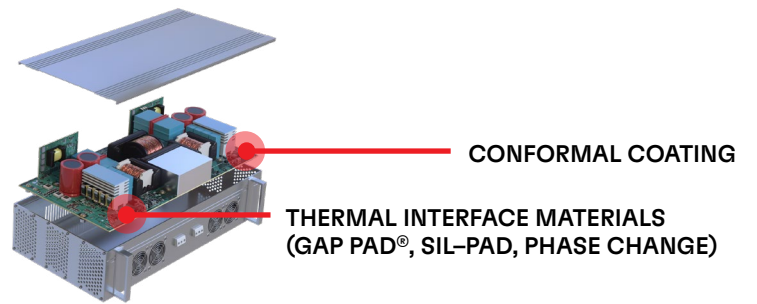


Charging Connectors

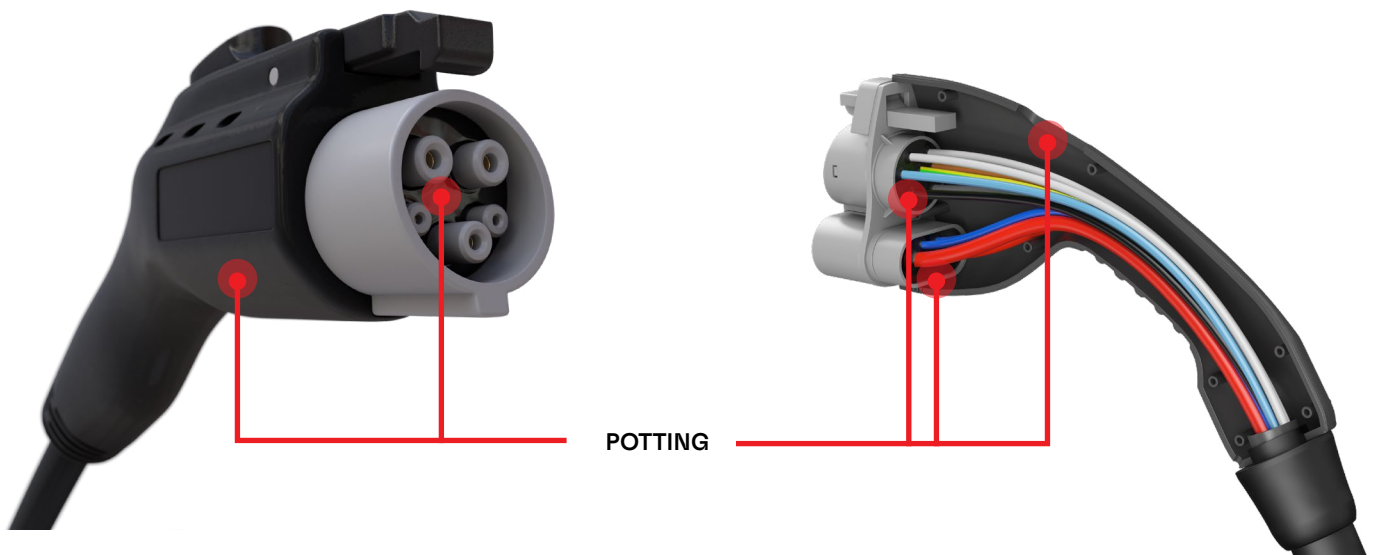

THERMAL SOLUTIONS FOR EV CHARGERS

THERMAL MANAGEMENT

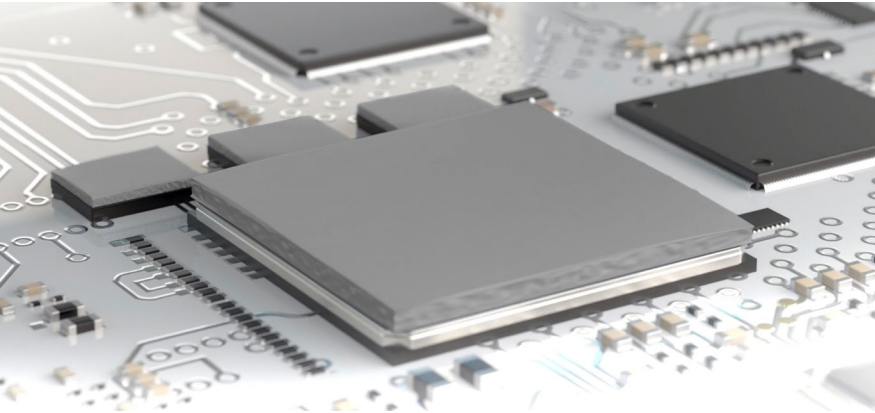

With voltage ratings as high as 500 V for DC fast chargers and up to 800 V for ultra-fast chargers, dissipating heat from power switching components and providing safety agency-recognized insulation is mission-critical for reliable operation.

GAP PAD®

Product Name	Description	Thermal Conductivity (W/m·K)	Modulus (kPa)	Dielectric Breakdown Voltage (VAC)	Thickness (mm)	Flame Rating
BERGQUIST® GAP PAD® TGP 1000VOUS	Silicone GAP PAD®	1	55	6,000	0.508 – 6.35	UL 94 V-0
BERGQUIST® GAP PAD® TGP HC3000	High compliance, silicone GAP PAD®	3	110	5,000	0.508 – 3.175	UL 94 V-0

GAP FILLER

Product Name	Description	Thermal Conductivity (W/m·K)	Viscosity (Pa·s)	Dielectric Strength (V/mil)	Cure Schedule	Flame Rating
BERGQUIST® GAP FILLER TGF 1500LVO	Two-part, silicone, low volatility gap filler	1.8	20 (High Shear) at 3000/s	400	8 hr. at 25°C or 10 min. at 100°C	UL 94 V-0
BERGQUIST® GAP FILLER TGF 3000SF	Two-part, silicone-free gap filler	3.0	18 (High Shear) at 1500/s	250	12 hr. at 25°C or 6 hr. at 85°C	UL 94 V-0
BERGQUIST® GAP FILLER TGF 4500CVO	Two-part, silicone, controlled volatility gap filler	4.5	20 (High Shear) at 1500/s	250	48 hr. at 25°C or 30 min. at 85°C	UL 94 V-0

PHASE CHANGE

Product Name	Description	Phase Change Temperature	Thermal Resistance (°C in ₂ /W)	Volume Resistivity (Ω·m)	Dielectric Breakdown Voltage (VAC)	Thickness (mm)
BERGQUIST® HI-FLOW THF 1600P	Polyimide film-based phase change material	55°C	0.13	1x10 ¹²	5,000	0.102 – 0.127


PHASE CHANGE – CONTINUED

Product Name	Description	Phase Change Temperature (°C)	Thermal Conductivity (W/m·K)	Specific Gravity	Recommended Drying Condition	Application Method
LOCTITE® TCP 4000 D	A reworkable, repeatable and dispensable phase change thermal interface material suitable for use between a heat sink and a variety of heat dissipating components	45	3.4	2	0.051 mm Thickness: 5 hr. at 22°C	Stencil, needle dispensed, screen print or manual application
LOCTITE® TCP 7000	Non-silicone and reworkable phase change material	45	>3.0	2	0.051 mm Thickness: 30 hr. at 22°C or 22 min. at 60°C or 3 min. at 125°C	Stencil or screen print

THERMALLY CONDUCTIVE INSULATING FILMS (SIL-PAD, HI FLOW)

Product Name	Description	Phase Change Temperature	Thermal Resistance (°C in ₂ /W)	Volume Resistivity (Ω·m)	Dielectric Breakdown Voltage (VAC)	Thickness (mm)
BERGQUIST® HI-FLOW THF 1600P	Polyimide film-based phase change material	55°C	0.13	1×10 ¹²	5,000	0.102 - 0.127

Product Name	Description	Thermal Conductivity (W/m·K)	Viscosity (Pa·s)	Dielectric Strength (V/mil)	Thickness (mm)	Flame Rating
BERGQUIST® SIL-PAD TSP K1300	Polyimide reinforced SIL-PAD	1.3	90	6,000	0.15 ± 0.025	UL 94 V-0
BERGQUIST® SIL-PAD TSP 1600S	Fiberglass reinforced SIL-PAD	1.6	92	5,500	0.229	UL 94 V-0

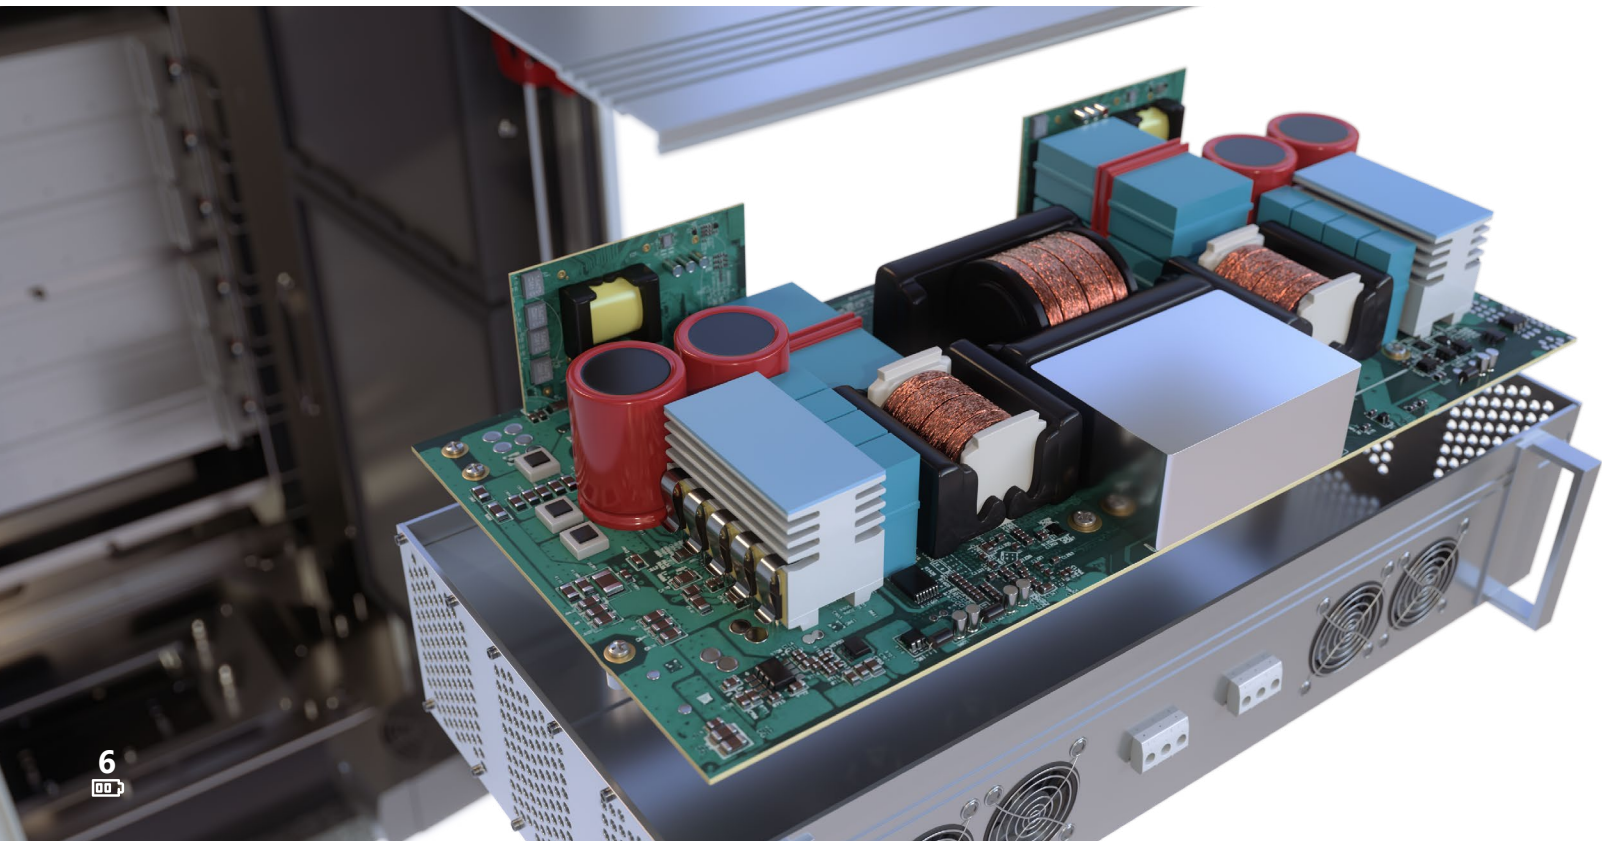


PROTECTING SOLUTIONS FOR EV CHARGERS

GASKETING/SEALING

Formed-in-place-foam-gasketing (FIPFG) and sealing products are automation-friendly formulations that allow simple deposition and easy modification for different enclosure geometries. Adhesion to multiple surfaces, adaptable curing mechanisms and an environmental compatibility range from -55°C up to 150°C help charger designers meet high-volume device processing and in-application protection metrics.


Product Name	Description	Flame Retardancy	Water Absorption	Compression Load Deflection	Temperature Resistance	Compression Set (DVR)
SONDERHOFF FERMAPOR K31	Two-Component, room temperature crosslinking polyurethane soft foam system	Up to UL 94 HF-1 possible	From <3.5% hydrophobic versions available	From 5 – 200 kPa (at 25% compression)	From -40°C ±100°C (short time up to +160°C)	<97% depending on test conditions
SONDERHOFF FERMASIL	Two-component, room-temperature crosslinking silicone foam system	Up to UL 94 V-0 possible	App.1	From 20 – 150 kPa (at 25% compression)	From -60°C ± 180°C (short time up to +350°C)	<97% depending on test conditions

Product Name	Description	Chemistry	Viscosity	Cure Condition 25°C / 50±5% RH)	Cure Type
LOCTITE® 5810F	Form in place gasketing primarily designed for sealing plastic and metal housings on electronics components	Polyacrylate	Paste	≤ 120 min.	RTV
LOCTITE® SI 5910	One-component, silicone sealant designed for sheet metal covers with good oil resistance	Oxime Silicone	Paste	≤ 40 min.	RTV
LOCTITE® SI 5699	This one-component, silicone sealant has excellent adhesion and can be used to seal electronic components	Oxime Silicone	Paste	≤ 30 min.	RTV

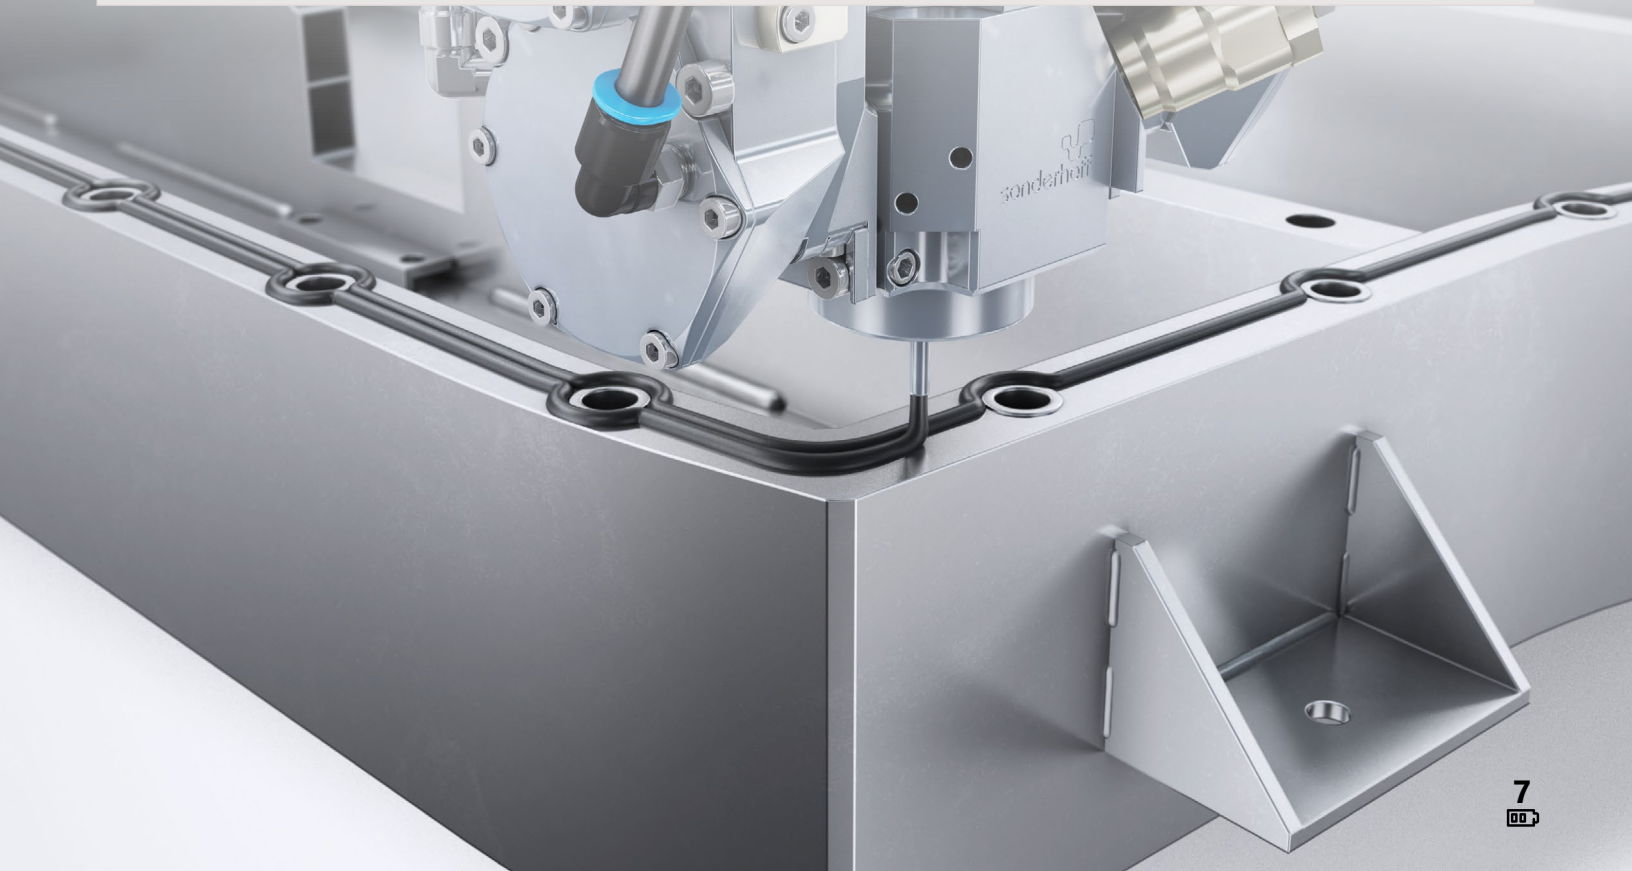

CONFORMAL COATING

Henkel conformal coatings ensure electronic operational integrity by defending electronic circuits from thermal shock, dust, moisture and dynamic environmental conditions. Simple to apply and process, these SVHC, solventless, tin-free formulas are UV and moisture cure-capable for optimized sustainable protection.

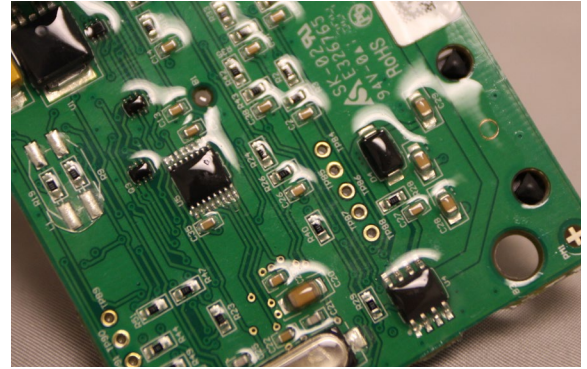


Product Name	Description	Technology	Cure Schedule	Viscosity 25°C (cP)	Operating Temperature
LOCTITE® STYCAST PC 40-UMF	Formulated to rapidly gel and immobilize when exposed to UV light and then fully cure when exposed to atmospheric moisture, ensuring optimum performance even in shadowed areas	Urethane Acrylate	10 sec. at 300 – 600 mW/cm ² [UV 365 nm] + 2 – 3 days at RT	250	-40 – 135°C
LOCTITE® STYCAST UV 7993	Designed to provide rugged protection from moisture and harsh chemicals. It is compatible with industry standard solder masks, no-clean fluxes, metalization, components and substrate materials	Urethane	10 – 20 sec. at 150 – 300 mW/cm ² [UV365nm] + 100 hr. at RT/50% RH or 50 hr. at RT / > 70% RH	120	-40 – 130°C
LOCTITE® STYCAST UV 8555	Designed to provide rugged protection from moisture and harsh chemicals, compatible with industry standard solder masks, no-clean fluxes, metallization, components and substrate materials.	Urethane Acrylate	Dual-cure (UV and moisture)	60	-40 – 130 °C

POTTING

UL-certified potting materials allow simple integration into mass production operations, providing fast curing, easy dispensing and gel time adaptability. Stable over a wide temperature and humidity range with high elongation to break, Henkel potting solutions offer tough protection and excellent dielectric properties to enable safe high-voltage operation.



Product Name	Description	Viscosity (A) mPas	Hardness Shore 00	Density g/cm ³	Flame Rating
SONDERHOFF FERMADUR A-113	Two-component polyurethane potting compounds Flexible, levels very well, low shrinkage, low surface tension	ca. 1.000	A45 – A55	1,15	UL 94 V-0
SONDERHOFF FERMADUR A-125	Two-component polyurethane potting compounds Flexible potting compound, low shrinkage, low surface tension	ca. 1.500	A65 – A75	1, 20	UL 94 V-0
SONDERHOFF FERMADUR A-173	Two-component polyurethane potting compounds Slightly foaming, flexible, high longitudinal water tightness achievable	ca. 1.000	A50	0,80	UL 94 V-0

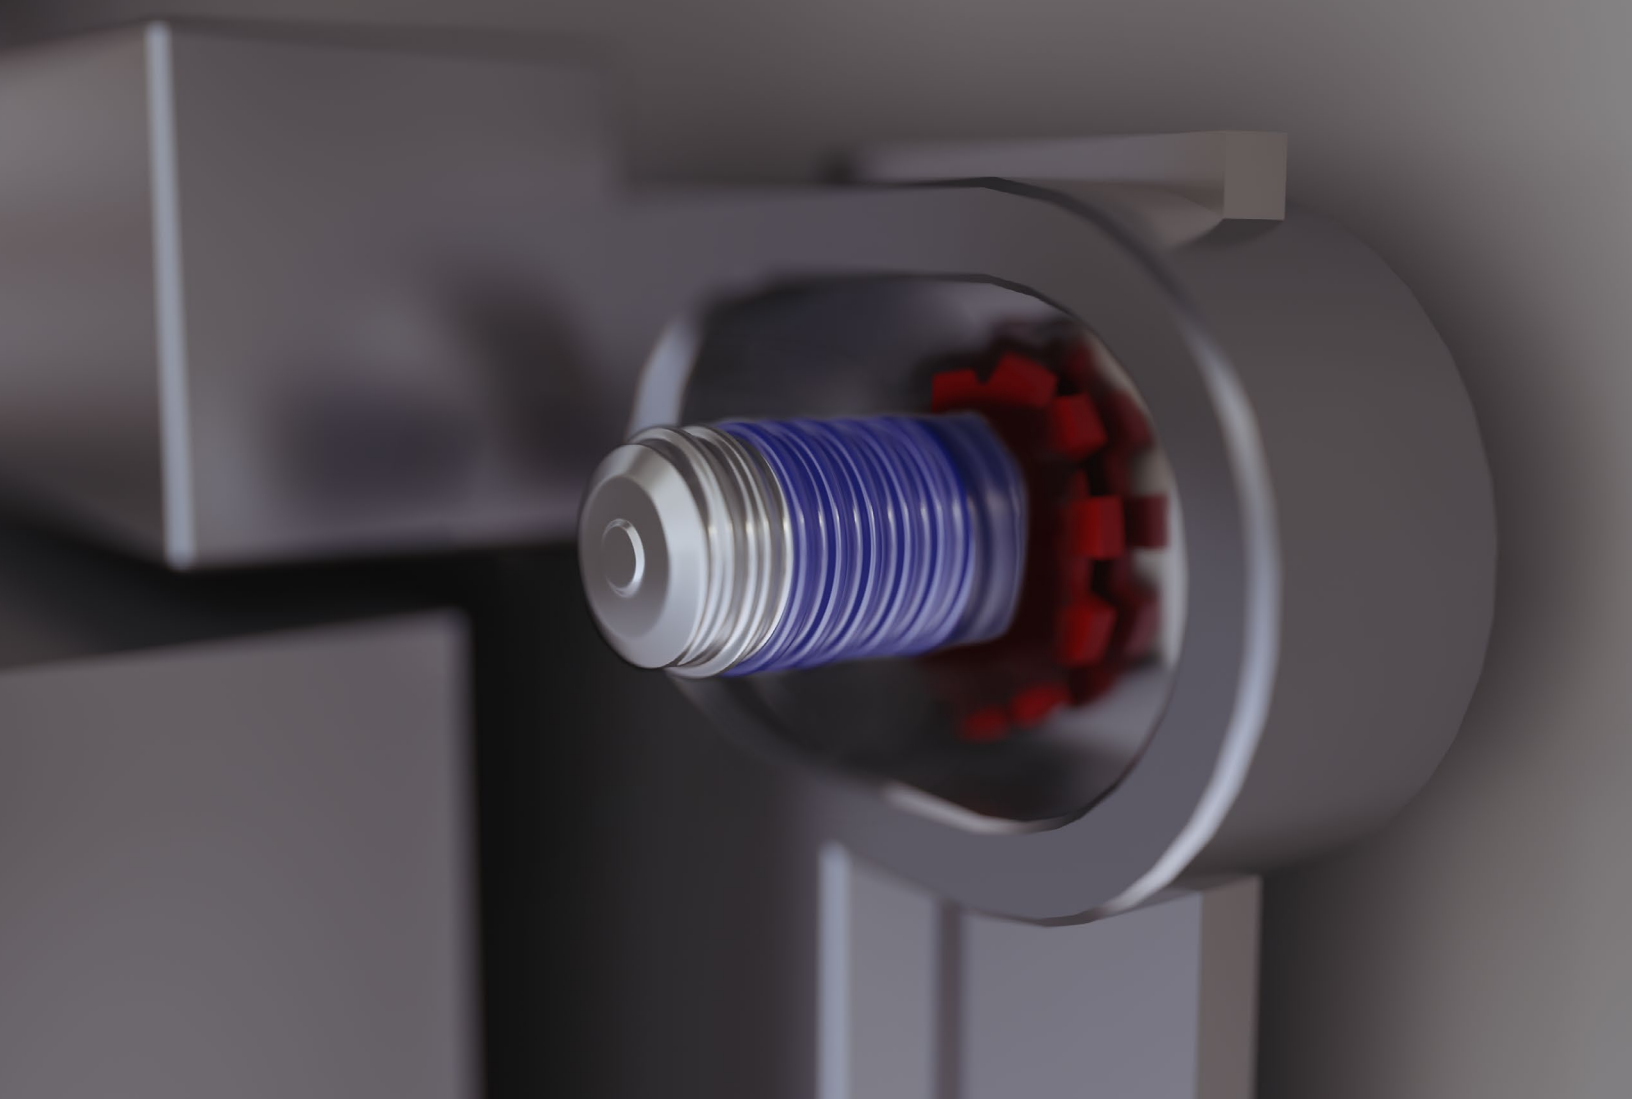

BONDING SOLUTIONS FOR EV CHARGERS

THREADLOCKER

Market-leading LOCTITE® brand threadlockers secure and seal threaded fasteners, but also allow disassembly when needed. Ideal for EV charging devices, threadlockers prevent vibration-induced loosening, seal out fluids and corrosion, and keep bolts, nuts and studs firmly in place.

Product Name	Description	Chemistry	Color	Cure Speed	Viscosity at 25°C (cP)
Acrylic					
LOCTITE® 243	General purpose threadlocker of medium bond strength. This threadlocker secures and seal bolts, nuts and studs to prevent loosening due to vibration.	Acrylic	Blue	24 hr.	1,300 – 3,000
LOCTITE® 248	Medium strength anaerobic threadlocking material. It is supplied as a wax-like semi-solid, conveniently packaged in a self-feeding stick applicator.	Acrylic	Blue, wax consistency	168 hr. at 22°C; Breakaway Torque, ISO 10964, Unseated	–

STAKING ADHESIVES

Used wherever enhanced physical strength is required, such as around large components like capacitors, Henkel staking adhesives offer additional support. Resistant to fluids, salts and alkalis, they perform well under extreme environmental conditions to ensure long-term reliability.

ASSEMBLY ADHESIVES

Product Name	Description	Chemistry	Viscosity (cP)	Volume Resistivity ($\Omega \cdot \text{cm}$ at 25°C)	Application	Cure Schedule
Acrylic						
LOCTITE® AA 3103	Cures rapidly to form flexible, transparent bonds when exposed to ultraviolet light and/or visible light of sufficient radiance and has shown excellent adhesion to a wide variety of substrates including glass, many plastics and most metals	Acrylic	11,250	–	Assembly Adhesive	50 mW/cm ² at 5 sec.
Epoxy						
LOCTITE® ABLESTIK 2151	Thixotropic, two-part adhesive that develops strong, durable high-impact bonds at room temperature, improving heat transfer while maintaining electrical insulation	Epoxy	40,000	2.10x10 ¹⁵	Assembly Adhesive	24 hr. at 25°C

CHIPBONDER

Product Name	Description	Chemistry	Viscosity (cP)	Glass Transition Temperature, T _g (°C)	Cure Schedule
Epoxy					
LOCTITE® 3609	Designed for the bonding of surface mounted devices to printed circuit boards prior to wave soldering. Particularly suited for applications where medium to high dispense speeds, high dot profile, high wet strength and good electrical characteristics are required	Epoxy	1,080 (Casson)	73	2 min. at 150°C
LOCTITE® 3616	Designed for the bonding of surface mounted devices to printed circuit boards prior to wave soldering. Particularly suited to printing a range of dot heights with one stencil thickness	Epoxy	35,000 (Casson)	140	2 min. at 150°C
LOCTITE® 3627	Designed for the bonding of surface mounted devices to printed circuit boards prior to wave soldering. Particularly suited for applications where high dot profile, high wet strength and good electrical characteristics are required. The product is also suitable for stencil print applications	Epoxy	35,000 (Casson)	105	2 min. at 150°C

**GET IN
TOUCH
WITH US**

FORMULATED FOR **CONTINUOUS PERFORMANCE** AND **SUSTAINABLE RESULTS**

Henkel materials are driving value for the Industrial Automation & Power Conversion market through high-performance formulas that secure steadily operation with effective thermal management, durable adhesion, efficient protection, reliable electrical function and long-term sustainability.

EUROPE

GERMANY

Henkel AG & Co. KGaA
(Headquarters)
Henkelstraße 67
40589 Düsseldorf

ASIA-PACIFIC

CHINA

Henkel (China)
Investment Co., Ltd.
Building 7 & Building 6 (5F-6F),
The Springs Center
No.99 Jiang Wan Cheng Road
Yang Pu District, Shanghai 200438

JAPAN

Henkel Japan Ltd. 27-7,
Shin Isogo-cho
Isogo-ku Yokohama,
235-0017

KOREA

Henkel Korea Co.,Ltd
8th Floor, Henkel Tower Building, 41,
Mapo-daero 4da-gil,
Mapo-gu, Seoul

AMERICA

USA


Henkel Corporation
One Henkel Way
Rocky Hill, CT 06067
United States



CONTACT US



LINKEDIN



[next.henkel-adhesives.com](https://www.next.henkel-adhesives.com)

The information provided herein, especially recommendations for the usage and the application of our products, is based upon our knowledge and experience. Due to different materials used as well as to varying working conditions beyond our control we strictly recommend to carry out intensive trials to test the suitability of our products with regard to the required processes and applications. We do not accept any liability with regard to the above information or with regard to any verbal recommendation, except for cases where we are liable of gross negligence or false intention. The information is protected by copyright. In particular, any reproductions, adaptations, translations, storage and processing in other media, including storage or processing by electronic means, enjoy copyright protection. Any exploitation in whole or in part thereof shall require the prior written consent of Henkel AG & Co. KGaA. Except as otherwise noted, all marks used in this document are trademarks and/or registered trademarks of Henkel and/or its affiliates in the US, Germany, and elsewhere.

© Henkel AG & Co. KGaA, 6/2024

