

Polyseal PS PG



2 part pouring grade polysulphide joint sealant

Highly flexible, non-staining joint sealant with excellent recovery



CHARACTERISTICS

- ▶ Highly resilient with excellent recovery characteristics
- ▶ Provides permanent and uniform watertight seal
- ▶ Non-staining
- ▶ Excellent resistance to fatigue and stays flexible throughout its service life—won't become brittle, caulk or crack due to ultra violet exposure
- ▶ Prevents uncontrolled cracking by allowing expansion and contraction during temperature changes
- ▶ Excellent adhesion to most common building substrates
- ▶ Good resistance to ageing. Retains joint soundness once cured
- ▶ Resistance against mild chemicals, hydrocarbon fuels, sea water
- ▶ Non-toxic. Can be used in potable water applications, swimming pools
- ▶ Does not Contain Asbestos, Chromated copper arsenate and Lead



DESCRIPTION

Polyseal PS PG is a two component pourable, self leveling polysulphide resin based joint sealant. Polyseal PS PG is specifically designed to be used as a watertight seal for moderate movement and control joints in horizontal areas. It is based on a liquid polysulphide polymer which when mixed with the hardener, cures to form a tough, flexible and non staining rubber like seal. Polyseal PS PG has excellent adhesion to concrete, stone, metals and other common building surfaces. The cured sealant has good resistance to most environmental chemicals & resists deterioration on prolonged exposure to UV. Polyseal PS PG is suitable for use in horizontal areas with a maximum slope gradient of 10%. the sealant has a movement accomodation factor (MAF) of $\pm 25\%$.

FIELDS OF APPLICATION

Sealing of movement and control joints in:

- structural floor joints
- airport runways and apron pavements
- industrial warehouses
- garages & workshops
- swimming pool floors



TDS_Polyseal PS PG_GCC_0322

1

ENVIRONMENTAL INFORMATION

Contributes toward satisfying LEED® v4 requirements of the EQ Credit- Low-emitting Materials (for the VOC content)

APPLICATION INSTRUCTIONS

Joint preparation

The joint surface must be clean, dry and free from oil,




For illustration purpose only

loose particles, cement laitance and other contaminants which may affect the adhesion. A thorough wire brushing, grinding, sand blasting or solvent cleaning may be required to expose a clean and sound substrate. The compressible joint filler shall be cut back to expose a uniform joint depth.

Quality for Professionals

Priming

Primer should be applied to clean, dry surface prior to the installation of backer rod or bond breaking tape. Polyprime PS* is recommended to be applied on porous substrates. For non-porous substrates such as steel or glass, use Polyprime NP* for optimum adhesion. The primer shall be applied by a brush in a thin coat application and shall be allowed to become tack free prior to the application of the

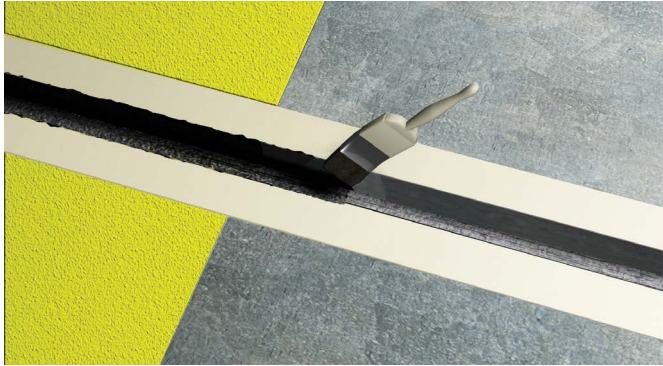

For illustration purpose only

sealant. The joint edges shall be re-primed if the sealant installation is not carried out within 3 hours of application of the primer. For obtaining a clean and neat finish, masking tape shall be applied on both the edges of the groove before applying the primer.

Back-up material

A bond breaking backing rod (Polyrod)* shall be inserted into all movement joints to avoid a three sided adhesion. Use of a backing rod will ensure proper joint depth and at the same time facilitate the formation of an hour glass profile on the applied sealant. The backer rod will also provide resistance to sealant tooling pressure and help to attain proper wetting of the substrate when the sealant is being tooled. The backing rod being inserted into the joint shall be of a diameter which is at least 20% larger but not greater 33% of the joint width. This will ensure that the backer rod remains in compression and in place during sealant installation. For static and joints where the depth is not sufficient for the use of the backing rod, a bond breaking tape may be applied to prevent the three side adhesion.

CAUTION: Do not damage or poke holes in the backer rod during or after installation, since this may cause air bubbles in the sealant and affect its performance.



For illustration purpose only

MIXING & APPLICATION

Polyseal PS PG is supplied in pre-weighed two parts pack which requires on site mixing. Pour the hardener (part B) into the base (part a) pail and mix thoroughly with a slow speed drill (300-400 rpm) fitted to a flat bladed paddle for 1-2 minutes till a uniform colour and consistency is achieved.

DO NOT PART MIX. Since the base and the curing agent ratio controls the ultimate physical properties like adhesion, durability and strength, one complete kit has to be mixed at a time. The side and base of the container shall be



For illustration purpose only

periodically scrapped with a scraper to ensure that the curing agent is properly dispersed and blended in the mix. Pour the mixed material directly into the joint from the pail. Once the sealant has been installed a suitable rounded tool soaked in soapy water can be used to achieve an hour glass profile. Any masking tape applied should be removed immediately after the sealant is installed.


LIMITATIONS

Polyseal PS PG is not recommended for:

- vertical joints
- movement joints having maf >25%
- damp and contaminated surfaces
- asphalt pavements
- over painting (paint compatibility with sealant shall be checked prior to painting) 4Joints >50mm width

JOINT DESIGNS

The width of the joint should be a minimum of 4 times the anticipated movement. Joints with cyclic movement should have a width to depth ratio of 2:1 for butt joints and 1:1

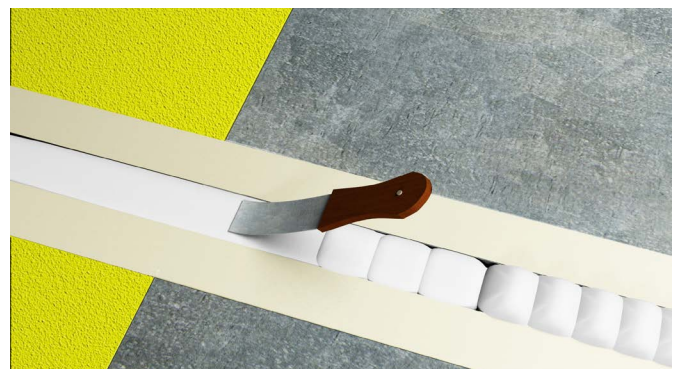

For illustration purpose only



For illustration purpose only

for floor, static and lap joints. The joint depth shall not exceed the width. The joint width and depth should be maintained as recommended:

Joint Width

- 6 mm (minimum)
- 50 mm (maximum)

Joint depth

- 6 mm
- 20mm for heavily trafficked floor joints and areas exposed to hydrostatic pressure

CLEANING

Remove all excess sealant with a scraper. Any spillage can be cleaned using Polysolvent. Clean all tools and equipments using similar solvent immediately after the tooling. Hardened materials can be removed mechanically only.

COVERAGE

Length of joints in meters filled per 1L of Polyseal PS PG

Depth [mm]	Width [mm]							
	6	10	15	20	25	30	40	50
6	27.5	16.5						
10		10	6.5	5				
15			4.4	3.3	2.6	2.2		
20				2.5	2.0	1.6		
25					1.6	1.3	1	0.8
30						1.1	0.83	0.67

Calculation based on theoretical coverage. Actual

material consumption at site will vary depending on the wastage.

MAINTENANCE

If the sealant is damaged but the bond is intact, cut out the damaged area and recaulk. If the bond has been affected, remove the sealant completely. Clean and prepare the joint in accordance with instructions under "Joint preparation" and recaulk.

STANDARDS

Polyseal PS PG complies with the requirements of: BS EN ISO 11600:2003 + A1:2011 (formerly BS 4254), BS 5212: Part 1, BS 6920 test on suitability with potable water, ASTM C 920 [Type M, Grade P, Class 25, USE T]

STORAGE & SHELF LIFE

Store in a cool, dry place and keep away from all sources of heat and sunlight. In tropical climates, store in air condition rooms. The shelf life is up to 12 months in unopened condition and if stored as per recommendations. Excessive exposure to sunlight, humidity and UV will result in the deterioration of the quality of the product and reduce its shelf life.

DISPOSAL

Mix separate product components in ratio and as supplied in suitable metal containers. Allow the mix to cure completely. Dispose as hazardous waste. It is recommended to use licensed waste disposal contractors and consult the local authority regarding the regulations

HEALTH & SAFETY

As with all construction chemical products caution should be exercised. Contains manganese dioxide. Which is corrosive and may cause burns to skin if handled without proper protection. Refer the product msds for full details. Protective clothing such as gloves and goggles should be worn. Treat any splashes to the skin or eyes with fresh water immediately. Should any of the products be accidentally swallowed, do not induce vomiting, but call for medical assistance immediately.

SUPPLY

Polyseal PS PG	4L
Polyprime PS	1L pail
Polyprime NP	1L pail
Polysolvent	5L & 20L pails
Ancillaries/equipments	Polyrod

TDS_Polyseal PS PG_GCC_0322

3

TECHNICAL SPECIFICATION

PROPERTIES	VALUES	TEST STANDARDS
Color	Grey	-
Density, [g/cc]	1.35±0.05	ASTM D 1475
Consistency	Free flowing	-
Shrinkage	Negligible	ASTM C 531
Application life, [minutes]	> 120	BS 4254
Shore 'A' Hardness	15-30	ASTM D 2240
Tack free time, [hours]	5	-
Adhesion to concrete, [N]	>25	BS 4254
Elongation, [%]	>300	ASTM D 412
UV resistance @300, [hours]	No deterioration	ASTM G 53
Water potability	Passes	BS 6920
Chemical resistance	pH 2.5 to 11.5, Hydrocarbon fuels, vegetable oil, urea, seawater	ASTM D 543
Cracking & chalking after heat ageing @70°C	No deterioration	TT-S-00227E
Initial cure @ standard conditions, [hours]	24	-
Full cure @standard conditions, [days]	7	-
Application temperature, [°C]	+5 to +40	-
Service temperature, [°C]	-20 to +80	-
Reaction to fire	Class A	ASTM E84

All values given are subject to 5-10% tolerance

TDS_Polyseal PS PG_GCC_0322

4

Apart from the information given here it is also important to observe the relevant guidelines and regulations of various organisations and trade associations as well as the respective standards. The aforementioned characteristics are based on practical experience and applied testing. Warranted properties and possible uses which go beyond those warranted in this information sheet require our written confirmation. All data given was obtained at an ambient and material temperature of +23°C and 50 % relative air humidity at laboratory conditions unless specified otherwise. Please note that under other climatic conditions hardening can be accelerated or delayed. The information contained herein, particularly recommendations for the handling and use of our products, is based on our professional experience. As materials and conditions may vary with each intended application, and thus are beyond our sphere of influence, we strongly recommend that in each case sufficient tests are conducted to check the suitability of our products for their intended use. Legal liability cannot be accepted on the basis of the contents of this data sheet or any verbal advice given, unless there is a case of wilful misconduct or gross negligence on our part. This technical data sheet supersedes all previous editions relevant to this product.



Henkel Polybit Industries Ltd.; PO Box: 293, Umm Al Quwain, UAE
 Tel: +971(6)76 70 777; Fax: +971(6)76 70 197; henkelpolybit@henkel.com
Henkel Polybit Industries Ltd.; PO Box: 5911, Dammam-31432, KSA
 Tel: +96613808 4061 / 62, Fax: +966 13 812 1164; polybitdammam@henkel.com
 www.henkelpolybit.com

Quality for Professionals